


Hydraulic Breakers | Medium & Heavy Product Range




Cutting edge technology dedicated to your productivity

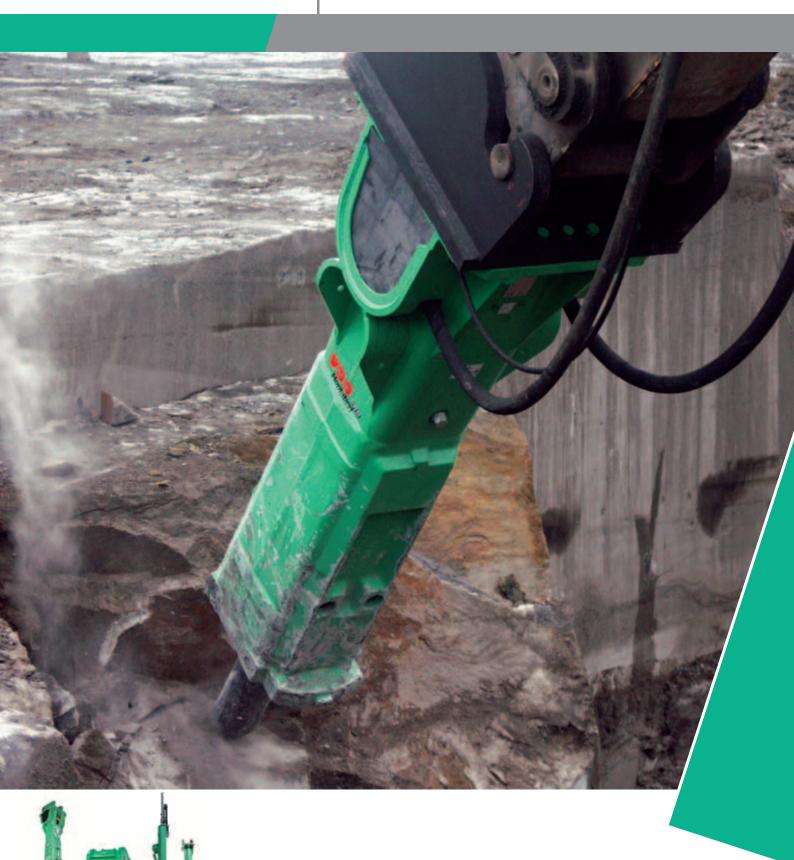

Due to a unique advanced technology, Montabert hydraulic breakers have patented designs which offer high quality, high productivity and an unbeatable robustness.

Montabert is the best option to protect your investment:

- Maximum protection of the excavator thanks to its patented mechanisms.
- High resale value due to the longevity and reliability for which Montabert products are famous.



The choice of a Montabert hydraulic breaker is an investment which will maximize the profitability of your work.

The medium range of breakers covers all makes of excavators between 12 and 25 tonnes in weight, offering reliability and solutions to the customer's needs.


The heavy range is designed to be used on excavators over 18 tonnes, for demolition work, in mines, pits and for tunnel excavation as well as public works.

This range offers the choice between two patented systems which guarantee high productivity:

- A system with 15 variable speeds (BRV system) which automatically adjusts to the ground conditions.
- A system with two automatic speeds (V1800, V2500 and V4500), ideal to break up homogeneous materials.

Their reliable design ensures downtime is kept to a minimum, thus minimizing operational costs and lengthening the lifespan of the breaker and the excavator.



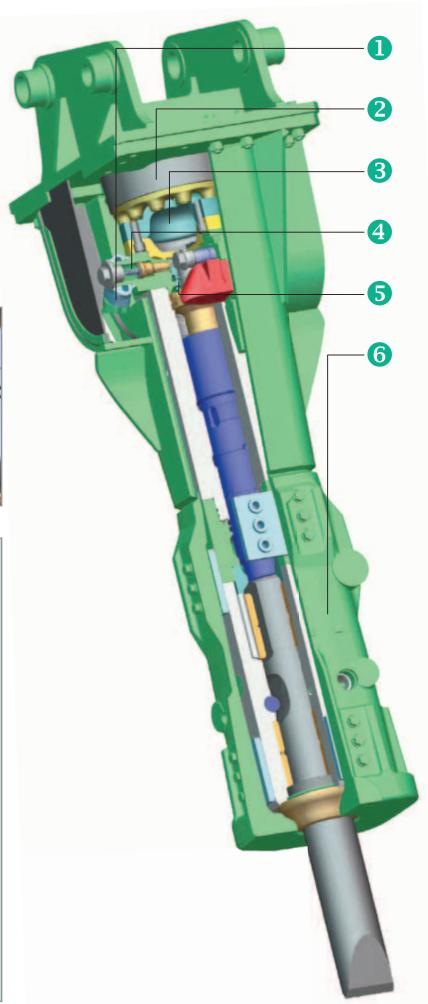





The hose swivel couplings are designed to ensure that the hoses can turn freely and avoid premature wear



The upper suspension reduces the vibrations transferred to the carrier, thereby increasing the longevity of the excavator boom



The design and components used in the breaker, together with the diaphragm technology, guarantee maximum energy for each blow



The pressure regulator automatically maintains the desired operating pressure regardless of the flow and temperature of the hydraulic oil (patented)



A recovery device enables the recycling of energy from the re-coil (upward) stroke of the piston and uses it on the next blow



The power cell of the breaker is fitted completely inside the casing and protects against wear as well as reduces noise

Unique features to maximize your profit

Productivity

- Automatic 15-speed system (V32/V45/V55/V65): the only system of speed variation allowing a perfect adaptation of energy per blow and the frequency of the blow on the hardness of the terrain, equipped with a patented TPS mechanism to protect against the breakage of the tool. This system is multifunctional and is adaptable to all types of materials for a high productivity regardless of the conditions.
- Automatic 2-speed system (V1200/V1800/V2500/V4500): high energy or high frequency (patented). Specially recommended to work on homogeneous material.
- The very favourable weight/power ratio obtained through the use of special steels enables the maximum productivity.
- Constant power regardless of the hydraulic conditions (temperature, viscosity, ...) thanks to the automatic pressure regulator.
- An energy recovery device enables the recycling of rebound energy, transmitting it to the following blow and thus increasing the power of the blow.

Save operating costs

- Because of the high productivity and the optimized hydraulic efficiency of Montabert hydraulic breakers, the energy of the excavator is better converted into shock waves than with breakers using less advanced technology, hence there is a significant saving of fuel.
- The tool bushing can be changed on site without the need of a strip down (patented) (V1800/V2500).
- Montabert's high standard of reliability reduces downtime.

Reliability

- Superior reliability thanks to the choice of steel and the manufacturing quality of Montabert.
- Blank fire protection.
- Energy chamber with diaphragm reduces the pressure variations in the hydraulic circuits in order to supply a high constant energy to the hydraulic breaker.
- Heavy duty casing reduces noise and protects the hydraulic breaker from dust and foreign objects. From the V2500 upwards, the breaker case incorporates a cast bottom. This significantly increases resistance to wear compared to a traditional casing fabricated from steel.
- Protection against overflow and overpressure (patented).

Options

- Pressurization kit for underwater work.
- "Tunnel" versions.
- Silent series version starting at V1800, optionally available for M700-M900-V1200-V32.







Specifications

		700 700MS	900 900MS	V32 V32MS	V1200 V1200 MS	V1800	V45	V2500	V55	V4500	V65
Carrier weight	t	12 - 20	15 - 25	18 - 30	18 - 30	20 - 35	27 - 40	27 - 40	35 - 50	45 - 80	45 - 90
Weight with top bracket and tool	kg	989 1044	1120 1190	1450 1525	1739 1805	1884	2547	2571	3430	4500	5589
Diameter of the tool	mm	112	118	122	122	140	150	160	170	190	202
Working length of the tool	mm	502	475	546	545	674	580	781	644	754	795
Input power*	kW	33	31	38	44	61	73	65	88	117	116
Frequency	blows/ min	880	800	400 - 1050	540 - 770	310 - 800	510 - 1160	350 - 800	440 - 1045	500-750	380 - 950
Total length with tool, without top bracket	mm	1977	2120	2290	2500	2558	2658	2853	2925	3310	3510
Oil flow	l/min	80 - 140	100 - 150	120 - 170	120 - 170	140 - 220	180 - 265	175 - 250	240 - 320	280 - 380	380 - 420
Working pressure of the breaker	bar	140	125	135	155	165	165	155	165	185	165
Acceptable back-pressure	bar	16	10	6	12	25	6	25	6	25	6
Working speeds		1	1	15 auto	2 auto	2 auto	12 auto	2 auto	12 auto	2 auto	12 auto
Greasing station		Option	Option	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard
Swivels		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes

 $^{^{\}star}$ Possible increase of the breaker's power by 50% thanks to the energy recovery system.









Montabert: an international presence in more than 100 countries. Optimize the performance of your demolition accessories by contacting our network which is designed to support our products. The Montabert network will provide you with expertise during implementation, maintenance with original spare parts, technical assistance and training.

mail.info@montabert.com www.montabert.com



