

Engine	WeiChai WP6G175E201
Gross Power	129 kW (173 hp) @ 2,000 rpm
Net Power	119 kW (160 hp) @ 2,000 rpm
Operating Weight	13,200 kg
Standard Bucket Size	2.7 m <sup>3</sup>
Standard Breakout Force	114 kN
Standard Dump Clearance	2,810 mm

# 842H

WHEEL LOADER

 **LIUGONG**



TOUGH WORLD. TOUGH EQUIPMENT.



# 842H SPECIFICATIONS >>>

## ENGINE

Emission Regulation	Tire 2 / Stage II
Make	WeiChai
Model	WP6G175E201
Gross Power	129 kW (173 hp) @ 2,000 rpm
Net Power	119 kW (160 hp) @ 2,000 rpm
Peak Torque	810 N · m @ 1,400 rpm
Displacement	6.75 L
Number of Cylinder	6
Aspiration	Turbocharged & Air-to-air inter-cooled

## TRANSMISSION

Transmission Type	Planetary, power shift
Torque Converter	Double stage, four elements
Maximum Travel Speed, fwd	43 km/h
Maximum Travel Speed, rev	19.4 km/h
Number of Speed, fwd	2
Number of Speed, Rev	1

## AXLES

Differential Front Type	Conventional
Differential Rear Type	Conventional
Axle Oscillation	±10.5°

## STEERING


Steering Configuration	Articulated
Steering Relief Pressure	17.2 MPa

## BRAKES

Service Brake Type	Caliper discs brake
Service Brake Actuation	Air over hydraulic
Parking Brake Type	Flexible shaft control
Parking Brake Actuation	Mechanical

## HYDRAULIC SYSTEM

Main Pump Type	Gear
Main Relief Pressure	19 MPa
Raise	5.6 s
Dump Time	1.0 s
Float Down Time	3.0 s
Fastest Total Cycle Time	9.6 s

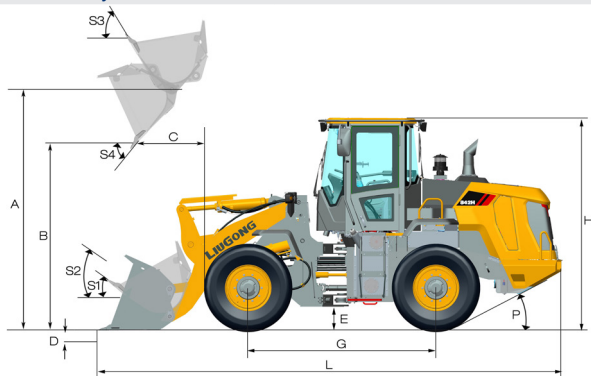

## LOADER ARM PERFORMANCE with Standard Bucket 2.7 m³

Tipping Load - Straight (ISO 14397-1:2007)	10,000 kg
Tipping Load - Full Turn (ISO 14397-1:2007)	8,200 kg
Bucket Breakout Force	114 kN
A Maximum Hinge Pin Height	3,809 mm
B Dump Clearance at Full Height Discharge	2,810 mm
C Dump Reach at Full Height Discharge	1,195 mm
D Maximum Digging Depth, Bucket Level	45 mm
S <sub>1</sub> Rollback at Ground Level	42°
S <sub>2</sub> Bucket Rollback at Carry	48°
S <sub>3</sub> Bucket Rollback at Maximum Height	61°
S <sub>4</sub> Maximum Dump Angle at Full Height	45°

## BUCKET PERFORMANCE

Reference Bucket	1.8-4.0 m³
------------------	------------

## DIMENSIONS

E Ground Clearance	384 mm
G Wheelbase	3,000 mm
H Cab Height	3,300 mm
J Wheel Tread	1,950 mm
K Width Over Tires	2,480 mm
L Length with Bucket Down	7,780 mm
M Turn Angle, Either Side	40°
P Rear Angle of Departure	28°
R <sub>1</sub> Turning Radius, Bucket Carry	5,971 mm
R <sub>2</sub> Turning Radius, Outside of Tire	5,393 mm
W Width Over Bucket	2,770 mm

## TIRES


Tire Size	20.5 - 25
-----------	-----------

## OPERATING WEIGHTS

Operating Weight	13,200 kg
------------------	-----------

## SERVICE CAPACITY

Fuel Tank	190 L
Engine Oil	18 L
Cooling System	40 L
Hydraulic System	115 L
Transmission and Torque Converter	45 L
Axles, Each	22 L

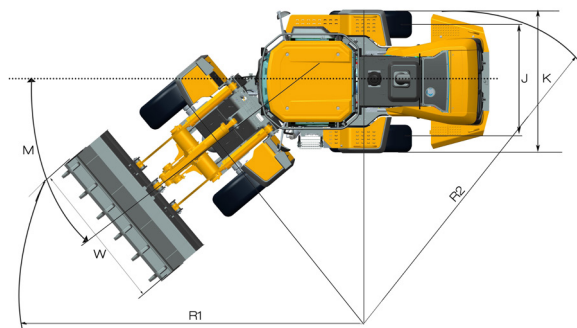

Guangxi Liugong Machinery Co., Ltd.

No. 1 Liutai Road, Liuzhou, Guangxi 545007, PR China  
 T: +86 772 3886124 E: overseas@liugong.com  
 www.liugong.com

08/2018 Designed by LiuGong

Specifications and designs are subject to change without notice. Machines shown may include optional equipment. LiuGong standard and optional equipment may vary from region to region. Please consult your LiuGong dealer for information specific to your area.