

Standard Configurations

- Overload Sensor and Alarm
- Tilt/Slope Sensors and Alarm
- Self-closing/Self-catching Gate
- Higher Platform Rails (Foldable)
- Solid Non-marking Tires
- Swing-out Component Trays
- Descent Protection and Alarm
- Flashing Beacons (Both Sides)
- Pothole Protectors
- Universal Control Box
- Quick Disconnect for Control Box
- Foot Pedal Extended Platform
- LED Battery Charging Indicator
- Lanyard Points
- Manual Brake Release
- Emergency Descent
- Horn and Hour Meter
- Full Height Drive
- Intelligent Diagnostic System
- AC Platform Power (GFCI)
- Charging Protection System
- Wind Rating Stickers

ANSI A92.20 Slab Scissor Lifts

LGMG

LGMG North America Inc.

HYDRAULIC MOTOR DRIVE


AS2632 Scissor Lift (Indoor)

- Hydraulic machines are the most affordable option
- Top-of-the-line hydraulic systems make these machines run smoothly
- Specifically designed ridges in the swing-out trays catch possible drips
- Tough, reliable, and built to last



Product Specifications AS2632

| | |
|-------------------------------------|----------------|
| Platform Capacity | 510 lbs |
| Platform Occupants (Indoor/Outdoor) | 2/0 |
| Platform Height | 26' |
| Machine Length | 7' 11" |
| Machine Width | 2' 8" |
| Machine Height (Rails Up) | 7' 7" |
| Machine Height (Rails Down) | 6' 5" |
| Platform Extension | 3' |
| Deck Extension Capacity | 265 lbs |
| Drive Speed (Lowered) | 2.2 Mph |
| Drive Speed (Elevated) | 0.5 Mph |
| Lift Time | 31 Secs |
| Lower Time | 40 Secs |
| Gradeability | 25% |
| Max Slope/Tilt | 1.5°/3° |
| Amp Hours | (4) 6V x 225Ah |
| Maximum Ground Bearing Pressure | 123 PSI |
| Tire Size | 15" x 5" |
| Ground Clearance | 3' 9" |
| Machine Weight | 4,718 lbs |

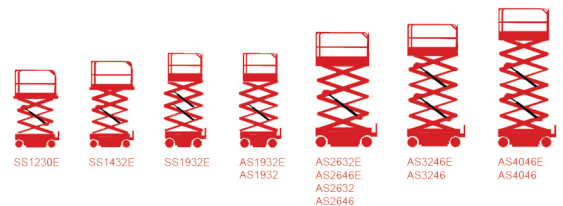

ANSI A92.20 Compliant



LGMG North America Inc.

Address: 1445 Sheffler Drive, Chambersburg PA 17201
Email: sales@lmgna.com

Local Sales Contact: