


DYNAPAC

Part of the Atlas Copco Group

CC1200C Combi rollers



Technical data

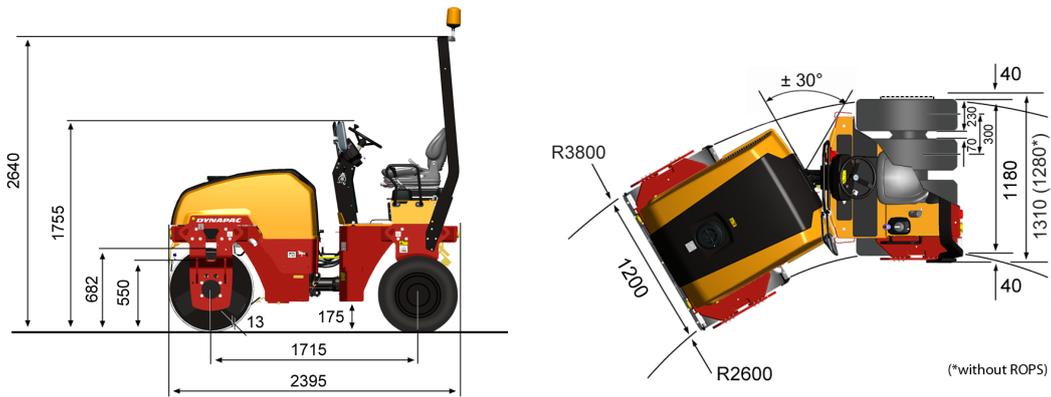

Masses	CC1200C
Max. operating mass	2,570 kg
Operating mass (incl. ROPS)	2,430 kg
Module mass (front/ rear)	1,260/ 1,170 kg
Traction	
Speed range	0-7
Theor. gradeability	60 %
Compaction	
Static linear load	10.5 kg/ cm
Wheel load	290 (kg/ wheel)
Tyre type (smooth)	640x240-15
Nominal amplitude	0.5 mm
Vibration frequency	58 Hz
Centrifugal force	27 kN
Water tank (l)	160
Emulsion tank	30 l
Engine	
Manufacturer/ Model	Kubota D1703- M
Type	Water cooled
Rated power, SAE J1995	26 kW (35 hp) @ 2,800 rpm
Fuel tank capacity	50 l
Hydraulic system	
Driving	Axial piston pump with variable displacement. Radial piston motors (3) with constant displacement.
Vibration	Gear pump/ motors with constant displacement.
Steering	Gear pump with constant displacement.
Service brake	Hydrostatic in forward and reverse lever.
Parking/ Emergency brake	Failsafe multidisc on drum and wheel motors.

Find your local dealer at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines.
The above information is a general description only, all informations are supplied without liability.