

Engine Cummins 6BTA5.9
Net Power 118 kW (160 hp) @ 2,200 rpm
Working Width 2,750 mm
Operating Weight 26,000 kg

6526 ROLLER

LIUGONG



TOUGH WORLD. TOUGH EQUIPMENT.

6526 SPECIFICATIONS >>>

ENGINE	
Emission Regulation	Tier 2 / Stage II
Make	Cummins
Model	6BTA5.9-C180- II
Gross Power	132 kW (177 hp) @ 2,200 rpm
Net Power	118 kW (160 hp) @ 2,200 rpm
Peak Torque	750 N · m
Number of Cylinders	6
Aspiration	Turbocharged
Cooling Type	Water

ELECTRICAL SYSTEM	
System Voltage	24 V

DRIVE TRAIN	
Theoretical Gradeability, without/ 20 % with Vibration	
Transmission Type	Power shift
Maximum Speed, fwd	20 km/h
Inside Turning Radius	<6,250 mm
Outside Turning Radius	<9,000 mm

AXLES	
Steering System	Hydraulic
Steering Method	Articulation
Steering Angle	±30°
Steering Relief Pressure	16 MPa

BRAKES	
Service Brake Type	Caliper dry disc
Service Brake Actuation	Air over hydraulic
Parking Brake Actuation	Spring apply, Hydraulic release



TIRES	
Tire Size	11.00 - 20 -16 PR
Tire Tread	G - 1B

HYDRAULIC SYSTEM	
Main Pump Type	Vane
Main Relief Pressure	16 MPa

OPERATING WEIGHTS	
perating Weight with Ballast	26,000 kg

SERVICE CAPACITIES	
Fuel Tank	220 L
Engine Oil	14 L
Cooling System	32 L
Transmission and Torque Converter	27 L

OPTIONAL EQUIPMENT	
Rotary Beacon	
Backup Alarm	

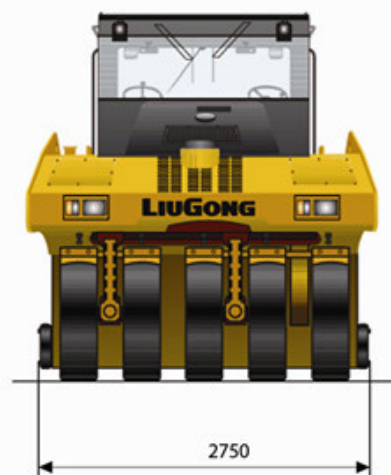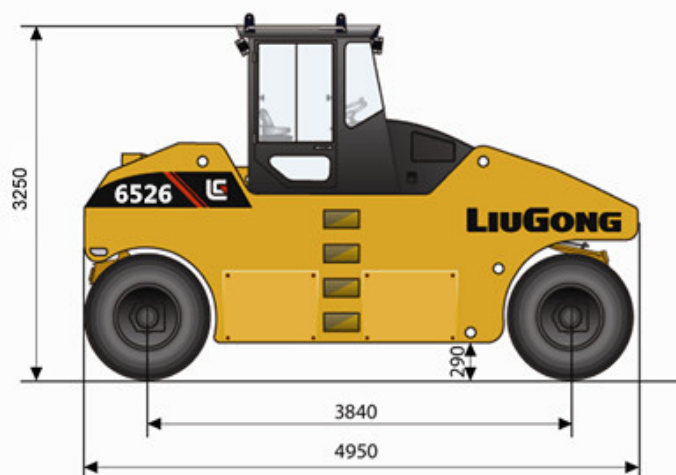

Unit: mm

Guangxi Liugong Machinery Co., Ltd.

No. 1 Liutai Road, Liuzhou, Guangxi 545007, PR China
T: +86 772 3886124 E: overseas@liugong.com
www.liugong.com

05/2014 Designed by LiuGong

Specifications and designs are subject to change without notice. Machines shown may include optional equipment.