

# KOMATSU®

## D39EXi-24 D39PXi-24

Tier 4 Final Engine

### CRAWLER DOZER

# D39i



Photo may include optional equipment.

**intelligent**  
**MACHINE CONTROL**

#### NET HORSEPOWER

105 HP @ 2200 rpm  
78 kW @ 2200 rpm

#### OPERATING WEIGHT

D39EXi-24: 21,848 lb 9910 kg  
D39PXi-24: 23,148 lb 10500 kg

#### BLADE CAPACITY

2.89–3.14 yd<sup>3</sup>  
2.21–2.40 m<sup>3</sup>

# WALK-AROUND

## Next Generation Intelligence

### No Cables

No coiled cables between machine and blade.

### No Climbing

GNSS antenna and mast removed from blade.

### No Connections

No daily connections required between machine and blade.

### Innovative

Automated blade control from rough dozing to finish grade.

### Integrated

Standard factory installed machine control system.

### Intelligent

New dozing mode, load control performance features.

D39EXi/PXi-24



Photo may include optional equipment.

### NET HORSEPOWER

105 HP @ 2200 rpm  
78 kW @ 2200 rpm

### OPERATING WEIGHT

D39EXi-24: 21,848 lb 9910 kg  
D39PXi-24: 23,148 lb 10500 kg

### BLADE CAPACITY

2.89–3.14 yd<sup>3</sup>  
2.21–2.40 m<sup>3</sup>

## INNOVATIVE. INTEGRATED. INTELLIGENT.



**Standard Intelligent Machine Control**  
Standard factory installed integrated 3D GNSS (Global Navigation Satellite System) intelligent machine control system.

**Improved Machine Control**  
Up to 8% more efficient dozer operation than comparable aftermarket machine control systems in start to finish grading tests.

### Factory Installed Machine Control Components

Machine control components are factory installed and designed as an integral part of the base machine for improved durability.

### Komatsu Quality

Machine control components and system validated to Komatsu's rigorous quality & durability standards.

### Industry Standard Compatibility

Machine control system makes use of common industry design data file norms and supports typical base station communication.

### Simple Operator Interface

Simple touch screen control box with multi-color customizable display.

### 3D GNSS Machine Control (Standard)

All on-machine components are standard including control box, GNSS receiver/radio, GNSS antenna, and enhanced inertial measuring unit sensor.

### Finish Grade Performance

Enhanced sensor package and intelligent logic provides for finish grade accuracy in an integrated system without traditional blade mounted sensors.

### Enhanced Inertial Measuring Unit (IMU+)

Chassis mounted enhanced inertial measuring unit (IMU+) and intelligent logic provides for finish grade accuracy without blade mounted sensors.

### Cab Top GNSS Antenna

Load control intelligence controls blade elevation to improve productivity and minimize track slip by adjusting blade load. 1.0' from grade or 0.1' from grade – you can run in auto mode.

### Intelligent Dozing Mode Settings

Operators are able to select between 4 distinct machine control operating modes to optimize performance to the application whether cutting, spreading, or other.

### Operator Selectable Load Settings

Machine control load settings can be adjusted between presets to tailor response to material conditions.

**SAA4D95LE-7 variable flow turbocharged and aftercooled 3.26 liter diesel engine** provides excellent fuel economy. This engine is EPA Tier 4 Final emissions certified.

**Variable Flow Turbocharger** uses a simple valve to provide optimum air flow under all speed and load conditions.

**Komatsu Diesel Oxidation Catalyst (KDOC) and Selective Catalytic Reduction (SCR) systems** reduce particulate matter and NOx using passive regeneration 100% of the time. No active or manual regeneration is required.

**New Komatsu Auto Idle Shutdown** helps reduce excessive idle time.



Photo may include optional equipment.

### Efficient Cooling System:

- Electronically controlled, hydraulically-driven fan is manually reversible
- Radiator cover with gas assisted lift cylinders, opens easily for cleaning
- Side-by-side coolers with increased cooling capacity

### Integrated ROPS cab features:

- Large, quiet, and pressurized cab
- Excellent visibility with integrated ROPS structure
- Heated air-ride seat with high capacity suspension (standard)
- Standard aux jack and (2) 12V power converters

**Self-adjusting idler** support provides constant and even idler tension, reducing vibration and increasing undercarriage life.

**Parallel Link Undercarriage System (PLUS)** provides up to double the wear life and lowers repair and maintenance costs.

**New Triple Labyrinth Final Drive** provides additional protection for the final drive floating seals.

**Power Angle Tilt (PAT)** dozer with manually adjustable blade pitch increases productivity in a variety of applications.

### Complete operator blade control:

- Palm Command Control System (PCCS)
- Electronic Proportional Control (EPC)
- Adjustable Quick shift and Variable shift modes
- Blade angle switch
- New three blade control settings
- Multiple Operator memory storage

### Efficient Hydrostatic Transmission with electronic control:

- Customizable quick shift (3 speed) settings for the operator
- Variable speed selection (20 speeds)
- Low speed matching technology (larger displacement pumps/efficient engine speed)
- HST control system can reduce fuel consumption

# INTELLIGENT MACHINE CONTROL


## Automatic Blade Control, Ranging from Heavy Dozing to Finish Grading

The D39EXI/PXI-24 features a 3D Global Navigation Satellite System (GNSS\*) machine control system which automatically controls the blade elevation and tilt per target design data. Not only can the automatic machine control features be used for finish grading but also for heavy (rough) dozing. Loading of the blade at the start of the cut is controlled per set parameters. During the pass,

if the load on the blade increases during heavy dozing operation, the blade is automatically raised to control the load and minimize shoe slip to ensure efficient dozing. When the blade approaches the target design surface, the blade will follow it for accurate finish grading.

\* GNSS is the general term for satellite positioning systems such as GPS and GLONASS.

1. Blade moves to target surface until load reaches a preset level.
2. The blade automatically raises to minimize track slip.
3. Should the load decrease, blade will lower to re-load blade to an optimum level.

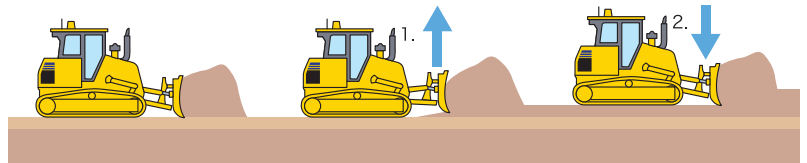

## Operator Selectable Dozing Mode, Blade Load Settings

### Dozing mode settings

Optimize machine performance for the given operation type.



**Cutting and carry**  
Long, shallow cuts



**Cutting**  
Front to back dozing



**Spreading**  
Spreading a pile of material



**Simple grading**  
Severe grade breaks, transitions

### Auto/manual switch

Multiple passes, forward and reverse, can be made with automatics activated the entire time.



### Function switches

#### Cut/fill offset switch

The cut/fill offset setting can be quickly adjusted by hand.

#### Back grade mode switch

The back grade mode can be quickly turned on or off.



Cut/fill offset switch

Back grade mode switch

## As-built Mapping Display for Checking Construction Progress

Cab top GNSS antenna provides for accurate as-built surface data collection by measuring actual elevations as machine continuously tracks in operation.



### Blade load mode settings

Tailor blade loads to material conditions.



**Light**  
Low traction application, low blade load due to material characteristics



**Normal**  
Typical operation



**Heavy**  
High traction application, high blade load due to material characteristics

### Blade load mode Dozing mode



D39EXI/PXI-24



**Machine Control System for High-performance, High-quality and High-durability**

**GNSS antenna**

Mounted to top of cab to minimize damage – not on the blade.



**Enhanced inertial measuring unit (IMU+)**

Chassis mounted IMU and intelligent logic enables accurate grading performance without blade mounted sensors.



**Control box**

Easy to use touchscreen display features bright graphics and customizable views. Mounting allows viewing angle to be adjusted per operator preference.

**Stroke sensing hydraulic cylinders**

Robust stroke sensing hydraulic cylinders employ proven Komatsu sensor technologies for accurate finish grade performance.



**CONTROL BOX**

1 Left window  
2 Main window  
3 Lower window  
4 Dozing mode selection  
5 Blade load selection  
6 Take a topo shot  
7 Toggle AS-BUILT mode  
8 Start/Stop AS-BUILT updates  
9 Sitelink messaging  
10 Sitelink activity  
11 iB logo key  
12 Zoom in key  
13 Zoom out key  
14 Toggle main view

1 Elevation control key 2 Slope control key 3 GNSS status 4 Radio status 5 Cut / Fill offset 6 Cut / Fill reading  
7 Sitelink indicator 8 Tilt of blade 9 Design cross-slope 10 Type of control 11 AUTO indicator 12 Back Grade mode indicator

This is a typical main screen of control box.

**Factory Installed Machine Control System For Quality, Durability**

Machine control system components are factory installed and designed as an integral part of the machine.


# PERFORMANCE FEATURES

## KOMATSU NEW ENGINE TECHNOLOGIES

### Komatsu's New Emission Regulations-compliant Engine

New regulations effective in 2014 require the reduction of NOx emissions. In addition to refining the U.S. EPA Tier 4 Interim technologies, Komatsu developed a new Selective Catalytic Reduction (SCR) device in-house.


- ① Komatsu Diesel Oxidation Catalyst (KDOC)
- ② Variable flow turbocharger
- ③ Komatsu Closed Crankcase Ventilation (KCCV)
- ④ SCR

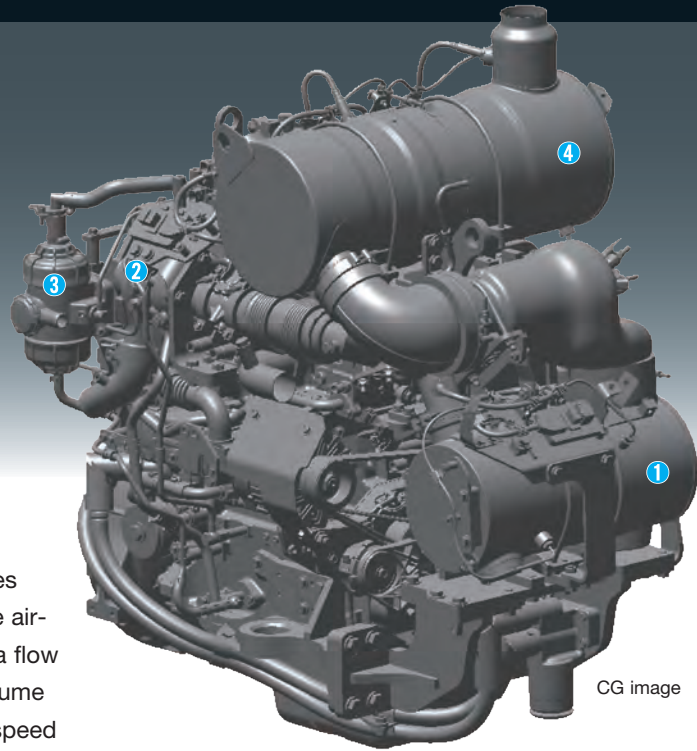

CG image


### Technologies Applied to New Engine Water cooled variable flow turbocharger

A newly designed variable flow turbocharger features simple and reliable technology that varies the intake air flow. Exhaust turbine wheel speed is controlled by a flow control valve that enables delivery of an optimal volume of air to the engine combustion chamber under all speed and load conditions. The result is cleaner exhaust gas while maintaining power and performance.

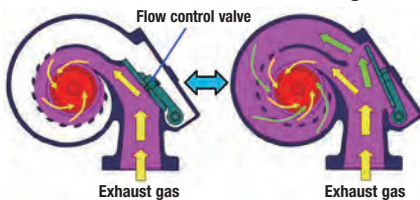


### Heavy-duty aftertreatment system

This new system consists of a KDOC and a SCR. The SCR NOx reduction system injects the correct amount of Diesel Exhaust Fluid (DEF) at the proper rate, thereby decomposing NOx into non-toxic water (H<sub>2</sub>O) and nitrogen gas (N<sub>2</sub>).

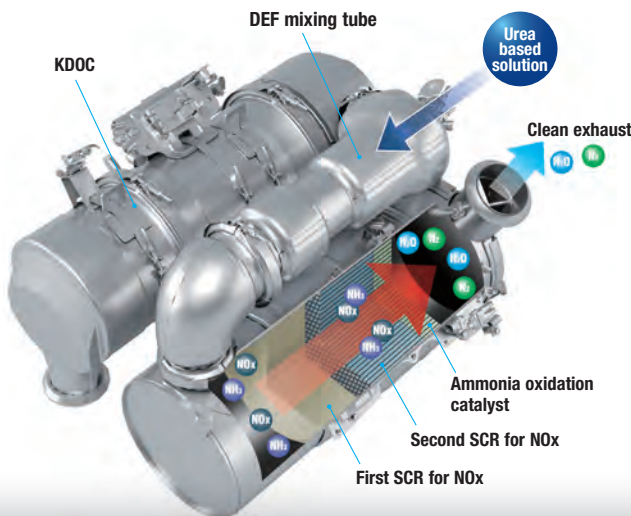

### Cooled Exhaust Gas Recirculation (EGR)

Cooled EGR, a technology well-proven in existing Komatsu engines, reduces NOx emissions. These components ensure reliable performance during the demanding work conditions of construction equipment.

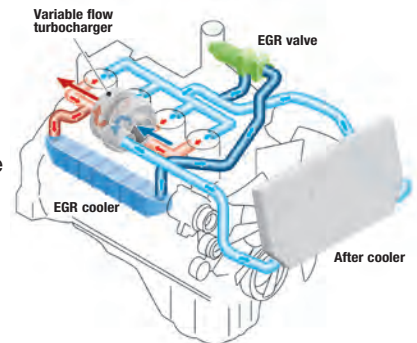

### Komatsu Closed Crankcase Ventilation (KCCV)


Crankcase emissions (Blowby gas) are passed through a KCCV filter. The KCCV filter traps oil mist which is returned back to the crankcase while the gas, which is almost oil mist free, is fed back to the air intake.



D339EXH/PXH-24

### Heavy-duty High Pressure Common Rail (HPCR) fuel injection system

The system is designed to achieve an optimal injection of high-pressure fuel by means of computerized control, thereby bringing close to complete combustion to reduce Particulate Matter (PM) emissions. While this technology is already used in current engines, the new system uses higher-pressure fuel injection, thereby reducing both PM emissions and fuel consumption over the entire engine power range.

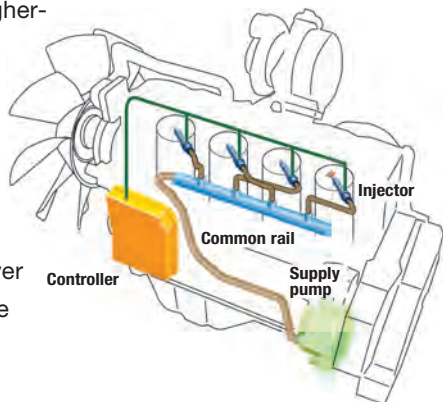

### Advanced electronic control system

The electronic control system performs high-speed processing of all signals from sensors installed in the vehicle and engine. This ensures total control of the equipment under all conditions. Engine condition information is displayed via an on-board network on the monitor inside the cab. Furthermore, KOMTRAX helps customers use this information to keep up with maintenance needs.

### Redesigned combustion chamber at top of piston

The combustion chamber at the top of the piston has a new shape designed to improve combustion and further reduce NOx, PM, fuel consumption and noise.

### Auto Idle Shutdown Function

Komatsu auto idle shutdown automatically shuts the engine down after idling for a set period of time to reduce unnecessary fuel consumption and exhaust emissions. The amount of time before the engine is shutdown can be easily programmed from 5 to 60 minutes.



# PRODUCTIVITY & FUEL ECONOMY FEATURES

## HYDROSTATIC TRANSMISSION (HST) CONTROL SYSTEM

### HST Control System

The HST controller monitors engine output and work load. It controls HST pump and motor displacement to provide the optimum speed and drawbar pull. Full power to both tracks during turns or counter-rotation makes the D39EXi/PXi-24 extremely maneuverable.



### Fuel Efficiency

The efficient HST control system can reduce fuel consumption.

**Fuel consumption reduced by up to 5%**

Compared with D39EXi/PXi-23 in P mode  
Based on typical work pattern collected via KOMTRAX

### Hydraulically Driven Cooling Fan

The engine cooling fan's speed is electronically controlled. Fan speed depends on engine coolant and oil temperatures. The fan will only rotate as fast as is necessary to adequately cool the machine's fluid. This system increases fuel efficiency, reduces operating noise levels and requires less horsepower than a belt-driven fan.

### Selectable Working Mode

P mode is the mode designed for powerful operation and maximum production. E mode is designed for general dozing applications, providing adequate speed and power, while saving energy. For fuel reduction and energy savings, the monitor panel allows the operator to easily switch between working modes, depending on working conditions.

#### **P mode (Power mode)**

With P mode, the engine outputs its full power, allowing the machine to perform work requiring large production, heavy-load, and uphill work.

#### **E mode (Economy mode)**

With E mode, the engine outputs enough power for the work without delivering unnecessary power. This mode enables energy saving operation and is ideal on hard or rough surfaces that often cause shoe slip and work not requiring as much power, such as downhill dozing, leveling and light-load work.



## PAT DOZER

**PAT Dozer with Adjustable Pitch**

A power angle power tilt dozer blade with adjustable blade pitch system is available on the D39EXi/PXi-24. The hydraulic blade tilt and angling function expands versatility and productivity in a variety of applications and manually adjustable blade pitch.

**Unrivaled Blade Visibility**

The D39EXi/PXi-24 incorporates Komatsu's super-slant nose design. Komatsu's innovative design provides excellent blade visibility for improved machine control and increased efficiency and productivity.



# CONTROL FEATURES




## Palm Command Control System (PCCS) Levers

Komatsu's ergonomically designed PCCS handles create an operating environment with complete operator control.

### PCCS

The low-effort PCCS joystick controls all directional movements, including machine travel speed as well as counter-rotation.



## Electronic controlled hydraulic system

Electronic controlled palm commanded joystick provides precise blade control. New blade angling switch operation provides easier and predictable blade control.



## HST with Electronic Control

The D39EXi/PXi-24 is equipped with Komatsu-designed HST that allows for Quick-Shift or variable speed selection. The HST consists of dual-path closed-circuits, with two variable displacement piston pumps and two variable displacement travel motors. Hydrostatic steering eliminates steering clutches and brakes, providing smooth, powerful turns. Fully electronic control provides complete automatic shifting and enables smooth control. Engine speed is controlled using an electronic fuel control dial.

## One-Pedal Design (Decelerator/Brake Pedal) Controls Speed, During Operation

Machine operation is simple because brake function has been integrated into the decelerator pedal. Machine travel speed can be controlled using one pedal. The pedal function can be changed by a mode selector switch.

**Decelerator mode:** The pedal modulates engine rpms and vehicle travel speed. It can be used for all applications.

**Brake mode:** The pedal modulates vehicle travel speed while maintaining high-engine speed. This mode can be helpful to maintain work-equipment speed, while using the brake function.



# WORKING ENVIRONMENT



## Integrated ROPS (ISO 3471) Cab

The D39EXi/PXi-24 has an integrated ROPS (ISO 3471) cab. High rigidity and superb sealing performance sharply reduce noise and vibration for the operator and discourage dust from entering the cab. In addition, side visibility is increased because external ROPS (ISO 3471) structure and posts are not required.



## Comfortable Ride with Heated Operator Seat

The operator seat has adjustable lumbar support, tilt and an electric heater. It is easy to adjust to the operator's shape and comfortable operation is possible in a variety of conditions. Also, the seat heat makes it possible to work comfortably in the winter.



## Comfortable Ride with Cab Damper Mounting

The D39EXi/PXi-24's cab mount uses a cab damper system that provides excellent shock and vibration absorption which conventional mounting systems are unable to match. The silicon-oil-filled cab damper mount helps to isolate the cab from the machine body, suppressing vibration and providing a quiet, comfortable operating environment.

## Auxiliary Input Jack & Two DC12 Volt Electrical Outlets

By connecting an auxiliary device to this plug input, the operator can play audio from a mobile device through the machine's sound system. Two DC12 volt electrical outlets can be used as a power source for radio equipment or others.



Two DC12 V electrical outlets

Auxiliary input jack

## ADDITIONAL OPERATOR CONVENIENCE EQUIPMENT

### Rear view monitor system

On the large LCD color monitor, the operator can view, through one camera, areas directly behind the machine. This camera can be synchronized with reverse operation.



### Secondary engine shutdown switch

A new secondary switch has been added at the side of the front console to shut down the engine.




# RELIABILITY & MAINTENANCE FEATURES

## Excellent Reliability & Durability

### Parallel Link Undercarriage System (PLUS)

Komatsu's PLUS rotating bush design provides less downtime, longer wear, and with up to 40% lower undercarriage maintenance costs. Rotating bushings eliminate the cost and downtime for bushing turns, and strengthened rollers and links increase wear life up to two times. With PLUS, individual links can be replaced with common track tools.

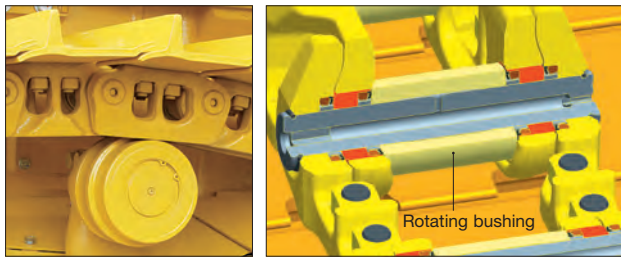


### Modular design

One of the design goals behind the creation of the D39EXi/PXi-24 was to manufacture a more durable machine. This was achieved by reducing component complexity and using a strong modular design for increased serviceability and durability.



### Self-adjusting idler support

The self-adjusting idler support provides constant and even tension on idler guide plates, reducing noise and vibration and increasing undercarriage life.

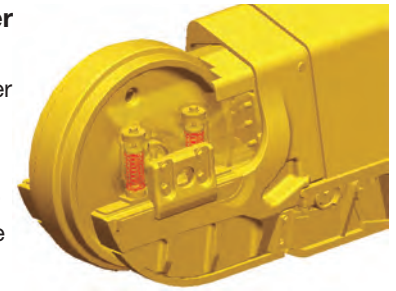

### Easy Maintenance

Planned maintenance and daily checks are the only way to ensure long service life from equipment. That's why Komatsu designed the D39EXi/PXi-24 with conveniently located maintenance points to make necessary inspections and maintenance quick and easy.

### Rear, hydraulically-driven, swing-up fan

The D39EXi/PXi-24 utilizes a swing-up fan with a gas strut-assisted lift system to provide easy access to the (side-by-side) radiator, oil cooler and charge air cooler. The hydraulic fan has a cleaning mode which enables the fan to rotate in the reverse direction to help clear off objects that are restricting air flow.



D39EX-24 Shown

D39EXi/PXi-24

# TECHNOLOGY FEATURES



## Large Multi-Lingual High Resolution LCD Monitor

A large, user-friendly color monitor provides easy-to-understand information for the operator. Excellent screen visibility is achieved with a high resolution LCD monitor that is easy to read at various angles and lighting conditions. Simple and easy-to-operate switches and function keys facilitate multi-function operations. The monitor displays data in 26 languages.



## Multi-monitor with Troubleshooting Function to Minimize Down Time

Various meters, gauges and warning functions are centrally arranged on the multi-monitor. The monitor simplifies start-up inspection and promptly warns the operator with a lamp and buzzer if any abnormalities occur. In addition, warning indicators are displayed in 4 levels to alert the operator of potential issues. Replacement times for required PM services are also indicated.




## Energy Saving Operation

### Ecology guidance

In order to support efficient operation, the following four messages are displayed for fuel saving operation. These can be displayed by the operator, if desired.

- 1) Avoid Excessive Engine Idling
- 2) Use Economy Mode to Save Fuel
- 3) Avoid Hydraulic Relief Pressure
- 4) Avoid Over Load

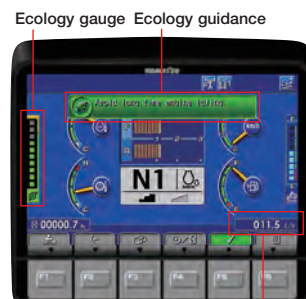

Fuel consumption display

### Ecology gauge

To help the operator to perform in an environmentally friendly way and minimize energy consumption, an easy-to-read “Ecology gauge” is displayed on the left of the multi-monitor screen.


### Fuel consumption display

Average fuel consumption during the day is displayed and updated every 10 seconds.

## Ecological Operation Report for Assistance

KOMTRAX is Komatsu’s remote equipment and fleet monitoring system. Wireless technology and a secure web-based application offer the information needed to make the best possible operation and management decisions. From location, actual hours worked and fuel consumption, to maintenance monitoring, abnormality codes and load frequency, operators receive reports that are simple to read and understand. The new D39EXi/PXi-24 adds the following new information for fuel consumption reduction.

- Guidance to improve fuel consumption
- Ecological operation report.
- Operating hours by operation mode (E or P mode)
- Service information for U.S. EPA Tier 4 Final (regeneration information)

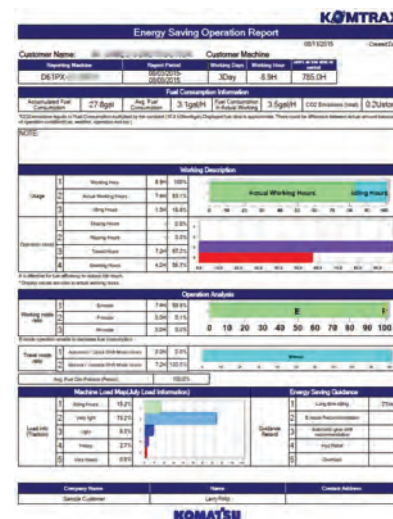

# KOMATSU PARTS & SERVICE SUPPORT



## KOMATSU CARE®

### Program Includes:

\*The D39EXi/PXi-24 comes standard with complimentary factory scheduled maintenance for the first 3 years or 2,000 Hours, whichever comes first.

### Planned Maintenance Intervals at:

500/1000/1500/2000 hour intervals. (250 hr. initial interval for some products) Complimentary Maintenance Interval includes: Replacement of Oils & Fluid Filters with genuine Komatsu Parts, 50-Point inspection, Komatsu Oil & Wear Analysis Sampling (KOWA) / Travel & Mileage (distance set by distributor; additional charges may apply) Komatsu CARE services are available from every Komatsu Distributor in the U.S. and Canada.

### Benefits of Using Komatsu CARE

- Assurance of Proper Maintenance with OEM Parts & Service
- Increased Uptime & Efficiency
- Factory Certified Technicians Performing Work
- Cost of Ownership Savings
- Transferable Upon Resale

### Complimentary SCR System Maintenance

The D39EXi/PXi-24 also includes 2 factory recommended services of the Selective Catalytic Reduction (SCR) Diesel exhaust fluid (DEF) system during the first 5 years—no hour limit including:

- Factory recommended DEF tank flush and strainer cleaning at 4,500 hours and 9,000 hours

### Komatsu CARE® – Advantage Extended Coverage

- Extended Coverage can provide peace of mind by protecting customers from unplanned expenses that effect cash flow
- Purchasing extended coverage locks-in the cost of covered parts and labor for the coverage period and helps turn these into fixed costs



\* Some exclusions apply. Please contact your Komatsu distributor for specific program details.



### Komatsu Parts Support

- 24/7/365 to fulfill your parts needs
- 9 parts Distribution Centers strategically located across the U.S. and Canada
- Distributor network of more than 300 locations across U.S. and Canada to serve you
- Online part ordering through Komatsu eParts
- Remanufactured components with same-as-new warranties at a significant cost reduction



### Komatsu Oil and Wear Analysis (KOWA)

- KOWA detects fuel dilution, coolant leaks, and measures wear metals
- Proactively maintain your equipment
- Maximize availability and performance
- Can identify potential problems before they lead to major repairs
- Reduce life cycle cost by extending component life

D39EXi/PXi-24

# KOMTRAX EQUIPMENT MONITORING

**intelligent**  
MACHINE CONTROL

GET THE WHOLE STORY WITH  
**KOMTRAX**<sup>®</sup>

## ✓ WHAT

- KOMTRAX is Komatsu's remote equipment monitoring and management system
- KOMTRAX **continuously monitors and records** machine health and operational data
- Information such as fuel consumption, utilization, and a detailed history **lowering owning and operating cost**
- KOMTRAX is **standard** equipment on all Komatsu construction products

## ✓ WHEN

- Know when your machines are **running or idling** and make decisions that will improve your fleet utilization
- Detailed movement records ensure you know when and where your equipment is moved
- Up to date records allow you to **know when maintenance is due** and help you plan for future maintenance needs

## ✓ WHERE

- KOMTRAX data **can be accessed virtually anywhere** through your computer, the web or your smart phone
- Automatic alerts keep fleet managers up to date on the latest machine notifications

## ✓ WHY

- Knowledge is power - **make informed decisions** to manage your fleet better
- Knowing your idle time and fuel consumption will help maximize your machine efficiency
- **Take control of your equipment** - any time, anywhere



**KOMTRAX**<sup>®</sup>

For construction and compact equipment.

**KOMTRAX Plus**<sup>®</sup>

For production and mining class machines.

# SPECIFICATIONS



## ENGINE

Model..... Komatsu SAA4D95LE-7\*  
 Type.....4-cycle, watercooled, direct injection  
 Aspiration..... Variable flow, turbocharged, air-to-air aftercooled  
 Number of cylinders..... 4  
 Bore x stroke..... 95 mm x 115 mm **3.75" x 4.52"**  
 Piston displacement..... 3.26 ltr **199 in<sup>3</sup>**  
 Governor..... All-speed, electronic  
 Horsepower  
   SAE J1995.....Gross 79 kW **107 HP**  
   ISO 9249 / SAE J1349.....Net 78 kW **105 HP**  
 Rated rpm..... 2200 rpm  
 Fan drive type.....Hydraulic  
 Lubrication system  
   Method..... Gear pump, force lubrication  
   Filter..... Full-flow

\*EPA Tier 4 Final emissions certified



## HYDROSTATIC TRANSMISSION


Dual-path, hydrostatic transmission provides infinite speed changes up to 5.3 km/h **8.5 mph**. The variable capacity travel motors allow the operator to select the optimum speed to match specific jobs. Travel control lock lever and neutral switch.

Travel speed (quick shift mode)*	Forward	Reverse
<b>1st</b>	0-3.4 km/h <b>0-2.1 mph</b>	0-4.1 km/h <b>0-2.5 mph</b>
<b>2nd</b>	0-5.6 km/h <b>0-3.5 mph</b>	0-6.5 km/h <b>0-4.0 mph</b>
<b>3rd</b>	0-8.5 km/h <b>0-5.3 mph</b>	0-8.5 km/h <b>0-5.3 mph</b>

Travel speed (variable mode)	Forward	Reverse
	0-8.5 km/h <b>0-5.3 mph</b>	0-8.5 km/h <b>0-5.3 mph</b>

\*Quick shift speeds are adjustable in the monitor.

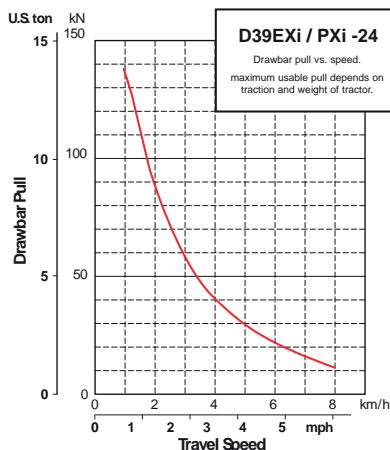

## FINAL DRIVES

In-shoe mounted, axial-piston-type travel motors, with integrated two-stage planetary gear reduction. Compact in-shoe mount reduces risk of damage by debris. Bolt-on sprocket ring with triple labyrinth seal design.



## STEERING SYSTEM

Palm Command Control System (PCCS) joystick control for all directional movements. Pushing the joystick forward results in forward machine travel, while pulling it rearward reverses the machine. Simply tilt the joystick to the left or right to make a turn. Tilting the joystick fully to the left or right activates counter-rotation.

Hydrostatic Transmission (HST) provides smooth powerful turns. Fully electronic control enables smooth control that can be adjusted in the monitor. The PCCS utilizes shift buttons to increase and decrease speed.

Minimum turning radius\*

D39EXi-24..... 2.2 m **87"**  
 D39PXi-24..... 2.4 m **94"**

\*As measured by track marks on the ground at pivot turn.



## UNDERCARRIAGE

Suspension..... Rigid type  
 Track roller frame .... Monocoque, large section, durable construction  
 Rollers & idlers ..... Lubricated track rollers

Sealed & lubricated track...Track tension easily adjusted w/grease gun

	D39EXi-24	D39PXi-24 Narrow	D39PXi-24 Wide
Number of track rollers (each side)	6	7	7
Type of shoes (standard)	Single grouser	Single grouser	Single grouser
Number of shoes (each side)	39	39	39
Grouser height	mm <b>in</b> 47 <b>1.9"</b>	47 <b>1.9"</b>	47 <b>1.9"</b>
Shoe width (standard)	mm <b>in</b> 510 <b>20"</b>	635 <b>25"</b>	700 <b>27.5"</b>
Ground contact area	cm <sup>2</sup>	23919	29782
	<b>in<sup>2</sup></b>	<b>3,707</b>	<b>4,616</b>
Ground pressure (with dozer, ROPS cab)	kPa	40.2	34.6
	kgf/cm <sup>2</sup>	0.41	0.35
	<b>psi</b>	<b>5.8</b>	<b>5.0</b>
Track gauge	mm <b>ft.in</b> 1620 <b>5'4"</b>	1810 <b>5'11"</b>	1810 <b>5'11"</b>
Length of track on ground	mm <b>ft.in</b> 2345 <b>7'8"</b>	2345 <b>7'8"</b>	2345 <b>7'8"</b>



## SERVICE REFILL CAPACITIES

Coolant ..... 34 ltr **9.0 U.S. gal**  
 Fuel tank ..... 190 ltr **50.2 U.S. gal**  
 Engine oil ..... 11 ltr **2.9 U.S. gal**  
 Hydraulic tank ..... 60 ltr **15.8 U.S. gal**  
 Final drive (each side)..... 3.5 ltr **0.9 U.S. gal**  
 Diesel Exhaust Fluid (DEF) tank ..... 15.4 ltr **4.1 U.S. gal**



## OPERATING WEIGHT (APPROXIMATE)

Tractor weight:

Including ROPS cab, U frame for power angle tilt dozer, rated capacity of lubricant, coolant, full fuel tank, operator, and standard equipment.

D39EXi-24 ..... 8320 kg **18,342 lb**  
 D39PXi-24 ..... 9270 kg **20,437 lb**

Operating weight:

Including Power Angle Tilt dozer, ROPS cab, operator, standard equipment, rated capacity of lubricant, hydraulic control unit, coolant, and full fuel tank.

D39EXi-24 ..... 9910 kg **21,848 lb**  
 D39PXi-24 ..... 10500 kg **23,148 lb**






**DIMENSIONS**

	D39EXi-24		D39PXi-24	
A	2710 mm	<b>8'11"</b>	3250 mm	<b>10'8"</b>
B	365 mm	<b>1'2"</b>	440 mm	<b>1'5"</b>
C	980 mm	<b>3'3"</b>	910 mm	<b>3'</b>
C'	1120 mm	<b>3'8"</b>	1105 mm	<b>3'7"</b>
D	820 mm	<b>2'8"</b>	820 mm	<b>2'8"</b>
E	440 mm	<b>1'5"</b>	440 mm	<b>1'5"</b>
F	2345 mm	<b>7'8"</b>	2345 mm	<b>7'8"</b>
G	4385 mm	<b>14'5"</b>	4385 mm	<b>14'5"</b>
H	3010 mm	<b>9'11"</b>	2850 mm	<b>9'4"</b>
I	47 mm	<b>1.9"</b>	47 mm	<b>1.9"</b>
J	1620 mm	<b>5'4"</b>	1810 mm	<b>5'11"</b>
K	460 mm	<b>1'6"</b>	635 mm	<b>2'1"</b>
L	2080 mm	<b>6'10"</b>	2445 mm	<b>8'2"</b>
M	2495 mm	<b>8'2"</b>	2990 mm	<b>9'10"</b>
N	4910 mm	<b>16'1"</b>	5020 mm	<b>16'6"</b>
O	2475 mm	<b>8'1"</b>	2940 mm	<b>9'8"</b>

Ground clearance ..... 390 mm **15"**

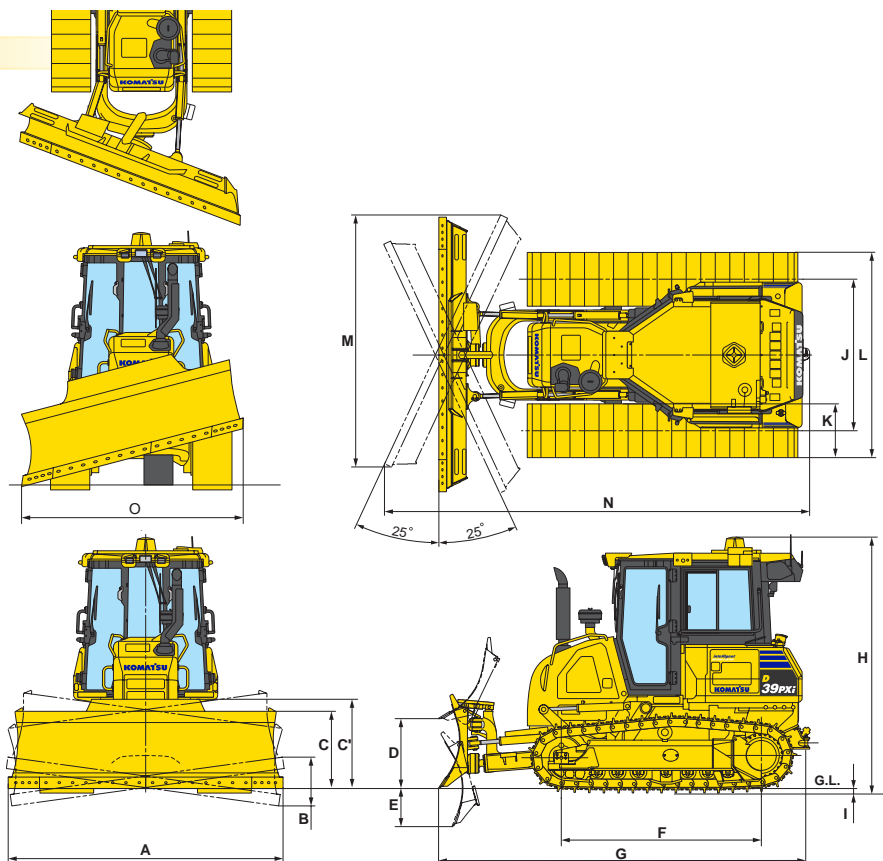

**HYDRAULIC SYSTEM**

Closed-Center Load Sensing System (CLSS) designed for precise and responsive control, and for efficient simultaneous operation.

Hydraulic control unit:

All spool control valves externally mounted remote to the hydraulic tank. Piston-type hydraulic pump with capacity (discharge flow) of 99 ltr/min **26.2 U.S. gal/min** at rated engine rpm.

Relief valve setting ..... 27.4 MPa 280 kg/cm<sup>2</sup> **3,974 psi**

Hydraulic cylinders..... Double-acting, piston type

	Number of cylinders	Bore
Blade lift	2	75 mm <b>3"</b>
Blade tilt	1	90 mm <b>3.5"</b>
Blade angle	2	80 mm <b>3.2"</b>

Hydraulic oil capacity (refill):

Power angle tilt dozer ..... 64 ltr **17 U.S. gal**

Control valves:

3-spool control valve for Power Angle Tilt dozer

Positions:

Blade lift ..... Raise, hold, lower, and float

Blade tilt ..... Right, hold, and left

Blade angle ..... Right, hold, and left

Additional control valve required for ripper

Positions:

Ripper lift..... Raise, hold, and lower



**DOZER EQUIPMENT**

	Overall Length With Dozer <sup>a</sup> mm ft.in	Blade Capacity m <sup>3</sup> yd <sup>3</sup>	Blade Width x Height mm ft.in	Max. Lift Above Ground mm ft.in	Max. Drop Below Ground mm ft.in	Max. Tilt Adjustment mm ft.in	Blade Angle
<b>D39EXi-24</b>	4385 mm	2.21 m <sup>3</sup>	2710 mm x 980 mm	820 mm	440 mm	385 mm	25°
Standard Blade	<b>14'5"</b>	<b>2.89 yd<sup>3</sup></b>	<b>8'11" x 3'3"</b>	<b>2'8"</b>	<b>1'5"</b>	<b>1'3"</b>	25°
<b>D39PXi-24</b>	4385 mm	2.40 m <sup>3</sup>	3250 mm x 910 mm	820 mm	440 mm	440 mm	25°
Standard Blade	<b>14'5"</b>	<b>3.14 yd<sup>3</sup></b>	<b>10'8" x 3'</b>	<b>2'8"</b>	<b>1'5"</b>	<b>1'5"</b>	25°
<b>D39PXi-24</b>	4385 mm	2.22 m <sup>3</sup>	2980 mm x 910 mm	820 mm	440 mm	405 mm	25°
Narrow Blade	<b>14'5"</b>	<b>2.90 yd<sup>3</sup></b>	<b>9'9" x 3'</b>	<b>2'8"</b>	<b>1'5"</b>	<b>1'4"</b>	25°

Blade capacities are based on the SAE recommended practice J1265. Use of high-tensile-strength steel in moldboard for strengthened blade construction.

\* Including hitch



## STANDARD EQUIPMENT FOR BASE MACHINE\*

- Accumulator for Electric Proportional Control (EPC)
- Air cleaner, dry, double element type with caution lamp on monitor
- Air conditioner (A/C)
- Air inlet
- Alternator, 24 V/85 A
- Back-up alarm
- Batteries, large capacity 24 V/92 Ah
- Cab accessories
  - 12 V x 2 power supply
  - Cup holder
  - Rear view mirror
  - Rear view monitor system
- Crankcase guard and underguard
- Decelerator/brake pedal (Single pedal)
- Electronically controlled Hydrostatic Transmission (HST) with quick-shift and variable speed settings
- Electronic monitor panel with on-board diagnostics
- Engine hood and side panels
- Engine, KOMATSU SAA4D95LE-7, gross output of 80 kW **107 HP**, direct injection, water-cooled turbocharged, air-to-air aftercooler, cooled EGR, EPA Tier 4 Final and EU Stage 4 emissions certified
- Fan, hydraulic driven, electronic control
- Filler cap locks and cover locks
- Foot rest, high mounted
- Fuel pre-filter (10 micron) and fuel filter (2 micron)
- Grease gun holder
- High altitude arrangement (No fuel adjustment up to 2300 m)
- Horn
- Hydraulics for PAT dozer
- Intake pipe with precleaner
- Large high-resolution LCD
- Lunch box holder
- Marks and plates, English
- New Operator Identification System
- Palm Command Control System (PCCS) with electronic control for travel control
- Palm Command Control System (PCCS) with EPC for blade control
- Power turn with counter rotation
- Pullhook, front
- Radiator guard grid
- Radiator reserve tank
- Real-time DEF monitoring
- Rear-hinged radiator guard
- Reverse travel speed presets
- ROPS cab
  - Meets ISO 3471, SAE J/ISO 3471 ROPS standards, and ISO 3449 FOPS standard.
- Seat belt, 76 mm **3"** retractable
- Seat, air suspension, fabric, heated, low back, headrest
- Shovel holder
- Starting motor, 24 V/4.5 kW
- Self adjusting roller
- Sprockets, bolt-on
- Sprocket inner guard
- Track roller guards, end section
- Track shoe assembly (PLUS)
  - Heavy-Duty lubricated rotary bushing D39EXi-24: 510 mm **20"** single grouser shoe
  - D39PXi-24: 635 mm **25"** single grouser shoe
- Triple labyrinth final drive
- Water separator
- Worklamp (Front 3, rear 2)

Dozer assembly and rear-mounted equipment are not included in base machine price.



## OPTIONAL EQUIPMENT

- Dozer assembly
- Hitch
- Hydraulics for rear equipment
- Track roller guard, full length

### Multi-shank ripper (for D39EXi only)


Weight.....	470 kg	<b>1,036 lb</b>
Beam length.....	1569 mm	<b>62"</b>
Maximum lift above ground.....	389 mm	<b>15"</b>
Maximum digging depth.....	336 mm	<b>13"</b>
Number of shanks.....	3	

- 700 mm **27.5"** single grouser (PX)(PLUS)



## ALLIED MANUFACTURER'S ATTACHMENTS (SHIPPED LOOSE)

- Guarding - Komatsu (Ken Garner)
  - Front sweeps 229 kg **584 lb**
  - Hinged cab side screens 44 kg **97 lb**
  - Hinged cab rear screen 43 kg **95 lb**
- Hydraulic winch - Allied H4AT 685 kg **1,510 lb**
- Fairlead, four roller
- Drawbar
- Arch, four roller



# KOMATSU®

*Note: All comparisons and claims of improved performance made herein are made with respect to the prior Komatsu model unless otherwise specifically stated.*