




EL6-5
EL8-5

STANDART FEATURES

- Proportional control
- Emergency stop button
- Cylinder holding valve
- Non-marking tyre
- Automatic pothole protection
- Onboard diagnostic system (platform and ground)
- Emergency lowering system
- Platform extention
- Horn
- Lifting with forklift and crane
- Charger protection
- All motion alarm
- Maintenance bar
- Hour meter
- Flashing beacon
- Integrated tilt sensor with alarm
- Pressure sensor

ADVANTAGES

- Rigid structured and unique design
- Easy parts replacement
- Safe driving at full height
- High maneuverability through compact dimensions
- 220 V power outlet and cable on platform
- CAN communication protocol
- CE-EN280 certificate

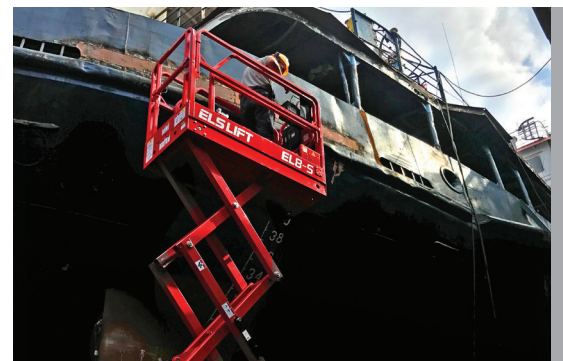

DIMENSIONS

	EL6-S	EL8-S
Working Height	6 m	7.75 m
A Platform Height	4 m	5.75 m
B Stoved Height (Platform)	0,95 m	1.07 m
C Stoved Height (Guardrails)	2.07 m	2.17 m
D Transport Height	1.60 m	1.70 m
E Ground Clearance-With Pothole Guards Deployed	0,02 m	0,02 m
F Ground Clearance-Center	0,11 m	0,11 m
G Width	0,76 m	0,76 m
H Wheelbase	1.37 m	1.37 m
I Length	1.68 m	1.68 m
J Length With Access Steps	1.83 m	1.83 m
K Platform Width	0,77 m	0,77 m
L Platform Length	1.69 m	1.69 m
M Platform Extension	0,87 m	0,87 m

TECHNICAL SPECIFICATIONS

Distributed Capacity of Main Platform	250 kg	230 kg
Distributed Capacity of Extension	115 kg	120 kg
Gradeability	%25	%25
Lift-Lower Time	28 x 28 sec	28 x 28 sec
Non Marking Tyres	Solid 12,5 x 4,25	Solid 12,5 x 4,25
Hydraulic Tank	15 L	15 L
Electric Motor and Hydraulic Pump	24 V / 4,5 kW / 3,8 cc	24 V / 4,5 kW / 3,8 cc
Batteries	4 x 6 V - 240 Ah	4 x 6 V - 240 Ah
Battery Charger	24 V / 30 A	24 V / 30 A
Weight	1480 kg	1560 kg

