


Specification sheet

FAG CF75

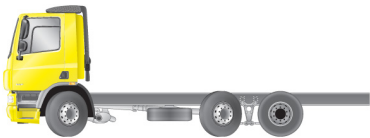

072F7567DBAA - 201949c - 29-08-2019

ENGINES
CF75 250
CF75 250
CF75 310
CF75 310
CF75 360

GVM ¹⁾	GCM ²⁾
24000 kg	38000 kg
Max. front 7500 kg	
Max. rear 16500 kg	

Ukraine, Truck Centre Ltd, www.daf.com

CAB EXTERIOR

Mechanically suspended Day Cab with steel bumper, tinted glass and electric window openers. Main mirrors and wide angle mirrors electrically heated. Cab width 2300 mm.; Manually adjustable main mirrors; No front view mirror.

Optional

- | | |
|---------------------------------------|---|
| 02106 Sleeper Cab | 06592 Four spot lights on the cab roof |
| 01137 Space Cab | |
| 01226 Cab suspension air | 06593 Skylights |
| 00396 Permanent driving lights | 06591 Two spot lights on the cab roof |

COLOURS

Cab colour H3279 Brilliant White; Head lamp panel, bumper and step cover: grey; Chassis colour grey..

Optional

- | | |
|---|---|
| 09932 Head lamp panel, bumper and step cover: Br White | 16153 Cab and chassis colours and step cover: Br White |
| 09931 Head lamp panel, bumper and step cover: cab colour | |

CAB INTERIOR

Driver seat: Comfort Air; Co-driver seat: basic; No air conditioning; Roof hatch glass, manual control.

Optional

- | | |
|--|---|
| 06111 Dashboard: wood structure | 06539 Refrigerator |
| 02117 Third seat | 06599 Auxiliary cab heater (air) |

COMMUNICATION AND DRIVING MANAGEMENT

No Fleet Management System; Tachograph mechanical; Speed limiter setting 85 km/h nominal; Antennas: AM/FM, 2x GSM, GPS; Cruise control.

Optional

- | | |
|---|---|
| 16155 Audio equipment, makes and types | 09909 Adaptive Cruise Control (ACC) with FCW |
|---|---|

SAFETY AND SECURITY

No vehicle stability control; Basic engine immobiliser system.

Optional

- | |
|--|
| 09992 Lane Departure Warning System |
|--|

SUSPENSION AND AXLES

Front: 7.50 t, parabolic, 152N; Rear: 11.50 + 7.50 t, air suspension, SR1347.

Optional

- | | |
|-------------------------------|--|
| 04057 Rear axle HR1356 | 00833 Rear axle load 12.05+7.45 t |
| 01800 Rear axle SR1344 | |

WHEELS AND TYRES

Front axle 1: 295/80R22.5; Rear axle 1: 295/80R22.5; No spare tyre; Disc wheels steel, silvergrey; Wheel protection rings silvergrey.

Optional

- | |
|-----------------------------------|
| 16152 Tyre makes and types |
|-----------------------------------|

DRIVELINE

PR183, 183 kW/249 hp, 45C HD. Cab badge: 250; Exhaust emission Euro 3; No engine idle shutdown; Manual gearbox, 9 speeds; Gearbox ratio 9.48-0.75; Rear axle ratio 5.63; Mechanical differential lock.

Optional

- | | |
|---|-----------------------------------|
| 04001 Exhaust emission Euro 5 | 02313 Gearbox direct drive |
| 04500 AS Tronic gearbox, 12 speeds | 03721 ASR |

BRAKE SYSTEM

ABS.

Optional

- | |
|--------------------------|
| 02715 ZF Intarder |
|--------------------------|

CHASSIS

Wheelbase 4.30 m / rear overhang 0.92 m; Side member height 310 mm; Steel fuel tank 300 l, height 580 mm; Spray suppression; No front underrun protection; No AdBlue tank; No spare wheel carrier.

Optional

- | | |
|---|------------------------------------|
| 16157 Fuel tanks, material and sizes | 13485 AdBlue tank 45 litres |
|---|------------------------------------|

DRAWBAR AND TRAILER EQUIPMENT

D-value cross member D=13.7.

Optional

- | |
|-----------------------------|
| 04624 Closing member |
|-----------------------------|

BODIES AND PREPARATIONS FOR BODYING

Application connector on the cab front.

Optional

- | | |
|--|---|
| 04331 Appl connector including air control prep | 09240 Application connector for refuse collector |
| 06692 Application connector on the chassis | |

ELECTRICAL POWER SUPPLY

Alternator 80 A, batteries 2x 140 Ah..

Optional

- | | |
|-------------------------------|--------------------------------|
| 04873 Alternator 110 A | 08797 Batteries 2x175Ah |
|-------------------------------|--------------------------------|

GVM AND GCM

Chassis weight related technical GVM max 26500 kg; Driveline related max GCM 38000 kg class 2.

APPLICATION CONDITIONS

Moisture separator, heated; Cyclonic air intake behind the cab.

Optional

- | |
|-------------|
| 0227 |
|-------------|


SEF

Stand
drive



Go to **DAF.com** to configure your own perfect DAF.

FAG CF75

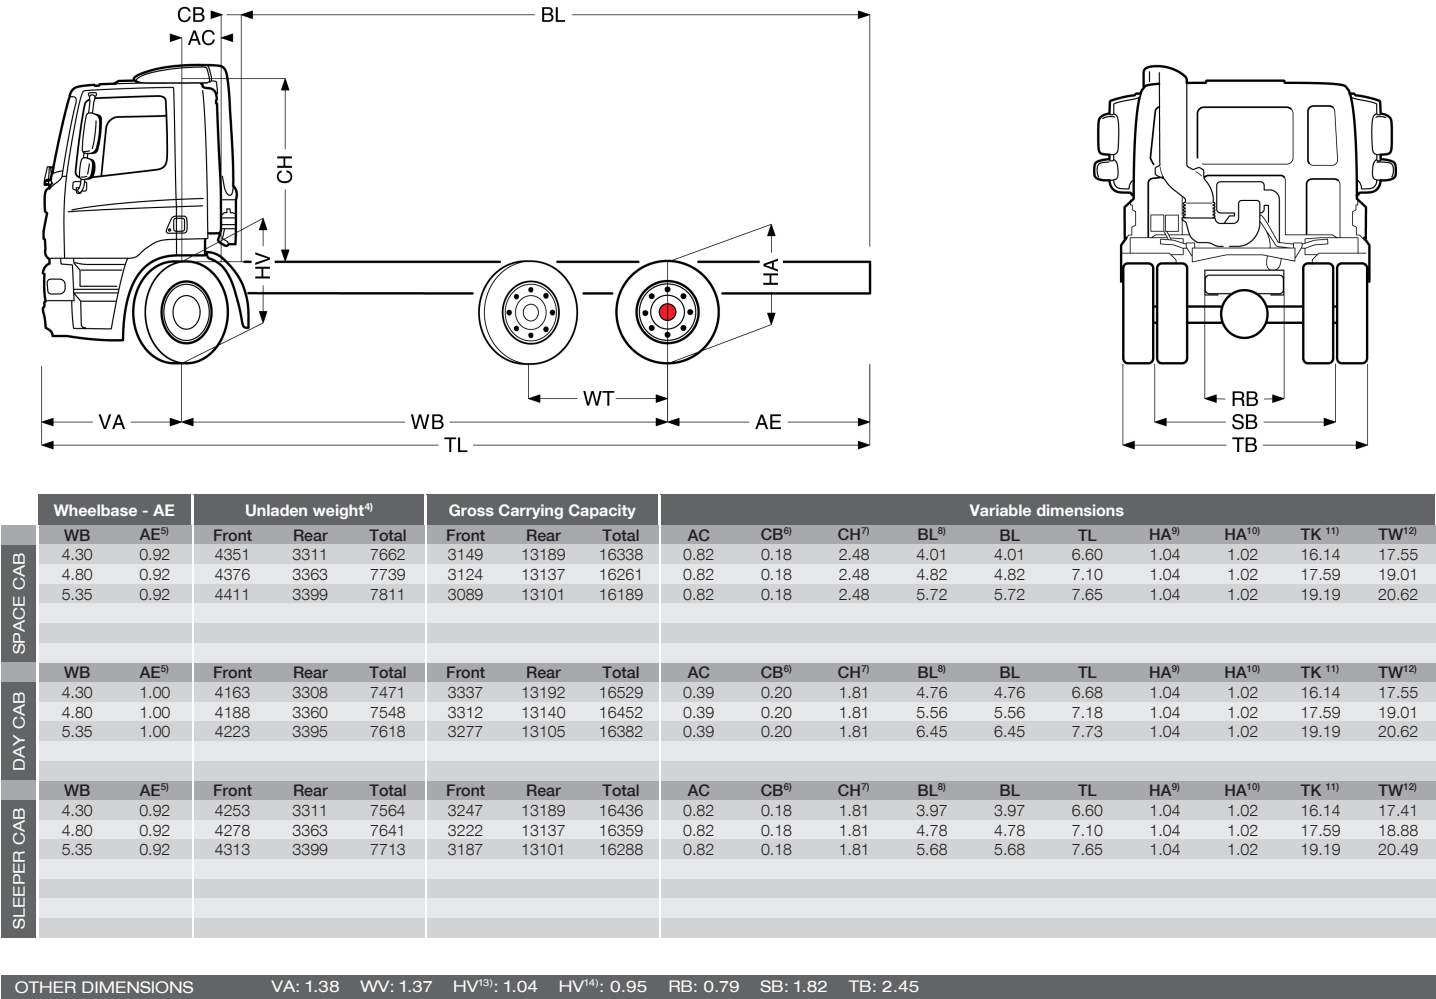

1) GVM in conformity with registration documents.
2) GCM in conformity with registration documents.
3) Axle load with standard tyre size.
4) Chassis and cab weight calculated with: Standard specification items only with 300 litres of fuel, 0 litres of AdBlue and driver of 80 kg, tolerance $\pm 3\%$. Changing of the specification can have major impact on vehicle weight.
5) Other AE dimensions may be available for shown WB. Modify rear overhang to the calculated body length.
6) CB is based on standard air intake and/or exhaust.
7) Cab height is measured from frame member to closed cabin roof hatch. With air intake on cab roof: +0.14 m.

8) Calculate customer specific body length with TOPEC. Body lengths shown based on evenly distributed load at max axle load.
9) Unladen height at centre of driven axle (leading axle down).
10) Laden height at centre of driven axle(s).
11) TK = turning circle between kerbs.
12) TW = turning circle between walls.
13) Unladen height at centre of front axle(s).
14) Laden height at centre of front axle(s).

Depending on the vehicle configuration a specific option may not be possible. The availability and specification of this vehicle may differ per country. For further information please contact the DAF organisation. Pictures and technical illustrations are not binding in detail and can differ from the standard specification. Subject to modification without prior notice.