

Specification sheet

FTT CF85



090G8549AAAA - 201949c - 29-08-2019

ENGINES
CF85 360
CF85 360
CF85 410
CF85 410
CF85 460
CF85 460

GVM ¹⁾	GCM ²⁾
26000 kg	44000 kg
Max. front 7500 kg	
Max. rear 19000 kg	

Serbia, Braća Crnomarković doo, www.daf.com

CAB EXTERIOR

Mechanically suspended Sleeper Cab with steel bumper, tinted glass and electric window openers. Main mirrors and wide angle mirrors electrically heated. Cab width 2300 mm.; Electrically adjustable mirrors; Front view mirror.

Optional

- | | |
|--|---|
| 01899 Day Cab | 06166 Combi lights in bumper |
| 01137 Space Cab | 07313 Combi lights led in bumper |
| 01226 Cab suspension air | 06592 Four spot lights on the cab roof |
| 08071 Xenon head lights with washer | 06593 Skylights |
| 00396 Permanent driving lights | 06591 Two spot lights on the cab roof |

AERODYNAMICS

Optional

- 04906** Side collars

COLOURS

Cab colour H3279 Brilliant White; Head lamp panel, bumper and step cover: Br White; Chassis colour grey..

Optional

- | | |
|---|--|
| 09931 Head lamp panel, bumper and step cover: cab colour | 04198 Mirror covers in cab colour |
| 09930 Head lamp panel, bumper and step cover: grey | 16153 Cab and chassis colours |

CAB INTERIOR

Driver seat: Comfort Air; Co-driver seat: basic; Storage box on engine tunnel; Lower bunk, normal level; No air conditioning; No auxiliary cab heater; Roof hatch aluminium, manual control.

Optional

- | | |
|--|---|
| 09271 Steering wheel, leather, colour black | 04186 Upper bunk |
| 06111 Dashboard: wood structure | 06599 Auxiliary cab heater (air) |
| 06539 Refrigerator | 06516 Auxiliary cab heater (water) |
| 31365 Without feature: Upper bunk | |

COMMUNICATION AND DRIVING MANAGEMENT

FMS connector prepared; Tachograph digital, VDO; Speed limiter setting 85 km/h absolute; Antennas: AM/FM, 2x GSM, GPS; Cruise control.

Optional

- | | |
|---|---|
| 09681 Preparation for Maut | 09721 Handsfree telephone kit |
| 16155 Audio equipment, makes and types | 09909 Adaptive Cruise Control (ACC) with FCW |

SAFETY AND SECURITY

No vehicle stability control; Basic engine immobiliser system.

Optional

- | | |
|--|------------------------------|
| 08631 Air bag (driver) and 2 seat belt tensioners | 01725 Reverse warning |
| 09992 Lane Departure Warning System | |

SUSPENSION AND AXLES

Front: 7.50 t, parabolic, 152N; Rear: 2x 10.50 t, air suspension, SR1360T.

Optional

- | | |
|---|-------------------------------------|
| 06257 Front axle load 9.00 t | 01601 Rear springs trapezium |
| 07494 Rear axle HR1670T | 08191 Axle load monitoring |
| 04563 Rear axle load 13.00+13.00 t | |

WHEELS AND TYRES

Front axle 1: 295/80R22.5; Rear axle 1: 295/80R22.5; No spare tyre; Disc wheels steel, silvergrey; Wheel protection rings silvergrey.

Optional

- 16152** Tyre makes and types

DRIVELINE

MX265, 265 kW/360 hp, 38C. Cab badge: 360; Exhaust emission Euro 5; Manual gearbox, 16 speeds; Gearbox ratio 13.80-0.84; Rear axle ratio 3.78; Mechanical differential lock; ASR.

Optional

- | | |
|---|---|
| 03020 Exhaust emission Euro 5/EEV | 04503 AS Tronic gearbox, 16 speeds |
| 04500 AS Tronic gearbox, 12 speeds | 02313 Gearbox direct drive |

BRAKE SYSTEM

Exhaust brake; ABS.

Optional

- | | |
|------------------------------|--------------------------|
| 09921 MX Engine Brake | 02715 ZF Intarder |
|------------------------------|--------------------------|

CHASSIS

Wheelbase 3.90 m / rear overhang 1.65 m; Side member height 310 mm; Exhaust discharge to the left-hand side; Aluminium fuel tank 430 l, height 620 mm; Worklamp white; Spray suppression; Front underrun protection (FUP); Catwalk with step; AdBlue tank 50 litres; No spare wheel carrier.

Optional

- 16157** Fuel tanks, material and sizes

DRAWBAR AND TRAILER EQUIPMENT

No fifth wheel; Pneumatic trailer connection palm type; Electric connection 24 V / 2x7 pins.

Optional

- 03178** Towing hook D= 4.3

POWER TAKE-OFF (PTO)

Optional

- 16148** PTO types and positions

ELECTRICAL POWER SUPPLY

Alternator 80 A, batteries 2x 175 Ah..

Optional

- | | |
|--------------------------------|--------------------------------|
| 04873 Alternator 110 A | 06440 Batteries 2x230Ah |
| 01257 Batteries 2x140Ah | |

GVM AND GCM

Chassis weight related technical GVM max 27000 kg; Driveline related max GCM 61000 kg.

Optional

- | | |
|---|---|
| 00778 Driveline related max GCM 58000 kg class 2 | 02926 Driveline related max GCM 70000 kg |
| 00818 Driveline related max GCM 60000 kg class 3 | |

APPLICATION CONDITIONS

Moisture separator, unheated; Air intake on the cab roof.

Optional

- | | |
|---------------------------|---|
| 02270 Cold climate | 09961 Cyclonic air intake behind the cab |
|---------------------------|---|

SERVICE AND MAINTENANCE

Standard Warranty takes care of 1 year complete vehicle, 2nd year driveline and 1st year breakdown.; ITS service.



Optional

- 08311** Service interval extended



Go to [DAF.com](https://www.daf.com) to configure your own perfect DAF.

FTT CF85

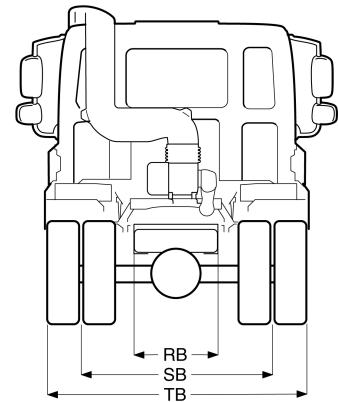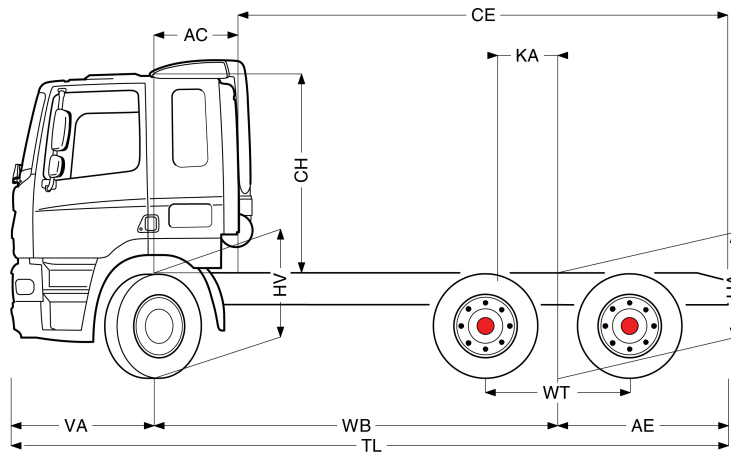

	Wheelbase - AE		Unladen weight ⁹⁾			Gross Carrying Capacity			Variable dimensions									
	WB	AE ⁵⁾	Front	Rear	Total	Front	Rear	Total	AC	CE	CH ⁶⁾	KA ⁷⁾	TL	HA ⁸⁾	HA ⁹⁾	TK ¹⁰⁾	TW ¹¹⁾	
SPACE CAB	3.90	1.65	4969	3747	8716	2531	15253	17284	0.82	4.73	2.58	0.00	6.93	1.05	1.03	13.68	15.05	
DAY CAB	3.90	1.65	4778	3747	8525	2722	15253	17475	0.39	5.16	1.91	0.00	6.93	1.05	1.03	13.68	15.05	
SLEEPER CAB	3.90	1.65	4869	3747	8616	2631	15253	17384	0.82	4.73	1.91	0.00	6.93	1.05	1.03	13.68	15.05	

OTHER DIMENSIONS	VA: 1.38	WT: 1.40	HV ¹²⁾ : 1.02	HV ¹³⁾ : 0.96	RB: 0.79	SB: 1.82	TB: 2.45
------------------	----------	----------	--------------------------	--------------------------	----------	----------	----------

- 1) GVM in conformity with registration documents.
- 2) GCM in conformity with registration documents.
- 3) Axle load with standard tyre size.
- 4) Chassis and cab weight calculated with: Standard specification items only with 430 litres of fuel, 50 litres of AdBlue and driver of 80 kg, tolerance $\pm 3\%$. Changing of the specification can have major impact on vehicle weight.
- 5) Other AE dimensions may be available for shown WB.
- 6) Cab height is measured from frame member to closed cabin roof hatch. With air intake on cab roof: +0.14 m.

- 7) Calculate customer specific KA with TOPEC.
- 8) Unladen height at centre of driven axle(s).
- 9) Laden height at centre of driven axle(s).
- 10) TK = turning circle between kerbs.
- 11) TW = turning circle between walls.
- 12) Unladen height at centre of front axle(s).
- 13) Laden height at centre of front axle(s).

Depending on the vehicle configuration a specific option may not be possible. The availability and specification of this vehicle may differ per country. For further information please contact the DAF organisation. Pictures and technical illustrations are not binding in detail and can differ from the standard specification. Subject to modification without prior notice.