
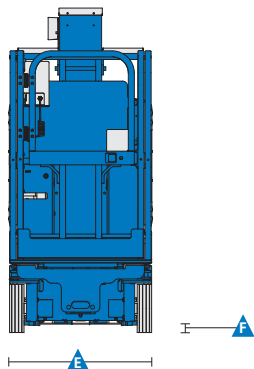
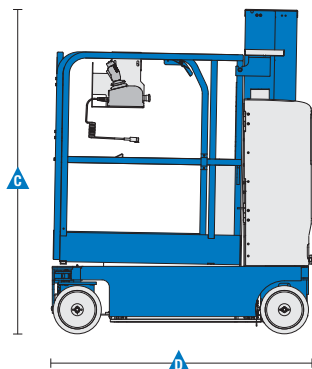


Aerial Work Platforms

Genie® Runabout™ Contractor

Specifications



| Models | GRC-12 | |
|---|--------------|-------------|
| Measurements | US | Metric |
| Working height* | 18 ft | 5.66 m |
| Platform height | 12 ft | 3.66 m |
| A B Platform dimensions (length x width) | | |
| Ext Platform dimensions - retracted | 38 x 29.5 in | .97 x .75 m |
| Ext Platform dimensions - extended | 55 x 29.5 in | 1.4 x .75 m |
| C Height - stowed | 67 in | 1.70 m |
| D Length - stowed | 4 ft 5.75 in | 1.37 m |
| E Width ANSI, CSA | 2 ft 5.5 in | .75 m |
| | CE, AUS | .80 m |
| F Ground clearance - center | 2.5 in | .06 m |

Productivity

| | | |
|--------------------------------|---------------|---------------------|
| Lift capacity | 500 lbs | 227 kg |
| Lift capacity - extension deck | 250 lbs | 113 kg |
| Drive speed - stowed | 2.5 mph | 4.0 km/h |
| Drive speed - raised | 0.5 mph | 0.8 km/h |
| Gradeability** | 30% | |
| Turning radius - inside | zero | zero |
| Turning radius - outside | 4 ft 7 in | 1.40 m |
| Raise / lower speed | 12 / 16 sec | 12 / 16 sec |
| Controls | | 24V DC proportional |
| Tires - solid non-marking | 10 x 3 x 8 in | 25 x 8 x 20 cm |

Power

| | | |
|---------------------------|--------------------------------|--------|
| Power source | 24V (four 6V 225 Ah batteries) | |
| Hydraulic system capacity | 2.2 gal | 8.33 L |

Weight***

| | | |
|-----------|-----------|--------|
| ANSI, CSA | 1,916 lbs | 869 kg |
| CE, AUS | 2,090 lbs | 948 kg |

Standards Compliance

ANSI A92.6, CSA B354.2, CE Compliance, AS 1418.10

* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.

** Gradeability applies to driving on slopes. See operator's manual for details regarding slope rating.

*** Weight will vary depending on options and/or country standards.

Features

Standard Features

Measurements

GRC-12

- 18 ft (5.66 m) working height
- 12 ft (3.66 m) platform height
- Up to 500 lbs (227 kg) lift capacity

Productivity

- 2-person rated
- Steel platform and extension deck with swing gate
- Auxiliary platform lowering
- Low 15.5 in (.39 m) platform entry height
- Steel tube-in-tube mast system
- Compact base 29.5 x 53.75 in (.75 x 1.37 m)
- Ground clearance 2.5 inches (stowed)
- Fully proportional lift and drive controls
- Battery charge indicator
- On-board diagnostic system
- AC power to platform
- Work station trays
- Descent and tilt alarm
- Zero inside turning radius
- Dual wheel brakes
- Hydraulic brake release
- Pothole protection
- Hinged rear ABS covers for easy access to all major electrical and hydraulic components
- Tie down attachment points
- Overhead crane attachment point
- Large forklift pockets access
- Non-marking solid tires

Power

- Automatic 25 amp battery charger

Options & Accessories

Productivity

- Dual flashing beacons
- Motion alarm
- Fluorescent tube caddy
- Automotive horn

Power

- 24V (four 6V 225 Ah batteries)
- 800 watt inverter (120-230V AC / 50-60 Hz)
- AGM maintenance-free batteries



Genie United States

18340 NE 76th Street
P.O. Box 97030
Redmond, Washington 98073-9730
Telephone +1 (425) 881-1800
Toll Free in USA/Canada +1 (800)-536-1800
Fax +1 (425) 883-3475

Genie Europe

The Maltings
Wharf Road
Grantham NG31 6BH
UK
Telephone +44 (0)1476 584333
Fax +44 (0)1476 584334
Email: AWP-InfoEurope@terex.com

Distributed By:

Effective Date: February, 2012. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade names of Terex Corporation and/or their subsidiaries in the USA and many other countries. Genie is a registered trademark of Terex South Dakota, Inc. © 2012 Terex Corporation.