



run ahead of the pack

KIOTI COMPACT TRACTOR LX500L



Specifications

| ENGINE | |
|--------------------|---------------------|
| Model | 4B243LWL |
| Engine Gross Power | 49(36.6) HP(Kw) |
| Displacement | 2,435(148.6) cc(cu) |
| Rated revolution | 2,600 rpm |
| Fuel tank capacity | 42(11.1) ℓ (us gal) |

| TRANSMISSION | |
|--------------------------|----------------------------------|
| Type | Manual |
| - No. of speeds | 16F X 16R |
| - Shuttle type | Synchronized shuttle |
| Diff. Lock | Rear Standard |
| Front wheel drive system | Hydrostatic |
| Traveling speed | |
| - Forward | 0.20~22.07(0.12~13.71) Km/h(mph) |
| - Reverse | 0.18~20.36(0.12~12.65) Km/h(mph) |

| BRAKES & CLUTCH | |
|-----------------|--------------------|
| Brakes | Wet disc type |
| Clutch | Dry single |
| Clutch Size | 260(10.24) mm(in.) |

| POWER TAKE-OFF | |
|----------------|-------------|
| Type | Dependent |
| PTO revolution | 540 / 1,000 |

| 3-POINT HITCH | |
|---|------------------------|
| Type | Category I |
| Lift Capacity at lift point | 1,230(2,712) kg.f(lbs) |
| Lift Capacity at 24 in. behind lift point | 1,013(2,233) kg.f(lbs) |
| Drawbar type | Swing drawbar(Clevis) |

| HYDRAULICS | |
|------------------------------------|--------------------------------|
| 3-pt. Hitch control | Position, Draft, mixed control |
| Implement Pump | 28.98(7.66) ℓ /min(gpm) |
| Power steering Pump | 24.07(6.36) ℓ /min(gpm) |
| Total Hydraulic flow | 53.05(14.01) ℓ /min(gpm) |
| No. of standard remote PORT (Rear) | 4 |


| STANDARD TIRES | |
|-----------------------|--------------|
| Agri Tire (available) | |
| - Front | 8-16 |
| - Rear | 12.4-24 |
| Turf Tire | |
| - Front | 29.5-12.5-15 |
| - Rear | 41-14-20 |

| | |
|-----------------|----------|
| Industrial Tire | |
| - Front | 10-16.5 |
| - Rear | 43-16-20 |

| DIMENSIONS | | |
|------------------------------------|------------------------|---------------------|
| Length (with 3 point&front weight) | 3,500(137.8) mm(in.) | |
| Width | 1,440(56.7) mm(in.) | |
| Height | 2,365(93.1) mm(in.) | |
| Wheelbase | 1,700(66.9) mm(in.) | |
| Ground Clearance | 335(13.2) mm(in.) | |
| Front Tread-Std. Tires | 1,235(48.6) mm(in.) | |
| Rear Tread-std. Tires | Min | 1,125(44.3) mm(in.) |
| | Max | 1,345(53) mm(in.) |
| Weight | 1,690(3,725) kg.f(lbs) | |



**Kioti Tractor/
Daedong Industrial. Co., Ltd.**
1422-5, Seocho-Dong, Seocho-Ku, Seoul, Korea
tel 82-2-3470-7454~9 • fax 82-2-3470-7485
web www.daedong.co.kr

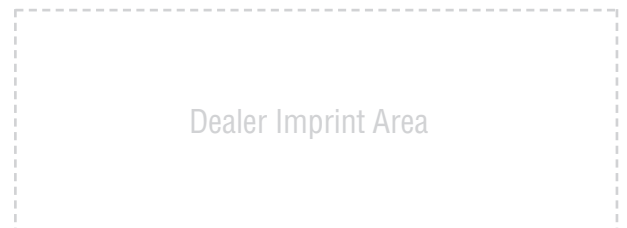

Kioti Tractor / Daedong Ind. Co., Ltd. / 2008.01(EU)

