

# MICHELIN AGRIBIB

Traction

Service life

Stubble resistance



**High levels of performance throughout its life**

- Optimal traction level
- Special tread pattern for excellent self-cleaning capacity

**Service life**

- Deep tread lugs for a longer service life

**Stubble resistance**

- Proven radial casing endurance
- Damage-resistant rubber

**Optimized tread pattern**


- Lug angle 45° for better transfer of tractive force to the ground
- Hinge in the center of the tread aids self-cleaning

**Deep tread lugs**

- R1W lug
- Lug design: straight profile



**Damage-resistant rubber**

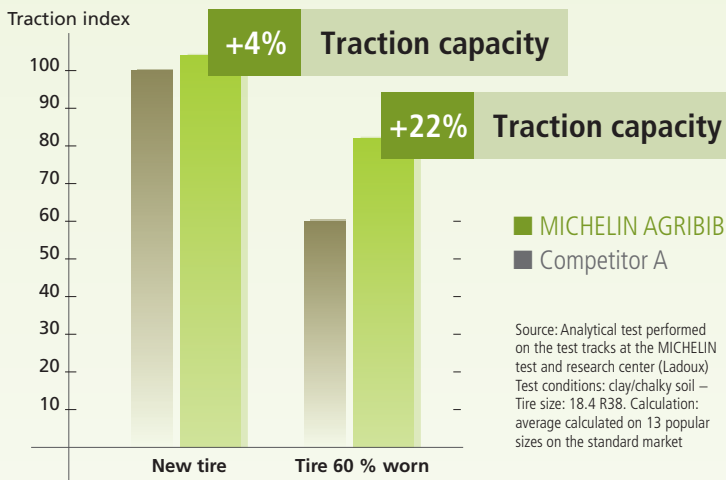

**Sizes**

|      |                   |        |                   |        |                              |
|------|-------------------|--------|-------------------|--------|------------------------------|
| 9.5  | R24 TL 107A8/104B | 380/85 | R30 TL 135A8/135B | 380/80 | R38 TL 142A8/139D            |
| 11.2 | R24 TL 114A8/111B | 420/90 | R30 TL 147A8/147B | 380/95 | R38 TL 147A8/147B <b>NEW</b> |
| 12.4 | R24 TL 119A8/116B | 18.4   | R34 TL 144A8/141B | 420/85 | R38 TL 144A8/144B            |
| 13.6 | R24 TL 121A8/118B | 320/85 | R34 TL 133A8/130B | 520/85 | R38 TL 155A8/155B            |
| 14.9 | R24 TL 126A8/123B | 380/85 | R34 TL 137A8/137B | 480/80 | R42 TL 156A8/156B            |
| 16.9 | R24 TL 134A8/131B | 420/85 | R34 TL 142A8/142B | 520/85 | R42 TL 157A8/157B            |
| 12.4 | R28 TL 121A8/118B | 12.4   | R36 TL 124A8/121B | 420/80 | R46 TL 151A8/148B            |
| 13.6 | R28 TL 123A8/120B | 12.4   | R38 TL 125A8/122B | 480/80 | R46 TL 158A8/158B            |
| 14.9 | R28 TL 128A8/125B | 13.6   | R38 TL 128A8/125B | 520/85 | R46 TL 158A8/155B            |
| 16.9 | R28 TL 136A8/133B | 18.4   | R38 TL 146A8/143B | 480/80 | R50 TL 159A8/159B            |
| 16.9 | R30 TL 137A8/134B | 20.8   | R38 TL 153A8/150B | 480/95 | R50 TL 164A8/164B <b>NEW</b> |
| 18.4 | R30 TL 142A8/139B |        |                   |        |                              |



### 9.5 R24 107A8/104B TL AGRIBIB

MSPN: 57821

CAI: 123932

| Load per tire (single) |                   |                   |                  |          |
|------------------------|-------------------|-------------------|------------------|----------|
| 30 mph<br>50 km/h      | 25 mph<br>40 km/h | 20 mph<br>30 km/h | 6 mph<br>10 km/h | Pressure |
|                        |                   | 1,280 lbs         | 1,650 lbs        | 7 psi    |
|                        |                   | 580 kgs           | 750 kgs          | 0.5 bar  |
| 1,300 lbs              | 1,390 lbs         | 1,500 lbs         | 1,900 lbs        | 9 psi    |
| 590 kgs                | 630 kgs           | 680 kgs           | 860 kgs          | 0.6 bar  |
| 1,430 lbs              | 1,540 lbs         | 1,650 lbs         | 2,090 lbs        | 12 psi   |
| 650 kgs                | 700 kgs           | 750 kgs           | 950 kgs          | 0.8 bar  |
| 1,580 lbs              | 1,700 lbs         | 1,820 lbs         | 2,300 lbs        | 15 psi   |
| 715 kgs                | 770 kgs           | 825 kgs           | 1,045 kgs        | 1.0 bar  |
| 1,710 lbs              | 1,850 lbs         | 1,970 lbs         | 2,500 lbs        | 17 psi   |
| 775 kgs                | 840 kgs           | 895 kgs           | 1,135 kgs        | 1.2 bar  |
| 1,850 lbs              | 2,010 lbs         | 2,140 lbs         | 2,710 lbs        | 20 psi   |
| 840 kgs                | 910 kgs           | 970 kgs           | 1,230 kgs        | 1.4 bar  |
| 1,980 lbs              | 2,160 lbs         | 2,290 lbs         | 2,910 lbs        | 23 psi   |
| 900 kgs                | 980 kgs           | 1,040 kgs         | 1,320 kgs        | 1.6 bar  |
|                        |                   |                   | 3,020 lbs        | 25 psi   |
|                        |                   |                   | 1,370 kgs        | 1.7 bar  |
|                        |                   |                   | 3,120 lbs        | 26 psi   |
|                        |                   |                   | 1,415 kgs        | 1.8 bar  |
|                        |                   |                   | 3,220 lbs        | 28 psi   |
|                        |                   |                   | 1,460 kgs        | 1.9 bar  |

\*All load values are for maximum indicated speeds at low torque.  
**\*20 mph (30 km/h): high torque field work or max road speed.**  
 \*All load values for ground slopes up to 20% (above 20% consult Michelin)

| Tire Technical Data  |                  |                   |                        |                             |                             |    |                |        |
|--|------------------|-------------------|------------------------|-----------------------------|-----------------------------|----|----------------|--------|
| Unloaded Dimensions  |                  | Loaded Dimensions |                        | Rims<br>(preferred in bold) |                             |    |                |        |
| Overall Width  | Overall Diameter | Loaded Radius     | Rolling Circumference  |                             |                             |    |                |        |
| 9.7 in   | 40.9 in          | 18.6 in           | 121.9 in               | <b>W8</b><br>W7             |                             |    |                |        |
| 247 mm   | 1,040 mm         | 472 mm            | 3,097 mm               |                             |                             |    |                |        |
| <table border="1"> <tr><td>Rolling Circumference Index</td></tr> <tr><td>35</td></tr> <tr><td>Number of Lugs</td></tr> <tr><td>18 x 2</td></tr> </table> |                  |                   |                        |                             | Rolling Circumference Index | 35 | Number of Lugs | 18 x 2 |
| Rolling Circumference Index  |                  |                   |                        |                             |                             |    |                |        |
| 35   |                  |                   |                        |                             |                             |    |                |        |
| Number of Lugs   |                  |                   |                        |                             |                             |    |                |        |
| 18 x 2   |                  |                   |                        |                             |                             |    |                |        |
| Gross Flat Plate   | Tire Weight      | 100% Tire Volume  | Centerline Tread Depth | Minimum Dual/Triple Spacing |                             |    |                |        |
| 103 sq in  | 69 lbs           | 22.7 gals         | 40/32nd                | 13.4 in                     |                             |    |                |        |
| 667 sq cm  | 31 kgs           | 86 liters         | 32 mm                  | 340 mm                      |                             |    |                |        |

### 11.2 R24 114A8/111B TL AGRIBIB

MSPN: 70146

CAI: 123864

| Load per tire (single) |                   |                   |                  |          |
|------------------------|-------------------|-------------------|------------------|----------|
| 30 mph<br>50 km/h      | 25 mph<br>40 km/h | 20 mph<br>30 km/h | 6 mph<br>10 km/h | Pressure |
|                        |                   | 1,570 lbs         | 1,980 lbs        | 7 psi    |
|                        |                   | 710 kgs           | 900 kgs          | 0.5 bar  |
| 1,590 lbs              | 1,700 lbs         | 1,810 lbs         | 2,290 lbs        | 9 psi    |
| 720 kgs                | 770 kgs           | 820 kgs           | 1,040 kgs        | 0.6 bar  |
| 1,750 lbs              | 1,870 lbs         | 2,010 lbs         | 2,540 lbs        | 12 psi   |
| 795 kgs                | 850 kgs           | 910 kgs           | 1,150 kgs        | 0.8 bar  |
| 1,920 lbs              | 2,060 lbs         | 2,190 lbs         | 2,790 lbs        | 15 psi   |
| 870 kgs                | 935 kgs           | 995 kgs           | 1,265 kgs        | 1.0 bar  |
| 2,070 lbs              | 2,240 lbs         | 2,390 lbs         | 3,030 lbs        | 17 psi   |
| 940 kgs                | 1,015 kgs         | 1,085 kgs         | 1,375 kgs        | 1.2 bar  |
| 2,240 lbs              | 2,430 lbs         | 2,580 lbs         | 3,280 lbs        | 20 psi   |
| 1,015 kgs              | 1,100 kgs         | 1,170 kgs         | 1,490 kgs        | 1.4 bar  |
| 2,400 lbs              | 2,600 lbs         | 2,780 lbs         | 3,530 lbs        | 23 psi   |
| 1,090 kgs              | 1,180 kgs         | 1,260 kgs         | 1,600 kgs        | 1.6 bar  |
|                        |                   |                   | 3,660 lbs        | 25 psi   |
|                        |                   |                   | 1,660 kgs        | 1.7 bar  |
|                        |                   |                   | 3,780 lbs        | 26 psi   |
|                        |                   |                   | 1,715 kgs        | 1.8 bar  |
|                        |                   |                   | 3,900 lbs        | 28 psi   |
|                        |                   |                   | 1,770 kgs        | 1.9 bar  |

\*All load values are for maximum indicated speeds at low torque.  
**\*20 mph (30 km/h): high torque field work or max road speed.**  
 \*All load values for ground slopes up to 20% (above 20% consult Michelin)

| Tire Technical Data  |                  |                   |                        |                             |                             |    |                |        |
|--|------------------|-------------------|------------------------|-----------------------------|-----------------------------|----|----------------|--------|
| Unloaded Dimensions  |                  | Loaded Dimensions |                        | Rims<br>(preferred in bold) |                             |    |                |        |
| Overall Width  | Overall Diameter | Loaded Radius     | Rolling Circumference  |                             |                             |    |                |        |
| 11.6 in  | 43.0 in          | 19.6 in           | 129.6 in               | <b>W10</b><br>W9            |                             |    |                |        |
| 294 mm   | 1,092 mm         | 498 mm            | 3,292 mm               |                             |                             |    |                |        |
| <table border="1"> <tr><td>Rolling Circumference Index</td></tr> <tr><td>36</td></tr> <tr><td>Number of Lugs</td></tr> <tr><td>19 x 2</td></tr> </table> |                  |                   |                        |                             | Rolling Circumference Index | 36 | Number of Lugs | 19 x 2 |
| Rolling Circumference Index  |                  |                   |                        |                             |                             |    |                |        |
| 36   |                  |                   |                        |                             |                             |    |                |        |
| Number of Lugs   |                  |                   |                        |                             |                             |    |                |        |
| 19 x 2   |                  |                   |                        |                             |                             |    |                |        |
| Gross Flat Plate   | Tire Weight      | 100% Tire Volume  | Centerline Tread Depth | Minimum Dual/Triple Spacing |                             |    |                |        |
| 131 sq in  | 88 lbs           | 32.5 gals         | 47/32nd                | 15.4 in                     |                             |    |                |        |
| 848 sq cm  | 40 kgs           | 123 liters        | 37 mm                  | 392 mm                      |                             |    |                |        |

**NOTE:**

- When used as duals, tire load carrying capacity must be reduced 12%
- When used as triples, tire load carrying capacity must be reduced 18%



# MICHELIN AGRIBIB

## 12.4 R24 119A8/116B TL AGRIBIB

MSPN: 78449

CAI: 123788

| Load per tire (single)      |                        |                         |                        |                             | Tire Technical Data   |                     |                   |                          |                                |                             |                  |                        |                             |  |                   |                         |                  |
|-----------------------------|------------------------|-------------------------|------------------------|-----------------------------|---|---------------------|-------------------|--------------------------|--------------------------------|-----------------------------|------------------|------------------------|-----------------------------|--|-------------------|-------------------------|------------------|
| 30 mph<br>50 km/h           | 25 mph<br>40 km/h      | 20 mph<br>30 km/h       | 6 mph<br>10 km/h       | Pressure                    | Unloaded Dimensions   |                     | Loaded Dimensions |                          | Rims<br>(preferred in<br>bold) |                             |                  |                        |                             |  |                   |                         |                  |
|                             |                        | 1,790 lbs<br>810 kgs    | 2,290 lbs<br>1,040 kgs | 7 psi<br>0.5 bar            | Overall<br>Width  | Overall<br>Diameter | Loaded<br>Radius  | Rolling<br>Circumference |                                |                             |                  |                        |                             |  |                   |                         |                  |
| 1,830 lbs<br>830 kgs        | 1,940 lbs<br>880 kgs   | 2,090 lbs<br>950 kgs    | 2,650 lbs<br>1,200 kgs | 9 psi<br>0.6 bar            | 12.8 in<br>324 mm   | 45.2 in<br>1,149 mm | 20.5 in<br>520 mm | 134.6 in<br>3,420 mm     | <b>W11</b><br>W10              |                             |                  |                        |                             |  |                   |                         |                  |
| 2,020 lbs<br>915 kgs        | 2,150 lbs<br>975 kgs   | 2,310 lbs<br>1,050 kgs  | 2,930 lbs<br>1,330 kgs | 12 psi<br>0.8 bar           | <table border="1"> <tr> <td>Rolling Circumference Index</td> </tr> <tr> <td>37</td> </tr> <tr> <td>Number of Lugs</td> </tr> <tr> <td>19 x 2</td> </tr> </table>  |                     |                   |                          |                                | Rolling Circumference Index | 37               | Number of Lugs         | 19 x 2                      | Tube MSPN<br>82631<br>Tube CAI<br>170037 |                   |                         |                  |
| Rolling Circumference Index |                        |                         |                        |                             |   |                     |                   |                          |                                |                             |                  |                        |                             |  |                   |                         |                  |
| 37                          |                        |                         |                        |                             |   |                     |                   |                          |                                |                             |                  |                        |                             |  |                   |                         |                  |
| Number of Lugs              |                        |                         |                        |                             |   |                     |                   |                          |                                |                             |                  |                        |                             |  |                   |                         |                  |
| 19 x 2                      |                        |                         |                        |                             |   |                     |                   |                          |                                |                             |                  |                        |                             |  |                   |                         |                  |
| 2,200 lbs<br>1,000 kgs      | 2,360 lbs<br>1,070 kgs | 2,550 lbs<br>1,155 kgs  | 3,220 lbs<br>1,460 kgs | 15 psi<br>1.0 bar           |   |                     |                   |                          |                                |                             |                  |                        |                             |  |                   |                         |                  |
| 2,380 lbs<br>1,080 kgs      | 2,580 lbs<br>1,170 kgs | 2,770 lbs<br>1,255 kgs  | 3,510 lbs<br>1,590 kgs | 17 psi<br>1.2 bar           | <table border="1"> <tr> <td>Gross Flat Plate</td> <td>Tire Weight</td> <td>100% Tire Volume</td> <td>Centerline Tread Depth</td> <td rowspan="2">Minimum Dual/Triple Spacing</td> </tr> <tr> <td>155 sq in<br/>998 sq cm</td> <td>113 lbs<br/>51 kgs</td> <td>40.7 gals<br/>154 liters</td> <td>52/32nd<br/>41 mm</td> </tr> </table>   |                     |                   |                          | Gross Flat Plate               | Tire Weight                 | 100% Tire Volume | Centerline Tread Depth | Minimum Dual/Triple Spacing | 155 sq in<br>998 sq cm                   | 113 lbs<br>51 kgs | 40.7 gals<br>154 liters | 52/32nd<br>41 mm |
| Gross Flat Plate            | Tire Weight            | 100% Tire Volume        | Centerline Tread Depth | Minimum Dual/Triple Spacing |   |                     |                   |                          |                                |                             |                  |                        |                             |  |                   |                         |                  |
| 155 sq in<br>998 sq cm      | 113 lbs<br>51 kgs      | 40.7 gals<br>154 liters | 52/32nd<br>41 mm       |                             |   |                     |                   |                          |                                |                             |                  |                        |                             |  |                   |                         |                  |
| 2,570 lbs<br>1,165 kgs      | 2,790 lbs<br>1,265 kgs | 3,000 lbs<br>1,360 kgs  | 3,780 lbs<br>1,715 kgs | 20 psi<br>1.4 bar           | <table border="1"> <tr> <td>Gross Flat Plate</td> <td>Tire Weight</td> <td>100% Tire Volume</td> <td>Centerline Tread Depth</td> <td rowspan="2">Minimum Dual/Triple Spacing</td> </tr> <tr> <td>168 sq in<br/>1,086 sq cm</td> <td>135 lbs<br/>61 kgs</td> <td>53.4 gals<br/>202 liters</td> <td>54/32nd<br/>43 mm</td> </tr> </table> |                     |                   |                          | Gross Flat Plate               | Tire Weight                 | 100% Tire Volume | Centerline Tread Depth | Minimum Dual/Triple Spacing | 168 sq in<br>1,086 sq cm                 | 135 lbs<br>61 kgs | 53.4 gals<br>202 liters | 54/32nd<br>43 mm |
| Gross Flat Plate            | Tire Weight            | 100% Tire Volume        | Centerline Tread Depth | Minimum Dual/Triple Spacing |   |                     |                   |                          |                                |                             |                  |                        |                             |  |                   |                         |                  |
| 168 sq in<br>1,086 sq cm    | 135 lbs<br>61 kgs      | 53.4 gals<br>202 liters | 54/32nd<br>43 mm       |                             |   |                     |                   |                          |                                |                             |                  |                        |                             |  |                   |                         |                  |
| 2,760 lbs<br>1,250 kgs      | 3,000 lbs<br>1,360 kgs | 3,220 lbs<br>1,460 kgs  | 4,070 lbs<br>1,845 kgs | 23 psi<br>1.6 bar           | <table border="1"> <tr> <td>Gross Flat Plate</td> <td>Tire Weight</td> <td>100% Tire Volume</td> <td>Centerline Tread Depth</td> <td rowspan="2">Minimum Dual/Triple Spacing</td> </tr> <tr> <td>168 sq in<br/>1,086 sq cm</td> <td>135 lbs<br/>61 kgs</td> <td>53.4 gals<br/>202 liters</td> <td>54/32nd<br/>43 mm</td> </tr> </table> |                     |                   |                          | Gross Flat Plate               | Tire Weight                 | 100% Tire Volume | Centerline Tread Depth | Minimum Dual/Triple Spacing | 168 sq in<br>1,086 sq cm                 | 135 lbs<br>61 kgs | 53.4 gals<br>202 liters | 54/32nd<br>43 mm |
| Gross Flat Plate            | Tire Weight            | 100% Tire Volume        | Centerline Tread Depth | Minimum Dual/Triple Spacing |   |                     |                   |                          |                                |                             |                  |                        |                             |  |                   |                         |                  |
| 168 sq in<br>1,086 sq cm    | 135 lbs<br>61 kgs      | 53.4 gals<br>202 liters | 54/32nd<br>43 mm       |                             |   |                     |                   |                          |                                |                             |                  |                        |                             |  |                   |                         |                  |
|                             |                        |                         | 4,210 lbs<br>1,910 kgs | 25 psi<br>1.7 bar           | <table border="1"> <tr> <td>Gross Flat Plate</td> <td>Tire Weight</td> <td>100% Tire Volume</td> <td>Centerline Tread Depth</td> <td rowspan="2">Minimum Dual/Triple Spacing</td> </tr> <tr> <td>168 sq in<br/>1,086 sq cm</td> <td>135 lbs<br/>61 kgs</td> <td>53.4 gals<br/>202 liters</td> <td>54/32nd<br/>43 mm</td> </tr> </table> |                     |                   |                          | Gross Flat Plate               | Tire Weight                 | 100% Tire Volume | Centerline Tread Depth | Minimum Dual/Triple Spacing | 168 sq in<br>1,086 sq cm                 | 135 lbs<br>61 kgs | 53.4 gals<br>202 liters | 54/32nd<br>43 mm |
| Gross Flat Plate            | Tire Weight            | 100% Tire Volume        | Centerline Tread Depth | Minimum Dual/Triple Spacing |   |                     |                   |                          |                                |                             |                  |                        |                             |  |                   |                         |                  |
| 168 sq in<br>1,086 sq cm    | 135 lbs<br>61 kgs      | 53.4 gals<br>202 liters | 54/32nd<br>43 mm       |                             |   |                     |                   |                          |                                |                             |                  |                        |                             |  |                   |                         |                  |
|                             |                        |                         | 4,350 lbs<br>1,975 kgs | 26 psi<br>1.8 bar           | <table border="1"> <tr> <td>Gross Flat Plate</td> <td>Tire Weight</td> <td>100% Tire Volume</td> <td>Centerline Tread Depth</td> <td rowspan="2">Minimum Dual/Triple Spacing</td> </tr> <tr> <td>168 sq in<br/>1,086 sq cm</td> <td>135 lbs<br/>61 kgs</td> <td>53.4 gals<br/>202 liters</td> <td>54/32nd<br/>43 mm</td> </tr> </table> |                     |                   |                          | Gross Flat Plate               | Tire Weight                 | 100% Tire Volume | Centerline Tread Depth | Minimum Dual/Triple Spacing | 168 sq in<br>1,086 sq cm                 | 135 lbs<br>61 kgs | 53.4 gals<br>202 liters | 54/32nd<br>43 mm |
| Gross Flat Plate            | Tire Weight            | 100% Tire Volume        | Centerline Tread Depth | Minimum Dual/Triple Spacing |   |                     |                   |                          |                                |                             |                  |                        |                             |  |                   |                         |                  |
| 168 sq in<br>1,086 sq cm    | 135 lbs<br>61 kgs      | 53.4 gals<br>202 liters | 54/32nd<br>43 mm       |                             |   |                     |                   |                          |                                |                             |                  |                        |                             |  |                   |                         |                  |
|                             |                        |                         | 4,500 lbs<br>2,040 kgs | 28 psi<br>1.9 bar           | <table border="1"> <tr> <td>Gross Flat Plate</td> <td>Tire Weight</td> <td>100% Tire Volume</td> <td>Centerline Tread Depth</td> <td rowspan="2">Minimum Dual/Triple Spacing</td> </tr> <tr> <td>168 sq in<br/>1,086 sq cm</td> <td>135 lbs<br/>61 kgs</td> <td>53.4 gals<br/>202 liters</td> <td>54/32nd<br/>43 mm</td> </tr> </table> |                     |                   |                          | Gross Flat Plate               | Tire Weight                 | 100% Tire Volume | Centerline Tread Depth | Minimum Dual/Triple Spacing | 168 sq in<br>1,086 sq cm                 | 135 lbs<br>61 kgs | 53.4 gals<br>202 liters | 54/32nd<br>43 mm |
| Gross Flat Plate            | Tire Weight            | 100% Tire Volume        | Centerline Tread Depth | Minimum Dual/Triple Spacing |   |                     |                   |                          |                                |                             |                  |                        |                             |  |                   |                         |                  |
| 168 sq in<br>1,086 sq cm    | 135 lbs<br>61 kgs      | 53.4 gals<br>202 liters | 54/32nd<br>43 mm       |                             |   |                     |                   |                          |                                |                             |                  |                        |                             |  |                   |                         |                  |
|                             |                        |                         |                        |                             | <table border="1"> <tr> <td>Gross Flat Plate</td> <td>Tire Weight</td> <td>100% Tire Volume</td> <td>Centerline Tread Depth</td> <td rowspan="2">Minimum Dual/Triple Spacing</td> </tr> <tr> <td>168 sq in<br/>1,086 sq cm</td> <td>135 lbs<br/>61 kgs</td> <td>53.4 gals<br/>202 liters</td> <td>54/32nd<br/>43 mm</td> </tr> </table> |                     |                   |                          | Gross Flat Plate               | Tire Weight                 | 100% Tire Volume | Centerline Tread Depth | Minimum Dual/Triple Spacing | 168 sq in<br>1,086 sq cm                 | 135 lbs<br>61 kgs | 53.4 gals<br>202 liters | 54/32nd<br>43 mm |
| Gross Flat Plate            | Tire Weight            | 100% Tire Volume        | Centerline Tread Depth | Minimum Dual/Triple Spacing |   |                     |                   |                          |                                |                             |                  |                        |                             |  |                   |                         |                  |
| 168 sq in<br>1,086 sq cm    | 135 lbs<br>61 kgs      | 53.4 gals<br>202 liters | 54/32nd<br>43 mm       |                             |   |                     |                   |                          |                                |                             |                  |                        |                             |  |                   |                         |                  |

\*All load values are for maximum indicated speeds at low torque.

\*20 mph (30 km/h): high torque field work or max road speed.

\*All load values for ground slopes up to 20% (above 20% consult Michelin)

## 13.6 R24 121A8/118B TL AGRIBIB

MSPN: 97644

CAI: 123868

| Load per tire (single)      |                        |                         |                        |                             |                   | Tire Technical Data   |                     |                   |                          |                                |                             |                  |                        |                             |  |                   |                         |                  |
|-----------------------------|------------------------|-------------------------|------------------------|-----------------------------|-------------------|---|---------------------|-------------------|--------------------------|--------------------------------|-----------------------------|------------------|------------------------|-----------------------------|--|-------------------|-------------------------|------------------|
| 30 mph<br>50 km/h           | 25 mph<br>40 km/h      | 20 mph<br>30 km/h       | 6 mph<br>10 km/h       | 25 mph Dual<br>40 km/h Dual | Pressure          | Unloaded Dimensions   |                     | Loaded Dimensions |                          | Rims<br>(preferred in<br>bold) |                             |                  |                        |                             |  |                   |                         |                  |
|                             |                        |                         |                        | 1,220 lbs<br>555 kgs        | 6 psi<br>0.4 bar  | Overall<br>Width  | Overall<br>Diameter | Loaded<br>Radius  | Rolling<br>Circumference |                                |                             |                  |                        |                             |  |                   |                         |                  |
|                             |                        | 1,920 lbs<br>870 kgs    | 2,450 lbs<br>1,110 kgs | 1,520 lbs<br>690 kgs        | 7 psi<br>0.5 bar  | 14.4 in<br>366 mm   | 47.1 in<br>1,197 mm | 21.2 in<br>539 mm | 140.1 in<br>3,559 mm     | <b>W12</b><br>W11              |                             |                  |                        |                             |  |                   |                         |                  |
| 1,920 lbs<br>870 kgs        | 2,070 lbs<br>940 kgs   | 2,230 lbs<br>1,010 kgs  | 2,820 lbs<br>1,280 kgs | 1,820 lbs<br>825 kgs        | 9 psi<br>0.6 bar  | <table border="1"> <tr> <td>Rolling Circumference Index</td> </tr> <tr> <td>38</td> </tr> <tr> <td>Number of Lugs</td> </tr> <tr> <td>19 x 2</td> </tr> </table>  |                     |                   |                          |                                | Rolling Circumference Index | 38               | Number of Lugs         | 19 x 2                      | Tube MSPN<br>89251<br>Tube CAI<br>170039 |                   |                         |                  |
| Rolling Circumference Index |                        |                         |                        |                             |                   |   |                     |                   |                          |                                |                             |                  |                        |                             |  |                   |                         |                  |
| 38                          |                        |                         |                        |                             |                   |   |                     |                   |                          |                                |                             |                  |                        |                             |  |                   |                         |                  |
| Number of Lugs              |                        |                         |                        |                             |                   |   |                     |                   |                          |                                |                             |                  |                        |                             |  |                   |                         |                  |
| 19 x 2                      |                        |                         |                        |                             |                   |   |                     |                   |                          |                                |                             |                  |                        |                             |  |                   |                         |                  |
| 2,120 lbs<br>960 kgs        | 2,290 lbs<br>1,040 kgs | 2,470 lbs<br>1,120 kgs  | 3,130 lbs<br>1,420 kgs | 2,020 lbs<br>915 kgs        | 12 psi<br>0.8 bar |   |                     |                   |                          |                                |                             |                  |                        |                             |  |                   |                         |                  |
| 2,310 lbs<br>1,050 kgs      | 2,520 lbs<br>1,145 kgs | 2,700 lbs<br>1,225 kgs  | 3,430 lbs<br>1,555 kgs | 2,220 lbs<br>1,005 kgs      | 15 psi<br>1.0 bar | <table border="1"> <tr> <td>Gross Flat Plate</td> <td>Tire Weight</td> <td>100% Tire Volume</td> <td>Centerline Tread Depth</td> <td rowspan="2">Minimum Dual/Triple Spacing</td> </tr> <tr> <td>168 sq in<br/>1,086 sq cm</td> <td>135 lbs<br/>61 kgs</td> <td>53.4 gals<br/>202 liters</td> <td>54/32nd<br/>43 mm</td> </tr> </table> |                     |                   |                          | Gross Flat Plate               | Tire Weight                 | 100% Tire Volume | Centerline Tread Depth | Minimum Dual/Triple Spacing | 168 sq in<br>1,086 sq cm                 | 135 lbs<br>61 kgs | 53.4 gals<br>202 liters | 54/32nd<br>43 mm |
| Gross Flat Plate            | Tire Weight            | 100% Tire Volume        | Centerline Tread Depth | Minimum Dual/Triple Spacing |                   |   |                     |                   |                          |                                |                             |                  |                        |                             |  |                   |                         |                  |
| 168 sq in<br>1,086 sq cm    | 135 lbs<br>61 kgs      | 53.4 gals<br>202 liters | 54/32nd<br>43 mm       |                             |                   |   |                     |                   |                          |                                |                             |                  |                        |                             |  |                   |                         |                  |
| 2,510 lbs<br>1,140 kgs      | 2,740 lbs<br>1,245 kgs | 2,940 lbs<br>1,335 kgs  | 3,740 lbs<br>1,695 kgs | 2,410 lbs<br>1,095 kgs      | 17 psi<br>1.2 bar | <table border="1"> <tr> <td>Gross Flat Plate</td> <td>Tire Weight</td> <td>100% Tire Volume</td> <td>Centerline Tread Depth</td> <td rowspan="2">Minimum Dual/Triple Spacing</td> </tr> <tr> <td>168 sq in<br/>1,086 sq cm</td> <td>135 lbs<br/>61 kgs</td> <td>53.4 gals<br/>202 liters</td> <td>54/32nd<br/>43 mm</td> </tr> </table> |                     |                   |                          | Gross Flat Plate               | Tire Weight                 | 100% Tire Volume | Centerline Tread Depth | Minimum Dual/Triple Spacing | 168 sq in<br>1,086 sq cm                 | 135 lbs<br>61 kgs | 53.4 gals<br>202 liters | 54/32nd<br>43 mm |
| Gross Flat Plate            | Tire Weight            | 100% Tire Volume        | Centerline Tread Depth | Minimum Dual/Triple Spacing |                   |   |                     |                   |                          |                                |                             |                  |                        |                             |  |                   |                         |                  |
| 168 sq in<br>1,086 sq cm    | 135 lbs<br>61 kgs      | 53.4 gals<br>202 liters | 54/32nd<br>43 mm       |                             |                   |   |                     |                   |                          |                                |                             |                  |                        |                             |  |                   |                         |                  |
| 2,710 lbs<br>1,230 kgs      | 2,980 lbs<br>1,350 kgs | 3,170 lbs<br>1,440 kgs  | 4,050 lbs<br>1,835 kgs | 2,610 lbs<br>1,185 kgs      | 20 psi<br>1.4 bar | <table border="1"> <tr> <td>Gross Flat Plate</td> <td>Tire Weight</td> <td>100% Tire Volume</td> <td>Centerline Tread Depth</td> <td rowspan="2">Minimum Dual/Triple Spacing</td> </tr> <tr> <td>168 sq in<br/>1,086 sq cm</td> <td>135 lbs<br/>61 kgs</td> <td>53.4 gals<br/>202 liters</td> <td>54/32nd<br/>43 mm</td> </tr> </table> |                     |                   |                          | Gross Flat Plate               | Tire Weight                 | 100% Tire Volume | Centerline Tread Depth | Minimum Dual/Triple Spacing | 168 sq in<br>1,086 sq cm                 | 135 lbs<br>61 kgs | 53.4 gals<br>202 liters | 54/32nd<br>43 mm |
| Gross Flat Plate            | Tire Weight            | 100% Tire Volume        | Centerline Tread Depth | Minimum Dual/Triple Spacing |                   |   |                     |                   |                          |                                |                             |                  |                        |                             |  |                   |                         |                  |
| 168 sq in<br>1,086 sq cm    | 135 lbs<br>61 kgs      | 53.4 gals<br>202 liters | 54/32nd<br>43 mm       |                             |                   |   |                     |                   |                          |                                |                             |                  |                        |                             |  |                   |                         |                  |
| 2,910 lbs<br>1,320 kgs      | 3,200 lbs<br>1,450 kgs | 3,420 lbs<br>1,550 kgs  | 4,340 lbs<br>1,970 kgs | 2,810 lbs<br>1,275 kgs      | 23 psi<br>1.6 bar | <table border="1"> <tr> <td>Gross Flat Plate</td> <td>Tire Weight</td> <td>100% Tire Volume</td> <td>Centerline Tread Depth</td> <td rowspan="2">Minimum Dual/Triple Spacing</td> </tr> <tr> <td>168 sq in<br/>1,086 sq cm</td> <td>135 lbs<br/>61 kgs</td> <td>53.4 gals<br/>202 liters</td> <td>54/32nd<br/>43 mm</td> </tr> </table> |                     |                   |                          | Gross Flat Plate               | Tire Weight                 | 100% Tire Volume | Centerline Tread Depth | Minimum Dual/Triple Spacing | 168 sq in<br>1,086 sq cm                 | 135 lbs<br>61 kgs | 53.4 gals<br>202 liters | 54/32nd<br>43 mm |
| Gross Flat Plate            | Tire Weight            | 100% Tire Volume        | Centerline Tread Depth | Minimum Dual/Triple Spacing |                   |   |                     |                   |                          |                                |                             |                  |                        |                             |  |                   |                         |                  |
| 168 sq in<br>1,086 sq cm    | 135 lbs<br>61 kgs      | 53.4 gals<br>202 liters | 54/32nd<br>43 mm       |                             |                   |   |                     |                   |                          |                                |                             |                  |                        |                             |  |                   |                         |                  |
|                             |                        |                         | 4,650 lbs<br>2,110 kgs |                             | 26 psi<br>1.8 bar | <table border="1"> <tr> <td>Gross Flat Plate</td> <td>Tire Weight</td> <td>100% Tire Volume</td> <td>Centerline Tread Depth</td> <td rowspan="2">Minimum Dual/Triple Spacing</td> </tr> <tr> <td>168 sq in<br/>1,086 sq cm</td> <td>135 lbs<br/>61 kgs</td> <td>53.4 gals<br/>202 liters</td> <td>54/32nd<br/>43 mm</td> </tr> </table> |                     |                   |                          | Gross Flat Plate               | Tire Weight                 | 100% Tire Volume | Centerline Tread Depth | Minimum Dual/Triple Spacing | 168 sq in<br>1,086 sq cm                 | 135 lbs<br>61 kgs | 53.4 gals<br>202 liters | 54/32nd<br>43 mm |
| Gross Flat Plate            | Tire Weight            | 100% Tire Volume        | Centerline Tread Depth | Minimum Dual/Triple Spacing |                   |   |                     |                   |                          |                                |                             |                  |                        |                             |  |                   |                         |                  |
| 168 sq in<br>1,086 sq cm    | 135 lbs<br>61 kgs      | 53.4 gals<br>202 liters | 54/32nd<br>43 mm       |                             |                   |   |                     |                   |                          |                                |                             |                  |                        |                             |  |                   |                         |                  |
|                             |                        |                         | 4,810 lbs<br>2,180 kgs |                             | 28 psi<br>1.9 bar | <table border="1"> <tr> <td>Gross Flat Plate</td> <td>Tire Weight</td> <td>100% Tire Volume</td> <td>Centerline Tread Depth</td> <td rowspan="2">Minimum Dual/Triple Spacing</td> </tr> <tr> <td>168 sq in<br/>1,086 sq cm</td> <td>135 lbs<br/>61 kgs</td> <td>53.4 gals<br/>202 liters</td> <td>54/32nd<br/>43 mm</td> </tr> </table> |                     |                   |                          | Gross Flat Plate               | Tire Weight                 | 100% Tire Volume | Centerline Tread Depth | Minimum Dual/Triple Spacing | 168 sq in<br>1,086 sq cm                 | 135 lbs<br>61 kgs | 53.4 gals<br>202 liters | 54/32nd<br>43 mm |
| Gross Flat Plate            | Tire Weight            | 100% Tire Volume        | Centerline Tread Depth | Minimum Dual/Triple Spacing |                   |   |                     |                   |                          |                                |                             |                  |                        |                             |  |                   |                         |                  |
| 168 sq in<br>1,086 sq cm    | 135 lbs<br>61 kgs      | 53.4 gals<br>202 liters | 54/32nd<br>43 mm       |                             |                   |   |                     |                   |                          |                                |                             |                  |                        |                             |  |                   |                         |                  |

\*All load values are for maximum indicated speeds at low torque.

\*20 mph (30 km/h): high torque field work or max road speed.

\*All load values for ground slopes up to 20% (above 20% consult Michelin)

## NOTE:

- When used as duals, tire load carrying capacity must be reduced 12%
- When used as triples, tire load carrying capacity must be reduced 18%





### 14.9 R24 126A8/123B TL AGRIBIB

MSPN: 75971

CAI: 123848

| Load per tire (single) |                        |                        |                        |                             |                     | *All load values are for maximum indicated speeds at low torque.<br>*20 mph (30 km/h): high torque field work or max road speed.<br>*All load values for ground slopes up to 20% (above 20% consult Michelin) |                     |                         |                        |   |                    |               |                       |
|------------------------|------------------------|------------------------|------------------------|-----------------------------|---------------------|---|---------------------|-------------------------|------------------------|---|--------------------|---------------|-----------------------|
| 30 mph<br>50 km/h      | 25 mph<br>40 km/h      | 20 mph<br>30 km/h      | 6 mph<br>10 km/h       | 25 mph Dual<br>40 km/h Dual | Pressure            | Tire Technical Data   |                     |                         |                        | Rims<br>(preferred in bold)<br><b>W13</b><br>W11, W12 |                    |               |                       |
|                        |                        |                        |                        |                             | Unloaded Dimensions |   | Loaded Dimensions   |                         | Overall Width          |   | Overall Diameter   | Loaded Radius | Rolling Circumference |
|                        |                        |                        |                        | 1,460 lbs<br>660 kgs        | 6 psi<br>0.4 bar    | 16.1 in<br>408 mm   | 49.6 in<br>1,259 mm | 22.1 in<br>561 mm       |                        | 147.0 in<br>3,733 mm                                  |                    |               |                       |
|                        |                        | 2,250 lbs<br>1,020 kgs | 2,870 lbs<br>1,300 kgs | 1,810 lbs<br>820 kgs        | 7 psi<br>0.5 bar    | Rolling Circumference Index<br>39   |                     |                         |                        | Tube MSPN<br>96691                                    |                    |               |                       |
|                        |                        | 2,480 lbs<br>1,125 kgs | 2,710 lbs<br>1,230 kgs | 3,660 lbs<br>1,660 kgs      | 12 psi<br>0.8 bar   | Number of Lugs<br>19 x 2  |                     |                         |                        |   | Tube CAI<br>171114 |               |                       |
| 2,250 lbs<br>1,020 kgs | 2,450 lbs<br>1,110 kgs | 2,600 lbs<br>1,180 kgs | 3,310 lbs<br>1,500 kgs | 2,150 lbs<br>975 kgs        | 9 psi<br>0.6 bar    | Gross Flat Plate  | Tire Weight         | 100% Tire Volume        | Centerline Tread Depth | Minimum Dual/Triple Spacing                           |                    |               |                       |
| 2,480 lbs<br>1,125 kgs | 2,710 lbs<br>1,230 kgs | 2,890 lbs<br>1,310 kgs | 3,660 lbs<br>1,660 kgs | 2,380 lbs<br>1,080 kgs      | 12 psi<br>0.8 bar   | 200 sq in<br>1,291 sq cm  | 159 lbs<br>72 kgs   | 66.0 gals<br>250 liters | 60/32nd<br>48 mm       | 19.8 in<br>504 mm                                     |                    |               |                       |
| 1,125 kgs              | 1,230 kgs              | 1,310 kgs              | 1,660 kgs              | 1,080 kgs                   | 0.8 bar             |   |                     |                         |                        |   |                    |               |                       |
| 2,710 lbs<br>1,230 kgs | 2,970 lbs<br>1,345 kgs | 3,160 lbs<br>1,435 kgs | 4,020 lbs<br>1,825 kgs | 2,610 lbs<br>1,185 kgs      | 15 psi<br>1.0 bar   |   |                     |                         |                        |   |                    |               |                       |
| 2,950 lbs<br>1,340 kgs | 3,230 lbs<br>1,465 kgs | 3,450 lbs<br>1,565 kgs | 4,380 lbs<br>1,985 kgs | 2,830 lbs<br>1,285 kgs      | 17 psi<br>1.2 bar   |   |                     |                         |                        |   |                    |               |                       |
| 3,190 lbs<br>1,445 kgs | 3,480 lbs<br>1,580 kgs | 3,730 lbs<br>1,690 kgs | 4,730 lbs<br>2,145 kgs | 3,060 lbs<br>1,390 kgs      | 20 psi<br>1.4 bar   |   |                     |                         |                        |   |                    |               |                       |
| 3,420 lbs<br>1,550 kgs | 3,750 lbs<br>1,700 kgs | 4,010 lbs<br>1,820 kgs | 5,090 lbs<br>2,310 kgs | 3,300 lbs<br>1,495 kgs      | 23 psi<br>1.6 bar   |   |                     |                         |                        |   |                    |               |                       |
|                        |                        |                        | 5,450 lbs<br>2,470 kgs |                             | 26 psi<br>1.8 bar   |   |                     |                         |                        |   |                    |               |                       |
|                        |                        |                        | 5,620 lbs<br>2,550 kgs |                             | 28 psi<br>1.9 bar   |   |                     |                         |                        |   |                    |               |                       |

### 16.9 R24 134A8/131B TL AGRIBIB

MSPN: 97341

CAI: 123854

| Load per tire (single) |                        |                        |                        |                             |                     | *All load values are for maximum indicated speeds at low torque.<br>*20 mph (30 km/h): high torque field work or max road speed.<br>*All load values for ground slopes up to 20% (above 20% consult Michelin) |                     |                         |                        |   |                    |               |                       |
|------------------------|------------------------|------------------------|------------------------|-----------------------------|---------------------|---|---------------------|-------------------------|------------------------|---|--------------------|---------------|-----------------------|
| 30 mph<br>50 km/h      | 25 mph<br>40 km/h      | 20 mph<br>30 km/h      | 6 mph<br>10 km/h       | 25 mph Dual<br>40 km/h Dual | Pressure            | Tire Technical Data   |                     |                         |                        | Rims<br>(preferred in bold)<br><b>DW15L</b><br>W14L,<br>DW14L, W15L |                    |               |                       |
|                        |                        |                        |                        |                             | Unloaded Dimensions |   | Loaded Dimensions   |                         | Overall Width          |   | Overall Diameter   | Loaded Radius | Rolling Circumference |
|                        |                        |                        |                        | 1,740 lbs<br>790 kgs        | 6 psi<br>0.4 bar    | 18.1 in<br>460 mm   | 52.4 in<br>1,330 mm | 23.1 in<br>586 mm       |                        | 154.9 in<br>3,935 mm  |                    |               |                       |
|                        |                        | 2,800 lbs<br>1,270 kgs | 3,570 lbs<br>1,620 kgs | 2,200 lbs<br>1,000 kgs      | 7 psi<br>0.5 bar    | Rolling Circumference Index<br>0  |                     |                         |                        | Tube MSPN<br>44140  |                    |               |                       |
|                        |                        | 2,840 lbs<br>1,290 kgs | 3,040 lbs<br>1,380 kgs | 4,140 lbs<br>1,880 kgs      | 9 psi<br>0.6 bar    | Number of Lugs<br>19 x 2  |                     |                         |                        |   | Tube CAI<br>170042 |               |                       |
| 2,840 lbs<br>1,290 kgs | 3,040 lbs<br>1,380 kgs | 3,240 lbs<br>1,470 kgs | 4,140 lbs<br>1,880 kgs | 2,680 lbs<br>1,215 kgs      | 9 psi<br>0.6 bar    | Gross Flat Plate  | Tire Weight         | 100% Tire Volume        | Centerline Tread Depth | Minimum Dual/Triple Spacing   |                    |               |                       |
| 3,130 lbs<br>1,420 kgs | 3,370 lbs<br>1,530 kgs | 3,590 lbs<br>1,630 kgs | 4,590 lbs<br>2,080 kgs | 2,970 lbs<br>1,345 kgs      | 12 psi<br>0.8 bar   | 244 sq in<br>1,575 sq cm  | 205 lbs<br>93 kgs   | 85.8 gals<br>325 liters | 69/32nd<br>55 mm       | 22.3 in<br>566 mm   |                    |               |                       |
| 3,430 lbs<br>1,555 kgs | 3,690 lbs<br>1,675 kgs | 3,950 lbs<br>1,790 kgs | 5,030 lbs<br>2,280 kgs | 3,250 lbs<br>1,475 kgs      | 15 psi<br>1.0 bar   |   |                     |                         |                        |   |                    |               |                       |
| 3,710 lbs<br>1,685 kgs | 4,020 lbs<br>1,825 kgs | 4,300 lbs<br>1,950 kgs | 5,470 lbs<br>2,480 kgs | 3,540 lbs<br>1,605 kgs      | 17 psi<br>1.2 bar   |   |                     |                         |                        |   |                    |               |                       |
| 4,010 lbs<br>1,820 kgs | 4,340 lbs<br>1,970 kgs | 4,650 lbs<br>2,110 kgs | 5,910 lbs<br>2,680 kgs | 3,830 lbs<br>1,735 kgs      | 20 psi<br>1.4 bar   |   |                     |                         |                        |   |                    |               |                       |
| 4,300 lbs<br>1,950 kgs | 4,670 lbs<br>2,120 kgs | 5,000 lbs<br>2,270 kgs | 6,350 lbs<br>2,880 kgs | 4,110 lbs<br>1,865 kgs      | 23 psi<br>1.6 bar   |   |                     |                         |                        |   |                    |               |                       |
|                        |                        |                        | 6,790 lbs<br>3,080 kgs |                             | 26 psi<br>1.8 bar   |   |                     |                         |                        |   |                    |               |                       |
|                        |                        |                        | 7,010 lbs<br>3,180 kgs |                             | 28 psi<br>1.9 bar   |   |                     |                         |                        |   |                    |               |                       |

NOTE:

- When used as duals, tire load carrying capacity must be reduced 12%
- When used as triples, tire load carrying capacity must be reduced 18%



# MICHELIN AGRIBIB

## 12.4 R28 121A8/118B TL AGRIBIB

MSPN: 50465

CAI: 123832

| Load per tire (single) |                   |                   |                  |          | Tire Technical Data         |                  |                   |                        |  |
|------------------------|-------------------|-------------------|------------------|----------|-----------------------------|------------------|-------------------|------------------------|--|
| 30 mph<br>50 km/h      | 25 mph<br>40 km/h | 20 mph<br>30 km/h | 6 mph<br>10 km/h | Pressure | Unloaded Dimensions         |                  | Loaded Dimensions |                        | Rims<br>(preferred in bold)<br><b>W11</b><br>W10 |
|                        |                   |                   |                  |          | Overall Width               | Overall Diameter | Loaded Radius     | Rolling Circumference  |  |
|                        |                   | 1,920 lbs         | 2,450 lbs        | 7 psi    |                             |                  |                   |                        |  |
|                        |                   | 870 kgs           | 1,110 kgs        | 0.5 bar  |                             |                  |                   |                        |  |
| 1,920 lbs              | 2,070 lbs         | 2,230 lbs         | 2,820 lbs        | 9 psi    |                             |                  |                   |                        |  |
| 870 kgs                | 940 kgs           | 1,010 kgs         | 1,280 kgs        | 0.6 bar  |                             |                  |                   |                        |  |
| 2,120 lbs              | 2,290 lbs         | 2,470 lbs         | 3,130 lbs        | 12 psi   |                             |                  |                   |                        |  |
| 960 kgs                | 1,040 kgs         | 1,120 kgs         | 1,420 kgs        | 0.8 bar  |                             |                  |                   |                        |  |
| 2,310 lbs              | 2,520 lbs         | 2,700 lbs         | 3,430 lbs        | 15 psi   |                             |                  |                   |                        |  |
| 1,050 kgs              | 1,145 kgs         | 1,225 kgs         | 1,555 kgs        | 1.0 bar  |                             |                  |                   |                        |  |
| 2,510 lbs              | 2,740 lbs         | 2,940 lbs         | 3,740 lbs        | 17 psi   |                             |                  |                   |                        |  |
| 1,140 kgs              | 1,245 kgs         | 1,335 kgs         | 1,695 kgs        | 1.2 bar  |                             |                  |                   |                        |  |
| 2,710 lbs              | 2,980 lbs         | 3,170 lbs         | 4,050 lbs        | 20 psi   |                             |                  |                   |                        |  |
| 1,230 kgs              | 1,350 kgs         | 1,440 kgs         | 1,835 kgs        | 1.4 bar  |                             |                  |                   |                        |  |
| 2,910 lbs              | 3,200 lbs         | 3,420 lbs         | 4,340 lbs        | 23 psi   |                             |                  |                   |                        |  |
| 1,320 kgs              | 1,450 kgs         | 1,550 kgs         | 1,970 kgs        | 1.6 bar  |                             |                  |                   |                        |  |
|                        |                   |                   | 4,500 lbs        | 25 psi   |                             |                  |                   |                        |  |
|                        |                   |                   | 2,040 kgs        | 1.7 bar  |                             |                  |                   |                        |  |
|                        |                   |                   | 4,650 lbs        | 26 psi   |                             |                  |                   |                        |  |
|                        |                   |                   | 2,110 kgs        | 1.8 bar  |                             |                  |                   |                        |  |
|                        |                   |                   | 4,810 lbs        | 28 psi   |                             |                  |                   |                        |  |
|                        |                   |                   | 2,180 kgs        | 1.9 bar  |                             |                  |                   |                        |  |
|                        |                   |                   |                  |          | Rolling Circumference Index |                  |                   |                        |  |
|                        |                   |                   |                  |          | 0                           |                  |                   |                        | Tube MSPN  |
|                        |                   |                   |                  |          | Number of Lugs              |                  |                   |                        | 53377  |
|                        |                   |                   |                  |          | 20 x 2                      |                  |                   |                        | Tube CAI   |
|                        |                   |                   |                  |          |                             |                  |                   |                        | 170051   |
|                        |                   |                   |                  |          |                             |                  |                   |                        | Minimum Dual/Triple Spacing                      |
|                        |                   |                   |                  |          | Gross Flat Plate            | Tire Weight      | 100% Tire Volume  | Centerline Tread Depth |  |
|                        |                   |                   |                  |          | 161 sq in                   | 130 lbs          | 47.3 gals         | 50/32nd                | 16.9 in  |
|                        |                   |                   |                  |          | 1,041 sq cm                 | 59 kgs           | 179 liters        | 40 mm                  | 429 mm   |

\*All load values are for maximum indicated speeds at low torque.

\*20 mph (30 km/h): high torque field work or max road speed.

\*All load values for ground slopes up to 20% (above 20% consult Michelin)

## 13.6 R28 123A8/120B TL AGRIBIB

MSPN: 87976

CAI: 123782

| Load per tire (single) |                   |                   |                  |                             |          | Tire Technical Data         |                  |                   |                        |  |
|------------------------|-------------------|-------------------|------------------|-----------------------------|----------|-----------------------------|------------------|-------------------|------------------------|--|
| 30 mph<br>50 km/h      | 25 mph<br>40 km/h | 20 mph<br>30 km/h | 6 mph<br>10 km/h | 25 mph Dual<br>40 km/h Dual | Pressure | Unloaded Dimensions         |                  | Loaded Dimensions |                        | Rims<br>(preferred in bold)<br><b>W12</b><br>W11 |
|                        |                   |                   |                  |                             |          | Overall Width               | Overall Diameter | Loaded Radius     | Rolling Circumference  |  |
|                        |                   |                   |                  | 1,300 lbs                   | 6 psi    |                             |                  |                   |                        |  |
|                        |                   |                   |                  | 590 kgs                     | 0.4 bar  |                             |                  |                   |                        |  |
|                        |                   | 2,050 lbs         | 2,620 lbs        | 1,630 lbs                   | 7 psi    |                             |                  |                   |                        |  |
|                        |                   | 930 kgs           | 1,190 kgs        | 740 kgs                     | 0.5 bar  |                             |                  |                   |                        |  |
| 2,030 lbs              | 2,230 lbs         | 2,380 lbs         | 3,020 lbs        | 1,960 lbs                   | 9 psi    |                             |                  |                   |                        |  |
| 920 kgs                | 1,010 kgs         | 1,080 kgs         | 1,370 kgs        | 890 kgs                     | 0.6 bar  |                             |                  |                   |                        |  |
| 2,240 lbs              | 2,470 lbs         | 2,630 lbs         | 3,350 lbs        | 2,170 lbs                   | 12 psi   |                             |                  |                   |                        |  |
| 1,015 kgs              | 1,120 kgs         | 1,195 kgs         | 1,520 kgs        | 985 kgs                     | 0.8 bar  |                             |                  |                   |                        |  |
| 2,450 lbs              | 2,700 lbs         | 2,890 lbs         | 3,670 lbs        | 2,380 lbs                   | 15 psi   |                             |                  |                   |                        |  |
| 1,110 kgs              | 1,225 kgs         | 1,310 kgs         | 1,665 kgs        | 1,080 kgs                   | 1.0 bar  |                             |                  |                   |                        |  |
| 2,670 lbs              | 2,940 lbs         | 3,150 lbs         | 4,000 lbs        | 2,590 lbs                   | 17 psi   |                             |                  |                   |                        |  |
| 1,210 kgs              | 1,335 kgs         | 1,430 kgs         | 1,815 kgs        | 1,175 kgs                   | 1.2 bar  |                             |                  |                   |                        |  |
| 2,880 lbs              | 3,170 lbs         | 3,410 lbs         | 4,320 lbs        | 2,800 lbs                   | 20 psi   |                             |                  |                   |                        |  |
| 1,305 kgs              | 1,440 kgs         | 1,545 kgs         | 1,960 kgs        | 1,270 kgs                   | 1.4 bar  |                             |                  |                   |                        |  |
| 3,090 lbs              | 3,420 lbs         | 3,660 lbs         | 4,650 lbs        | 3,010 lbs                   | 23 psi   |                             |                  |                   |                        |  |
| 1,400 kgs              | 1,550 kgs         | 1,660 kgs         | 2,110 kgs        | 1,365 kgs                   | 1.6 bar  |                             |                  |                   |                        |  |
|                        |                   |                   | 4,970 lbs        |                             | 26 psi   |                             |                  |                   |                        |  |
|                        |                   |                   | 2,255 kgs        |                             | 1.8 bar  |                             |                  |                   |                        |  |
|                        |                   |                   | 5,140 lbs        |                             | 28 psi   |                             |                  |                   |                        |  |
|                        |                   |                   | 2,330 kgs        |                             | 1.9 bar  |                             |                  |                   |                        |  |
|                        |                   |                   |                  |                             |          | Rolling Circumference Index |                  |                   |                        |  |
|                        |                   |                   |                  |                             |          | 39                          |                  |                   |                        | Tube MSPN  |
|                        |                   |                   |                  |                             |          | Number of Lugs              |                  |                   |                        | 51627  |
|                        |                   |                   |                  |                             |          | 20 x 2                      |                  |                   |                        | Tube CAI   |
|                        |                   |                   |                  |                             |          |                             |                  |                   |                        | 170053   |
|                        |                   |                   |                  |                             |          |                             |                  |                   |                        | Minimum Dual/Triple Spacing                      |
|                        |                   |                   |                  |                             |          | Gross Flat Plate            | Tire Weight      | 100% Tire Volume  | Centerline Tread Depth |  |
|                        |                   |                   |                  |                             |          | 182 sq in                   | 148 lbs          | 60.7 gals         | 58/32nd                | 18.3 in  |
|                        |                   |                   |                  |                             |          | 1,172 sq cm                 | 67 kgs           | 230 liters        | 46 mm                  | 465 mm   |

\*All load values are for maximum indicated speeds at low torque.

\*20 mph (30 km/h): high torque field work or max road speed.

\*All load values for ground slopes up to 20% (above 20% consult Michelin)

## NOTE:

- When used as duals, tire load carrying capacity must be reduced 12%
- When used as triples, tire load carrying capacity must be reduced 18%





### 14.9 R28 128A8/125B TL AGRIBIB

MSPN: 47219

CAI: 123850

| Load per tire (single) |                   |                   |                  |                             |          |
|------------------------|-------------------|-------------------|------------------|-----------------------------|----------|
| 30 mph<br>50 km/h      | 25 mph<br>40 km/h | 20 mph<br>30 km/h | 6 mph<br>10 km/h | 25 mph Dual<br>40 km/h Dual | Pressure |
|                        |                   |                   |                  | 1,550 lbs                   | 6 psi    |
|                        |                   |                   |                  | 705 kgs                     | 0.4 bar  |
|                        |                   | 2,380 lbs         | 3,040 lbs        | 1,920 lbs                   | 7 psi    |
|                        |                   | 1,080 kgs         | 1,380 kgs        | 870 kgs                     | 0.5 bar  |
| 2,400 lbs              | 2,580 lbs         | 2,760 lbs         | 3,510 lbs        | 2,270 lbs                   | 9 psi    |
| 1,090 kgs              | 1,170 kgs         | 1,250 kgs         | 1,590 kgs        | 1,030 kgs                   | 0.6 bar  |
| 2,650 lbs              | 2,850 lbs         | 3,050 lbs         | 3,880 lbs        | 2,510 lbs                   | 12 psi   |
| 1,200 kgs              | 1,295 kgs         | 1,385 kgs         | 1,760 kgs        | 1,140 kgs                   | 0.8 bar  |
| 2,900 lbs              | 3,130 lbs         | 3,350 lbs         | 4,250 lbs        | 2,760 lbs                   | 15 psi   |
| 1,315 kgs              | 1,420 kgs         | 1,520 kgs         | 1,930 kgs        | 1,250 kgs                   | 1.0 bar  |
| 3,140 lbs              | 3,420 lbs         | 3,660 lbs         | 4,630 lbs        | 3,010 lbs                   | 17 psi   |
| 1,425 kgs              | 1,550 kgs         | 1,660 kgs         | 2,100 kgs        | 1,365 kgs                   | 1.2 bar  |
| 3,400 lbs              | 3,690 lbs         | 3,960 lbs         | 5,020 lbs        | 3,250 lbs                   | 20 psi   |
| 1,540 kgs              | 1,675 kgs         | 1,795 kgs         | 2,275 kgs        | 1,475 kgs                   | 1.4 bar  |
| 3,640 lbs              | 3,970 lbs         | 4,250 lbs         | 5,390 lbs        | 3,490 lbs                   | 23 psi   |
| 1,650 kgs              | 1,800 kgs         | 1,930 kgs         | 2,445 kgs        | 1,585 kgs                   | 1.6 bar  |
|                        |                   |                   | 5,770 lbs        |                             | 26 psi   |
|                        |                   |                   | 2,615 kgs        |                             | 1.8 bar  |
|                        |                   |                   | 5,950 lbs        |                             | 28 psi   |
|                        |                   |                   | 2,700 kgs        |                             | 1.9 bar  |

\*All load values are for maximum indicated speeds at low torque.  
**\*20 mph (30 km/h): high torque field work or max road speed.**  
 \*All load values for ground slopes up to 20% (above 20% consult Michelin)

| Tire Technical Data   |                  |                   |                        |                             |                             |             |                  |                        |                             |           |         |           |         |         |             |        |            |       |        |
|---|------------------|-------------------|------------------------|-----------------------------|-----------------------------|-------------|------------------|------------------------|-----------------------------|-----------|---------|-----------|---------|---------|-------------|--------|------------|-------|--------|
| Unloaded Dimensions   |                  | Loaded Dimensions |                        | Rims<br>(preferred in bold) |                             |             |                  |                        |                             |           |         |           |         |         |             |        |            |       |        |
| Overall Width   | Overall Diameter | Loaded Radius     | Rolling Circumference  |                             |                             |             |                  |                        |                             |           |         |           |         |         |             |        |            |       |        |
| 15.9 in   | 53.5 in          | 24.1 in           | 159.4 in               | <b>W13</b><br>W12           |                             |             |                  |                        |                             |           |         |           |         |         |             |        |            |       |        |
| 403 mm  | 1,358 mm         | 612 mm            | 4,050 mm               |                             |                             |             |                  |                        |                             |           |         |           |         |         |             |        |            |       |        |
| <table border="1"> <tr><td>Rolling Circumference Index</td></tr> <tr><td>40</td></tr> <tr><td>Number of Lugs</td></tr> <tr><td>20 x 2</td></tr> </table>  |                  |                   |                        |                             | Rolling Circumference Index | 40          | Number of Lugs   | 20 x 2                 |                             |           |         |           |         |         |             |        |            |       |        |
| Rolling Circumference Index   |                  |                   |                        |                             |                             |             |                  |                        |                             |           |         |           |         |         |             |        |            |       |        |
| 40  |                  |                   |                        |                             |                             |             |                  |                        |                             |           |         |           |         |         |             |        |            |       |        |
| Number of Lugs  |                  |                   |                        |                             |                             |             |                  |                        |                             |           |         |           |         |         |             |        |            |       |        |
| 20 x 2  |                  |                   |                        |                             |                             |             |                  |                        |                             |           |         |           |         |         |             |        |            |       |        |
| <table border="1"> <tr><td>Gross Flat Plate</td><td>Tire Weight</td><td>100% Tire Volume</td><td>Centerline Tread Depth</td><td>Minimum Dual/Triple Spacing</td></tr> <tr><td>206 sq in</td><td>175 lbs</td><td>74.0 gals</td><td>59/32nd</td><td>19.8 in</td></tr> <tr><td>1,332 sq cm</td><td>80 kgs</td><td>280 liters</td><td>47 mm</td><td>504 mm</td></tr> </table> |                  |                   |                        |                             | Gross Flat Plate            | Tire Weight | 100% Tire Volume | Centerline Tread Depth | Minimum Dual/Triple Spacing | 206 sq in | 175 lbs | 74.0 gals | 59/32nd | 19.8 in | 1,332 sq cm | 80 kgs | 280 liters | 47 mm | 504 mm |
| Gross Flat Plate  | Tire Weight      | 100% Tire Volume  | Centerline Tread Depth | Minimum Dual/Triple Spacing |                             |             |                  |                        |                             |           |         |           |         |         |             |        |            |       |        |
| 206 sq in   | 175 lbs          | 74.0 gals         | 59/32nd                | 19.8 in                     |                             |             |                  |                        |                             |           |         |           |         |         |             |        |            |       |        |
| 1,332 sq cm   | 80 kgs           | 280 liters        | 47 mm                  | 504 mm                      |                             |             |                  |                        |                             |           |         |           |         |         |             |        |            |       |        |

### 16.9 R28 136A8/133B TL AGRIBIB

MSPN: 86531

CAI: 123856

| Load per tire (single) |                   |                   |                  |                             |          |
|------------------------|-------------------|-------------------|------------------|-----------------------------|----------|
| 30 mph<br>50 km/h      | 25 mph<br>40 km/h | 20 mph<br>30 km/h | 6 mph<br>10 km/h | 25 mph Dual<br>40 km/h Dual | Pressure |
|                        |                   |                   |                  | 1,900 lbs                   | 6 psi    |
|                        |                   |                   |                  | 860 kgs                     | 0.4 bar  |
|                        |                   | 2,950 lbs         | 3,770 lbs        | 2,360 lbs                   | 7 psi    |
|                        |                   | 1,340 kgs         | 1,710 kgs        | 1,070 kgs                   | 0.5 bar  |
| 3,000 lbs              | 3,220 lbs         | 3,440 lbs         | 4,370 lbs        | 2,830 lbs                   | 9 psi    |
| 1,360 kgs              | 1,460 kgs         | 1,560 kgs         | 1,980 kgs        | 1,285 kgs                   | 0.6 bar  |
| 3,310 lbs              | 3,560 lbs         | 3,810 lbs         | 4,830 lbs        | 3,130 lbs                   | 12 psi   |
| 1,500 kgs              | 1,615 kgs         | 1,730 kgs         | 2,190 kgs        | 1,420 kgs                   | 0.8 bar  |
| 3,620 lbs              | 3,900 lbs         | 4,180 lbs         | 5,300 lbs        | 3,440 lbs                   | 15 psi   |
| 1,640 kgs              | 1,770 kgs         | 1,895 kgs         | 2,405 kgs        | 1,560 kgs                   | 1.0 bar  |
| 3,920 lbs              | 4,250 lbs         | 4,550 lbs         | 5,770 lbs        | 3,740 lbs                   | 17 psi   |
| 1,780 kgs              | 1,930 kgs         | 2,065 kgs         | 2,615 kgs        | 1,695 kgs                   | 1.2 bar  |
| 4,230 lbs              | 4,600 lbs         | 4,920 lbs         | 6,240 lbs        | 4,050 lbs                   | 20 psi   |
| 1,920 kgs              | 2,085 kgs         | 2,230 kgs         | 2,830 kgs        | 1,835 kgs                   | 1.4 bar  |
| 4,540 lbs              | 4,940 lbs         | 5,290 lbs         | 6,700 lbs        | 4,340 lbs                   | 23 psi   |
| 2,060 kgs              | 2,240 kgs         | 2,400 kgs         | 3,040 kgs        | 1,970 kgs                   | 1.6 bar  |
|                        |                   |                   | 7,180 lbs        |                             | 26 psi   |
|                        |                   |                   | 3,255 kgs        |                             | 1.8 bar  |
|                        |                   |                   | 7,410 lbs        |                             | 28 psi   |
|                        |                   |                   | 3,360 kgs        |                             | 1.9 bar  |

\*All load values are for maximum indicated speeds at low torque.  
**\*20 mph (30 km/h): high torque field work or max road speed.**  
 \*All load values for ground slopes up to 20% (above 20% consult Michelin)

| Tire Technical Data  |                  |                   |                        |                                      |                             |             |                  |                        |                             |           |         |           |         |         |             |         |            |       |        |
|--|------------------|-------------------|------------------------|--------------------------------------|-----------------------------|-------------|------------------|------------------------|-----------------------------|-----------|---------|-----------|---------|---------|-------------|---------|------------|-------|--------|
| Unloaded Dimensions  |                  | Loaded Dimensions |                        | Rims<br>(preferred in bold)          |                             |             |                  |                        |                             |           |         |           |         |         |             |         |            |       |        |
| Overall Width  | Overall Diameter | Loaded Radius     | Rolling Circumference  |                                      |                             |             |                  |                        |                             |           |         |           |         |         |             |         |            |       |        |
| 17.7 in  | 56.2 in          | 25.2 in           | 166.9 in               | <b>DW15L</b><br>W14L,<br>DW14L, W15L |                             |             |                  |                        |                             |           |         |           |         |         |             |         |            |       |        |
| 450 mm   | 1,427 mm         | 641 mm            | 4,240 mm               |                                      |                             |             |                  |                        |                             |           |         |           |         |         |             |         |            |       |        |
| <table border="1"> <tr><td>Rolling Circumference Index</td></tr> <tr><td>41</td></tr> <tr><td>Number of Lugs</td></tr> <tr><td>20 x 2</td></tr> </table>   |                  |                   |                        |                                      | Rolling Circumference Index | 41          | Number of Lugs   | 20 x 2                 |                             |           |         |           |         |         |             |         |            |       |        |
| Rolling Circumference Index  |                  |                   |                        |                                      |                             |             |                  |                        |                             |           |         |           |         |         |             |         |            |       |        |
| 41   |                  |                   |                        |                                      |                             |             |                  |                        |                             |           |         |           |         |         |             |         |            |       |        |
| Number of Lugs   |                  |                   |                        |                                      |                             |             |                  |                        |                             |           |         |           |         |         |             |         |            |       |        |
| 20 x 2   |                  |                   |                        |                                      |                             |             |                  |                        |                             |           |         |           |         |         |             |         |            |       |        |
| <table border="1"> <tr><td>Gross Flat Plate</td><td>Tire Weight</td><td>100% Tire Volume</td><td>Centerline Tread Depth</td><td>Minimum Dual/Triple Spacing</td></tr> <tr><td>262 sq in</td><td>220 lbs</td><td>95.6 gals</td><td>64/32nd</td><td>22.3 in</td></tr> <tr><td>1,690 sq cm</td><td>100 kgs</td><td>362 liters</td><td>51 mm</td><td>566 mm</td></tr> </table> |                  |                   |                        |                                      | Gross Flat Plate            | Tire Weight | 100% Tire Volume | Centerline Tread Depth | Minimum Dual/Triple Spacing | 262 sq in | 220 lbs | 95.6 gals | 64/32nd | 22.3 in | 1,690 sq cm | 100 kgs | 362 liters | 51 mm | 566 mm |
| Gross Flat Plate   | Tire Weight      | 100% Tire Volume  | Centerline Tread Depth | Minimum Dual/Triple Spacing          |                             |             |                  |                        |                             |           |         |           |         |         |             |         |            |       |        |
| 262 sq in  | 220 lbs          | 95.6 gals         | 64/32nd                | 22.3 in                              |                             |             |                  |                        |                             |           |         |           |         |         |             |         |            |       |        |
| 1,690 sq cm  | 100 kgs          | 362 liters        | 51 mm                  | 566 mm                               |                             |             |                  |                        |                             |           |         |           |         |         |             |         |            |       |        |

NOTE:

- When used as duals, tire load carrying capacity must be reduced 12%
- When used as triples, tire load carrying capacity must be reduced 18%



# MICHELIN AGRIBIB

## 16.9 R30 137A8/134B TL AGRIBIB

MSPN: 41545

CAI: 123870

| Load per tire (single)      |                        |                          |                           |                             |                   | Tire Technical Data   |                     |                   |                          |                                      |                |                     |                           |                                   |                          |                   |                          |                  |                   |
|-----------------------------|------------------------|--------------------------|---------------------------|-----------------------------|-------------------|---|---------------------|-------------------|--------------------------|--------------------------------------|----------------|---------------------|---------------------------|-----------------------------------|--------------------------|-------------------|--------------------------|------------------|-------------------|
| 30 mph<br>50 km/h           | 25 mph<br>40 km/h      | 20 mph<br>30 km/h        | 6 mph<br>10 km/h          | 25 mph Dual<br>40 km/h Dual | Pressure          | Unloaded Dimensions   |                     | Loaded Dimensions |                          | Rims<br>(preferred in<br>bold)       |                |                     |                           |                                   |                          |                   |                          |                  |                   |
|                             |                        |                          |                           |                             |                   | Overall<br>Width  | Overall<br>Diameter | Loaded<br>Radius  | Rolling<br>Circumference |                                      |                |                     |                           |                                   |                          |                   |                          |                  |                   |
|                             |                        |                          |                           | 1,940 lbs<br>880 kgs        | 6 psi<br>0.4 bar  |   |                     |                   |                          | <b>DW15L</b><br>W14L,<br>DW14L, W15L |                |                     |                           |                                   |                          |                   |                          |                  |                   |
|                             |                        | 3,040 lbs<br>1,380 kgs   | 3,880 lbs<br>1,760 kgs    | 2,430 lbs<br>1,100 kgs      | 7 psi<br>0.5 bar  | 17.6 in<br>447 mm   | 58.3 in<br>1,480 mm | 26.1 in<br>664 mm | 173.0 in<br>4,395 mm     |                                      |                |                     |                           |                                   |                          |                   |                          |                  |                   |
| 3,090 lbs<br>1,400 kgs      | 3,310 lbs<br>1,500 kgs | 3,530 lbs<br>1,600 kgs   | 4,500 lbs<br>2,040 kgs    | 2,910 lbs<br>1,320 kgs      | 9 psi<br>0.6 bar  | <table border="1"> <tr> <td>Rolling Circumference Index</td> </tr> <tr> <td>42</td> </tr> <tr> <td>Number of Lugs</td> </tr> <tr> <td>19 x 2</td> </tr> </table>  |                     |                   |                          | Rolling Circumference Index          | 42             | Number of Lugs      | 19 x 2                    | Minimum<br>Dual/Triple<br>Spacing |                          |                   |                          |                  |                   |
| Rolling Circumference Index |                        |                          |                           |                             |                   |   |                     |                   |                          |                                      |                |                     |                           |                                   |                          |                   |                          |                  |                   |
| 42                          |                        |                          |                           |                             |                   |   |                     |                   |                          |                                      |                |                     |                           |                                   |                          |                   |                          |                  |                   |
| Number of Lugs              |                        |                          |                           |                             |                   |   |                     |                   |                          |                                      |                |                     |                           |                                   |                          |                   |                          |                  |                   |
| 19 x 2                      |                        |                          |                           |                             |                   |   |                     |                   |                          |                                      |                |                     |                           |                                   |                          |                   |                          |                  |                   |
| 3,410 lbs<br>1,545 kgs      | 3,660 lbs<br>1,660 kgs | 3,900 lbs<br>1,770 kgs   | 4,970 lbs<br>2,255 kgs    | 3,220 lbs<br>1,460 kgs      | 12 psi<br>0.8 bar |   |                     |                   |                          |                                      |                |                     |                           |                                   |                          |                   |                          |                  |                   |
| 3,730 lbs<br>1,690 kgs      | 4,010 lbs<br>1,820 kgs | 4,290 lbs<br>1,945 kgs   | 5,460 lbs<br>2,475 kgs    | 3,530 lbs<br>1,600 kgs      | 15 psi<br>1.0 bar | <table border="1"> <tr> <td>Gross<br/>Flat Plate</td> <td>Tire<br/>Weight</td> <td>100% Tire<br/>Volume</td> <td>Centerline<br/>Tread Depth</td> <td></td> </tr> <tr> <td>267 sq in<br/>1,724 sq cm</td> <td>217 lbs<br/>98 kgs</td> <td>100.4 gals<br/>380 liters</td> <td>62/32nd<br/>49 mm</td> <td>22.3 in<br/>566 mm</td> </tr> </table> |                     |                   |                          | Gross<br>Flat Plate                  | Tire<br>Weight | 100% Tire<br>Volume | Centerline<br>Tread Depth |                                   | 267 sq in<br>1,724 sq cm | 217 lbs<br>98 kgs | 100.4 gals<br>380 liters | 62/32nd<br>49 mm | 22.3 in<br>566 mm |
| Gross<br>Flat Plate         | Tire<br>Weight         | 100% Tire<br>Volume      | Centerline<br>Tread Depth |                             |                   |   |                     |                   |                          |                                      |                |                     |                           |                                   |                          |                   |                          |                  |                   |
| 267 sq in<br>1,724 sq cm    | 217 lbs<br>98 kgs      | 100.4 gals<br>380 liters | 62/32nd<br>49 mm          | 22.3 in<br>566 mm           |                   |   |                     |                   |                          |                                      |                |                     |                           |                                   |                          |                   |                          |                  |                   |
| 4,030 lbs<br>1,830 kgs      | 4,370 lbs<br>1,980 kgs | 4,660 lbs<br>2,115 kgs   | 5,930 lbs<br>2,690 kgs    | 3,850 lbs<br>1,745 kgs      | 17 psi<br>1.2 bar |   |                     |                   |                          |                                      |                |                     |                           |                                   |                          |                   |                          |                  |                   |
| 4,350 lbs<br>1,975 kgs      | 4,720 lbs<br>2,140 kgs | 5,050 lbs<br>2,290 kgs   | 6,420 lbs<br>2,910 kgs    | 4,160 lbs<br>1,885 kgs      | 20 psi<br>1.4 bar |   |                     |                   |                          |                                      |                |                     |                           |                                   |                          |                   |                          |                  |                   |
| 4,670 lbs<br>2,120 kgs      | 5,070 lbs<br>2,300 kgs | 5,420 lbs<br>2,460 kgs   | 6,890 lbs<br>3,125 kgs    | 4,460 lbs<br>2,025 kgs      | 23 psi<br>1.6 bar |   |                     |                   |                          |                                      |                |                     |                           |                                   |                          |                   |                          |                  |                   |
|                             |                        |                          | 7,360 lbs<br>3,340 kgs    |                             | 26 psi<br>1.8 bar |   |                     |                   |                          |                                      |                |                     |                           |                                   |                          |                   |                          |                  |                   |
|                             |                        |                          | 7,610 lbs<br>3,450 kgs    |                             | 28 psi<br>1.9 bar |   |                     |                   |                          |                                      |                |                     |                           |                                   |                          |                   |                          |                  |                   |

\*All load values are for maximum indicated speeds at low torque.

\*20 mph (30 km/h): high torque field work or max road speed.

\*All load values for ground slopes up to 20% (above 20% consult Michelin)

## 18.4 R30 142A8/139B TL AGRIBIB

MSPN: 42060

CAI: 123844

| Load per tire (single)      |                        |                          |                           |                             |                   | Tire Technical Data  |                     |                   |                          |                                      |                |                     |                           |                                   |                          |                    |                          |                  |                   |
|-----------------------------|------------------------|--------------------------|---------------------------|-----------------------------|-------------------|--|---------------------|-------------------|--------------------------|--------------------------------------|----------------|---------------------|---------------------------|-----------------------------------|--------------------------|--------------------|--------------------------|------------------|-------------------|
| 30 mph<br>50 km/h           | 25 mph<br>40 km/h      | 20 mph<br>30 km/h        | 6 mph<br>10 km/h          | 25 mph Dual<br>40 km/h Dual | Pressure          | Unloaded Dimensions  |                     | Loaded Dimensions |                          | Rims<br>(preferred in<br>bold)       |                |                     |                           |                                   |                          |                    |                          |                  |                   |
|                             |                        |                          |                           |                             |                   | Overall<br>Width   | Overall<br>Diameter | Loaded<br>Radius  | Rolling<br>Circumference |                                      |                |                     |                           |                                   |                          |                    |                          |                  |                   |
|                             |                        |                          |                           | 2,290 lbs<br>1,040 kgs      | 6 psi<br>0.4 bar  |  |                     |                   |                          | <b>DW16L</b><br>W15L,<br>DW15L, W16L |                |                     |                           |                                   |                          |                    |                          |                  |                   |
|                             |                        | 3,510 lbs<br>1,590 kgs   | 4,480 lbs<br>2,030 kgs    | 2,820 lbs<br>1,280 kgs      | 7 psi<br>0.5 bar  | 19.8 in<br>504 mm  | 61.0 in<br>1,550 mm | 27.3 in<br>695 mm | 181.2 in<br>4,602 mm     |                                      |                |                     |                           |                                   |                          |                    |                          |                  |                   |
| 3,530 lbs<br>1,600 kgs      | 3,790 lbs<br>1,720 kgs | 4,060 lbs<br>1,840 kgs   | 5,180 lbs<br>2,350 kgs    | 3,340 lbs<br>1,515 kgs      | 9 psi<br>0.6 bar  | <table border="1"> <tr> <td>Rolling Circumference Index</td> </tr> <tr> <td>0</td> </tr> <tr> <td>Number of Lugs</td> </tr> <tr> <td>19 x 2</td> </tr> </table>  |                     |                   |                          | Rolling Circumference Index          | 0              | Number of Lugs      | 19 x 2                    | Minimum<br>Dual/Triple<br>Spacing |                          |                    |                          |                  |                   |
| Rolling Circumference Index |                        |                          |                           |                             |                   |  |                     |                   |                          |                                      |                |                     |                           |                                   |                          |                    |                          |                  |                   |
| 0                           |                        |                          |                           |                             |                   |  |                     |                   |                          |                                      |                |                     |                           |                                   |                          |                    |                          |                  |                   |
| Number of Lugs              |                        |                          |                           |                             |                   |  |                     |                   |                          |                                      |                |                     |                           |                                   |                          |                    |                          |                  |                   |
| 19 x 2                      |                        |                          |                           |                             |                   |  |                     |                   |                          |                                      |                |                     |                           |                                   |                          |                    |                          |                  |                   |
| 3,890 lbs<br>1,765 kgs      | 4,200 lbs<br>1,905 kgs | 4,500 lbs<br>2,040 kgs   | 5,730 lbs<br>2,600 kgs    | 3,700 lbs<br>1,680 kgs      | 12 psi<br>0.8 bar |  |                     |                   |                          |                                      |                |                     |                           |                                   |                          |                    |                          |                  |                   |
| 4,250 lbs<br>1,930 kgs      | 4,610 lbs<br>2,090 kgs | 4,940 lbs<br>2,240 kgs   | 6,280 lbs<br>2,850 kgs    | 4,060 lbs<br>1,840 kgs      | 15 psi<br>1.0 bar | <table border="1"> <tr> <td>Gross<br/>Flat Plate</td> <td>Tire<br/>Weight</td> <td>100% Tire<br/>Volume</td> <td>Centerline<br/>Tread Depth</td> <td></td> </tr> <tr> <td>310 sq in<br/>2,003 sq cm</td> <td>255 lbs<br/>116 kgs</td> <td>124.1 gals<br/>470 liters</td> <td>68/32nd<br/>54 mm</td> <td>24.1 in<br/>611 mm</td> </tr> </table> |                     |                   |                          | Gross<br>Flat Plate                  | Tire<br>Weight | 100% Tire<br>Volume | Centerline<br>Tread Depth |                                   | 310 sq in<br>2,003 sq cm | 255 lbs<br>116 kgs | 124.1 gals<br>470 liters | 68/32nd<br>54 mm | 24.1 in<br>611 mm |
| Gross<br>Flat Plate         | Tire<br>Weight         | 100% Tire<br>Volume      | Centerline<br>Tread Depth |                             |                   |  |                     |                   |                          |                                      |                |                     |                           |                                   |                          |                    |                          |                  |                   |
| 310 sq in<br>2,003 sq cm    | 255 lbs<br>116 kgs     | 124.1 gals<br>470 liters | 68/32nd<br>54 mm          | 24.1 in<br>611 mm           |                   |  |                     |                   |                          |                                      |                |                     |                           |                                   |                          |                    |                          |                  |                   |
| 4,630 lbs<br>2,100 kgs      | 5,030 lbs<br>2,280 kgs | 5,380 lbs<br>2,440 kgs   | 6,830 lbs<br>3,100 kgs    | 4,420 lbs<br>2,005 kgs      | 17 psi<br>1.2 bar |  |                     |                   |                          |                                      |                |                     |                           |                                   |                          |                    |                          |                  |                   |
| 4,990 lbs<br>2,265 kgs      | 5,430 lbs<br>2,465 kgs | 5,820 lbs<br>2,640 kgs   | 7,400 lbs<br>3,355 kgs    | 4,770 lbs<br>2,165 kgs      | 20 psi<br>1.4 bar |  |                     |                   |                          |                                      |                |                     |                           |                                   |                          |                    |                          |                  |                   |
| 5,360 lbs<br>2,430 kgs      | 5,840 lbs<br>2,650 kgs | 6,260 lbs<br>2,840 kgs   | 7,950 lbs<br>3,605 kgs    | 5,140 lbs<br>2,330 kgs      | 23 psi<br>1.6 bar |  |                     |                   |                          |                                      |                |                     |                           |                                   |                          |                    |                          |                  |                   |
|                             |                        |                          | 8,500 lbs<br>3,855 kgs    |                             | 26 psi<br>1.8 bar |  |                     |                   |                          |                                      |                |                     |                           |                                   |                          |                    |                          |                  |                   |
|                             |                        |                          | 8,770 lbs<br>3,980 kgs    |                             | 28 psi<br>1.9 bar |  |                     |                   |                          |                                      |                |                     |                           |                                   |                          |                    |                          |                  |                   |

\*All load values are for maximum indicated speeds at low torque.

\*20 mph (30 km/h): high torque field work or max road speed.

\*All load values for ground slopes up to 20% (above 20% consult Michelin)

## NOTE:

- When used as duals, tire load carrying capacity must be reduced 12%
- When used as triples, tire load carrying capacity must be reduced 18%





### 380/85 R30 135A8/135B TL AGRIBIB

MSPN: 18784

CAI: 836509

| Load per tire (single) |                   |                   |                  |                             |          |
|------------------------|-------------------|-------------------|------------------|-----------------------------|----------|
| 30 mph<br>50 km/h      | 25 mph<br>40 km/h | 20 mph<br>30 km/h | 6 mph<br>10 km/h | 25 mph Dual<br>40 km/h Dual | Pressure |
|                        |                   | 2,340 lbs         | 3,200 lbs        | 1,900 lbs                   | 6 psi    |
|                        |                   | 1,060 kgs         | 1,450 kgs        | 860 kgs                     | 0.4 bar  |
| 2,600 lbs              | 2,600 lbs         | 2,760 lbs         | 3,700 lbs        | 2,290 lbs                   | 9 psi    |
| 1,180 kgs              | 1,180 kgs         | 1,250 kgs         | 1,680 kgs        | 1,040 kgs                   | 0.6 bar  |
| 3,000 lbs              | 3,000 lbs         | 3,200 lbs         | 4,200 lbs        | 2,630 lbs                   | 12 psi   |
| 1,360 kgs              | 1,360 kgs         | 1,450 kgs         | 1,905 kgs        | 1,195 kgs                   | 0.8 bar  |
| 3,420 lbs              | 3,430 lbs         | 3,690 lbs         | 4,700 lbs        | 3,020 lbs                   | 15 psi   |
| 1,550 kgs              | 1,555 kgs         | 1,675 kgs         | 2,130 kgs        | 1,370 kgs                   | 1.0 bar  |
| 3,860 lbs              | 3,860 lbs         | 4,190 lbs         | 5,200 lbs        | 3,400 lbs                   | 17 psi   |
| 1,750 kgs              | 1,750 kgs         | 1,900 kgs         | 2,360 kgs        | 1,540 kgs                   | 1.2 bar  |
| 4,330 lbs              | 4,330 lbs         | 4,630 lbs         | 5,690 lbs        | 3,810 lbs                   | 20 psi   |
| 1,965 kgs              | 1,965 kgs         | 2,100 kgs         | 2,580 kgs        | 1,730 kgs                   | 1.4 bar  |
| 4,810 lbs              | 4,810 lbs         | 5,070 lbs         | 6,170 lbs        | 4,230 lbs                   | 23 psi   |
| 2,180 kgs              | 2,180 kgs         | 2,300 kgs         | 2,800 kgs        | 1,920 kgs                   | 1.6 bar  |
|                        |                   |                   | 6,500 lbs        |                             | 25 psi   |
|                        |                   |                   | 2,950 kgs        |                             | 1.7 bar  |
|                        |                   |                   | 6,830 lbs        |                             | 26 psi   |
|                        |                   |                   | 3,100 kgs        |                             | 1.8 bar  |
|                        |                   |                   | 7,170 lbs        |                             | 28 psi   |
|                        |                   |                   | 3,250 kgs        |                             | 1.9 bar  |

\*All load values are for maximum indicated speeds at low torque.  
**\*20 mph (30 km/h): high torque field work or max road speed.**  
 \*All load values for ground slopes up to 20% (above 20% consult Michelin)

| Tire Technical Data  |                  |                   |                        |                             |  |    |  |                |  |        |  |                    |
|--|------------------|-------------------|------------------------|-----------------------------|--|----|--|----------------|--|--------|--|--------------------|
| Unloaded Dimensions  |                  | Loaded Dimensions |                        | Rims<br>(preferred in bold) |  |    |  |                |  |        |  |                    |
| Overall Width  | Overall Diameter | Loaded Radius     | Rolling Circumference  |                             |  |    |  |                |  |        |  |                    |
| 15.2 in  | 55.7 in          | 24.7 in           | 165.1 in               | <b>W12</b><br>W13           |  |    |  |                |  |        |  |                    |
| 386 mm   | 1,416 mm         | 628 mm            | 4,194 mm               |                             |  |    |  |                |  |        |  |                    |
| <table border="1"> <tr><th colspan="2">Rolling Circumference Index</th></tr> <tr><td colspan="2">41</td></tr> <tr><th colspan="2">Number of Lugs</th></tr> <tr><td colspan="2">22 x 2</td></tr> </table> |                  |                   |                        | Rolling Circumference Index |  | 41 |  | Number of Lugs |  | 22 x 2 |  | Tube MSPN<br>47204 |
| Rolling Circumference Index  |                  |                   |                        |                             |  |    |  |                |  |        |  |                    |
| 41   |                  |                   |                        |                             |  |    |  |                |  |        |  |                    |
| Number of Lugs   |                  |                   |                        |                             |  |    |  |                |  |        |  |                    |
| 22 x 2   |                  |                   |                        |                             |  |    |  |                |  |        |  |                    |
|  |                  |                   |                        | Tube CAI<br>170054          |  |    |  |                |  |        |  |                    |
|  |                  |                   |                        | Minimum Dual/Triple Spacing |  |    |  |                |  |        |  |                    |
| Gross Flat Plate   | Tire Weight      | 100% Tire Volume  | Centerline Tread Depth | 20.4 in                     |  |    |  |                |  |        |  |                    |
| 241 sq in  | 177 lbs          | 73.7 gals         | 58/32nd                | 519 mm                      |  |    |  |                |  |        |  |                    |
| 1,556 sq cm  | 80 kgs           | 279 liters        | 46 mm                  |                             |  |    |  |                |  |        |  |                    |

### 320/85 R34 133A8/130B TL AGRIBIB

MSPN: 73532

CAI: 122760

| Load per tire (single) |                   |                   |                  |                             |          |
|------------------------|-------------------|-------------------|------------------|-----------------------------|----------|
| 30 mph<br>50 km/h      | 25 mph<br>40 km/h | 20 mph<br>30 km/h | 6 mph<br>10 km/h | 25 mph Dual<br>40 km/h Dual | Pressure |
|                        |                   | 1,870 lbs         | 2,680 lbs        | 1,550 lbs                   | 6 psi    |
|                        |                   | 850 kgs           | 1,215 kgs        | 705 kgs                     | 0.4 bar  |
| 1,980 lbs              | 2,150 lbs         | 2,270 lbs         | 3,110 lbs        | 1,900 lbs                   | 9 psi    |
| 900 kgs                | 975 kgs           | 1,030 kgs         | 1,410 kgs        | 860 kgs                     | 0.6 bar  |
| 2,270 lbs              | 2,470 lbs         | 2,680 lbs         | 3,550 lbs        | 2,170 lbs                   | 12 psi   |
| 1,030 kgs              | 1,120 kgs         | 1,215 kgs         | 1,610 kgs        | 985 kgs                     | 0.8 bar  |
| 2,910 lbs              | 3,200 lbs         | 3,420 lbs         | 4,410 lbs        | 2,810 lbs                   | 17 psi   |
| 1,320 kgs              | 1,450 kgs         | 1,550 kgs         | 2,000 kgs        | 1,275 kgs                   | 1.2 bar  |
| 3,530 lbs              | 3,860 lbs         | 4,190 lbs         | 5,360 lbs        | 3,400 lbs                   | 23 psi   |
| 1,600 kgs              | 1,750 kgs         | 1,900 kgs         | 2,430 kgs        | 1,540 kgs                   | 1.6 bar  |
| 3,970 lbs              | 4,300 lbs         | 4,540 lbs         | 6,170 lbs        | 3,780 lbs                   | 29 psi   |
| 1,800 kgs              | 1,950 kgs         | 2,060 kgs         | 2,800 kgs        | 1,715 kgs                   | 2.0 bar  |
| 4,080 lbs              | 4,420 lbs         | 4,670 lbs         | 6,330 lbs        | 3,890 lbs                   | 32 psi   |
| 1,850 kgs              | 2,005 kgs         | 2,120 kgs         | 2,870 kgs        | 1,765 kgs                   | 2.2 bar  |
| 4,190 lbs              | 4,540 lbs         | 4,810 lbs         | 6,480 lbs        | 4,000 lbs                   | 35 psi   |
| 1,900 kgs              | 2,060 kgs         | 2,180 kgs         | 2,940 kgs        | 1,815 kgs                   | 2.4 bar  |
|                        |                   |                   | 6,620 lbs        |                             | 38 psi   |
|                        |                   |                   | 3,005 kgs        |                             | 2.6 bar  |
|                        |                   |                   | 6,780 lbs        |                             | 41 psi   |
|                        |                   |                   | 3,075 kgs        |                             | 2.8 bar  |

\*All load values are for maximum indicated speeds at low torque.  
**\*20 mph (30 km/h): high torque field work or max road speed.**  
 \*All load values for ground slopes up to 20% (above 20% consult Michelin)

| Tire Technical Data  |                  |                   |                        |                             |  |    |  |                |  |        |  |           |
|--|------------------|-------------------|------------------------|-----------------------------|--|----|--|----------------|--|--------|--|-----------|
| Unloaded Dimensions  |                  | Loaded Dimensions |                        | Rims<br>(preferred in bold) |  |    |  |                |  |        |  |           |
| Overall Width  | Overall Diameter | Loaded Radius     | Rolling Circumference  |                             |  |    |  |                |  |        |  |           |
| 12.6 in  | 55.9 in          | 25.6 in           | 166.9 in               | <b>W10</b>                  |  |    |  |                |  |        |  |           |
| 320 mm   | 1,420 mm         | 651 mm            | 4,239 mm               |                             |  |    |  |                |  |        |  |           |
| <table border="1"> <tr><th colspan="2">Rolling Circumference Index</th></tr> <tr><td colspan="2">41</td></tr> <tr><th colspan="2">Number of Lugs</th></tr> <tr><td colspan="2">24 x 2</td></tr> </table> |                  |                   |                        | Rolling Circumference Index |  | 41 |  | Number of Lugs |  | 24 x 2 |  | Tube MSPN |
| Rolling Circumference Index  |                  |                   |                        |                             |  |    |  |                |  |        |  |           |
| 41   |                  |                   |                        |                             |  |    |  |                |  |        |  |           |
| Number of Lugs   |                  |                   |                        |                             |  |    |  |                |  |        |  |           |
| 24 x 2   |                  |                   |                        |                             |  |    |  |                |  |        |  |           |
|  |                  |                   |                        | Tube CAI                    |  |    |  |                |  |        |  |           |
|  |                  |                   |                        | Minimum Dual/Triple Spacing |  |    |  |                |  |        |  |           |
| Gross Flat Plate   | Tire Weight      | 100% Tire Volume  | Centerline Tread Depth | 17.1 in                     |  |    |  |                |  |        |  |           |
| 175 sq in  | 144 lbs          | 54.7 gals         | 49/32nd                | 434 mm                      |  |    |  |                |  |        |  |           |
| 1,129 sq cm  | 65 kgs           | 207 liters        | 39 mm                  |                             |  |    |  |                |  |        |  |           |

NOTE:

- When used as duals, tire load carrying capacity must be reduced 12%
- When used as triples, tire load carrying capacity must be reduced 18%





# MICHELIN AGRIBIB

## 380/85 R34 137A8/137B TL AGRIBIB

MSPN: 59412

CAI: 122781

| Load per tire (single) |                   |                   |                  |                             |  | Pressure | Tire Technical Data               |                  |                   |                        |  |
|------------------------|-------------------|-------------------|------------------|-----------------------------|--|----------|-----------------------------------|------------------|-------------------|------------------------|--|
| 30 mph<br>50 km/h      | 25 mph<br>40 km/h | 20 mph<br>30 km/h | 6 mph<br>10 km/h | 25 mph Dual<br>40 km/h Dual |  |          | Unloaded Dimensions               |                  | Loaded Dimensions |                        | Rims<br>(preferred in bold)<br><b>W12</b><br>W13 |
|                        |                   | 2,470 lbs         | 3,420 lbs        | 2,000 lbs                   |  | 6 psi    | Overall Width                     | Overall Diameter | Loaded Radius     | Rolling Circumference  |  |
|                        |                   | 1,120 kgs         | 1,550 kgs        | 905 kgs                     |  | 0.4 bar  | 15.5 in                           | 59.2 in          | 26.5 in           | 175.6 in               |  |
| 2,760 lbs              | 2,760 lbs         | 2,910 lbs         | 3,950 lbs        | 2,430 lbs                   |  | 9 psi    | 394 mm                            | 1,503 mm         | 673 mm            | 4,461 mm               | Minimum Dual/Triple Spacing<br>20.0 in<br>507 mm |
| 1,250 kgs              | 1,250 kgs         | 1,320 kgs         | 1,790 kgs        | 1,100 kgs                   |  | 0.6 bar  | Rolling Circumference Index<br>42 |                  |                   |                        |  |
| 3,200 lbs              | 3,200 lbs         | 3,420 lbs         | 4,460 lbs        | 2,810 lbs                   |  | 12 psi   | Number of Lugs<br>23 x 2          |                  |                   |                        |  |
| 1,450 kgs              | 1,450 kgs         | 1,550 kgs         | 2,025 kgs        | 1,275 kgs                   |  | 0.8 bar  | Gross Flat Plate                  | Tire Weight      | 100% Tire Volume  | Centerline Tread Depth |  |
| 3,640 lbs              | 3,640 lbs         | 3,910 lbs         | 4,980 lbs        | 3,200 lbs                   |  | 15 psi   | 254 sq in                         | 189 lbs          | 81.1 gals         | 55/32nd                |  |
| 1,650 kgs              | 1,650 kgs         | 1,775 kgs         | 2,260 kgs        | 1,450 kgs                   |  | 1.0 bar  | 1,638 sq cm                       | 86 kgs           | 307 liters        | 44 mm                  |  |
| 4,080 lbs              | 4,080 lbs         | 4,410 lbs         | 5,510 lbs        | 3,590 lbs                   |  | 17 psi   |                                   |                  |                   |                        |  |
| 1,850 kgs              | 1,850 kgs         | 2,000 kgs         | 2,500 kgs        | 1,630 kgs                   |  | 1.2 bar  |                                   |                  |                   |                        |  |
| 4,570 lbs              | 4,570 lbs         | 4,880 lbs         | 6,060 lbs        | 4,030 lbs                   |  | 20 psi   |                                   |                  |                   |                        |  |
| 2,075 kgs              | 2,075 kgs         | 2,215 kgs         | 2,750 kgs        | 1,830 kgs                   |  | 1.4 bar  |                                   |                  |                   |                        |  |
| 5,070 lbs              | 5,070 lbs         | 5,360 lbs         | 6,610 lbs        | 4,460 lbs                   |  | 23 psi   |                                   |                  |                   |                        |  |
| 2,300 kgs              | 2,300 kgs         | 2,430 kgs         | 3,000 kgs        | 2,025 kgs                   |  | 1.6 bar  |                                   |                  |                   |                        |  |
|                        |                   |                   | 6,940 lbs        |                             |  | 25 psi   |                                   |                  |                   |                        |  |
|                        |                   |                   | 3,150 kgs        |                             |  | 1.7 bar  |                                   |                  |                   |                        |  |
|                        |                   |                   | 7,280 lbs        |                             |  | 26 psi   |                                   |                  |                   |                        |  |
|                        |                   |                   | 3,300 kgs        |                             |  | 1.8 bar  |                                   |                  |                   |                        |  |
|                        |                   |                   | 7,610 lbs        |                             |  | 28 psi   |                                   |                  |                   |                        |  |
|                        |                   |                   | 3,450 kgs        |                             |  | 1.9 bar  |                                   |                  |                   |                        |  |

\*All load values are for maximum indicated speeds at low torque.

\*20 mph (30 km/h): high torque field work or max road speed.

\*All load values for ground slopes up to 20% (above 20% consult Michelin)

## 420/90 R30 147A8/147B TL AGRIBIB

MSPN: 68713

CAI: 953332

| Load per tire (single) |                   |                   |                  |                             |  | Pressure | Tire Technical Data               |                  |                   |                        |   |
|------------------------|-------------------|-------------------|------------------|-----------------------------|--|----------|-----------------------------------|------------------|-------------------|------------------------|---|
| 30 mph<br>50 km/h      | 25 mph<br>40 km/h | 20 mph<br>30 km/h | 6 mph<br>10 km/h | 25 mph Dual<br>40 km/h Dual |  |          | Unloaded Dimensions               |                  | Loaded Dimensions |                        | Rims<br>(preferred in bold)<br><b>DW13</b><br>W13, W14L,<br>DW14L |
|                        |                   | 2,830 lbs         | 3,970 lbs        | 2,360 lbs                   |  | 6 psi    | Overall Width                     | Overall Diameter | Loaded Radius     | Rolling Circumference  |   |
|                        |                   | 1,285 kgs         | 1,800 kgs        | 1,070 kgs                   |  | 0.4 bar  | 17.4 in                           | 60.4 in          | 27.2 in           | 179.4 in               |   |
| 3,200 lbs              | 3,200 lbs         | 3,420 lbs         | 4,650 lbs        | 2,810 lbs                   |  | 9 psi    | 443 mm                            | 1,533 mm         | 690 mm            | 4,556 mm               | Minimum Dual/Triple Spacing<br>21.7 in<br>552 mm                  |
| 1,450 kgs              | 1,450 kgs         | 1,550 kgs         | 2,110 kgs        | 1,275 kgs                   |  | 0.6 bar  | Rolling Circumference Index<br>42 |                  |                   |                        |   |
| 3,750 lbs              | 3,750 lbs         | 3,970 lbs         | 5,320 lbs        | 3,300 lbs                   |  | 12 psi   | Number of Lugs<br>21 x 2          |                  |                   |                        |   |
| 1,700 kgs              | 1,700 kgs         | 1,800 kgs         | 2,415 kgs        | 1,495 kgs                   |  | 0.8 bar  | Gross Flat Plate                  | Tire Weight      | 100% Tire Volume  | Centerline Tread Depth |   |
| 4,800 lbs              | 4,800 lbs         | 5,070 lbs         | 6,690 lbs        | 4,210 lbs                   |  | 17 psi   | 263 sq in                         | 242 lbs          | 100.1 gals        | 55/32nd                |   |
| 2,175 kgs              | 2,175 kgs         | 2,300 kgs         | 3,035 kgs        | 1,910 kgs                   |  | 1.2 bar  | 1,697 sq cm                       | 110 kgs          | 379 liters        | 44 mm                  |   |
| 5,840 lbs              | 5,840 lbs         | 6,170 lbs         | 8,050 lbs        | 5,140 lbs                   |  | 23 psi   |                                   |                  |                   |                        |   |
| 2,650 kgs              | 2,650 kgs         | 2,800 kgs         | 3,650 kgs        | 2,330 kgs                   |  | 1.6 bar  |                                   |                  |                   |                        |   |
| 6,390 lbs              | 6,390 lbs         | 6,780 lbs         | 9,370 lbs        | 5,620 lbs                   |  | 29 psi   |                                   |                  |                   |                        |   |
| 2,900 kgs              | 2,900 kgs         | 3,075 kgs         | 4,250 kgs        | 2,550 kgs                   |  | 2.0 bar  |                                   |                  |                   |                        |   |
| 6,590 lbs              | 6,590 lbs         | 7,080 lbs         | 9,650 lbs        | 5,800 lbs                   |  | 32 psi   |                                   |                  |                   |                        |   |
| 2,990 kgs              | 2,990 kgs         | 3,210 kgs         | 4,375 kgs        | 2,630 kgs                   |  | 2.2 bar  |                                   |                  |                   |                        |   |
| 6,780 lbs              | 6,780 lbs         | 7,390 lbs         | 9,920 lbs        | 5,960 lbs                   |  | 35 psi   |                                   |                  |                   |                        |   |
| 3,075 kgs              | 3,075 kgs         | 3,350 kgs         | 4,500 kgs        | 2,705 kgs                   |  | 2.4 bar  |                                   |                  |                   |                        |   |
|                        |                   |                   | 10,050 lbs       |                             |  | 38 psi   |                                   |                  |                   |                        |   |
|                        |                   |                   | 4,560 kgs        |                             |  | 2.6 bar  |                                   |                  |                   |                        |   |
|                        |                   |                   | 10,200 lbs       |                             |  | 41 psi   |                                   |                  |                   |                        |   |
|                        |                   |                   | 4,625 kgs        |                             |  | 2.8 bar  |                                   |                  |                   |                        |   |

\*All load values are for maximum indicated speeds at low torque.

\*20 mph (30 km/h): high torque field work or max road speed.

\*All load values for ground slopes up to 20% (above 20% consult Michelin)

## NOTE:

- When used as duals, tire load carrying capacity must be reduced 12%
- When used as triples, tire load carrying capacity must be reduced 18%





**420/85 R34 142A8/142B TL AGRIBIB**  
**MSPN: 84230** **CAI: 042716**

| Load per tire (single) |                   |                   |                  |                             |          |
|------------------------|-------------------|-------------------|------------------|-----------------------------|----------|
| 30 mph<br>50 km/h      | 25 mph<br>40 km/h | 20 mph<br>30 km/h | 6 mph<br>10 km/h | 25 mph Dual<br>40 km/h Dual | Pressure |
|                        |                   | 2,870 lbs         | 3,970 lbs        | 2,360 lbs                   | 6 psi    |
|                        |                   | 1,300 kgs         | 1,800 kgs        | 1,070 kgs                   | 0.4 bar  |
| 3,200 lbs              | 3,200 lbs         | 3,430 lbs         | 4,570 lbs        | 2,820 lbs                   | 9 psi    |
| 1,450 kgs              | 1,450 kgs         | 1,555 kgs         | 2,075 kgs        | 1,280 kgs                   | 0.6 bar  |
| 3,730 lbs              | 3,730 lbs         | 3,990 lbs         | 5,180 lbs        | 3,280 lbs                   | 12 psi   |
| 1,690 kgs              | 1,690 kgs         | 1,810 kgs         | 2,350 kgs        | 1,490 kgs                   | 0.8 bar  |
| 4,250 lbs              | 4,250 lbs         | 4,560 lbs         | 5,790 lbs        | 3,750 lbs                   | 15 psi   |
| 1,930 kgs              | 1,930 kgs         | 2,070 kgs         | 2,625 kgs        | 1,700 kgs                   | 1.0 bar  |
| 4,780 lbs              | 4,780 lbs         | 5,130 lbs         | 6,390 lbs        | 4,210 lbs                   | 17 psi   |
| 2,170 kgs              | 2,170 kgs         | 2,325 kgs         | 2,900 kgs        | 1,910 kgs                   | 1.2 bar  |
| 5,310 lbs              | 5,310 lbs         | 5,690 lbs         | 7,000 lbs        | 4,670 lbs                   | 20 psi   |
| 2,410 kgs              | 2,410 kgs         | 2,580 kgs         | 3,175 kgs        | 2,120 kgs                   | 1.4 bar  |
| 5,840 lbs              | 5,840 lbs         | 6,250 lbs         | 7,610 lbs        | 5,140 lbs                   | 23 psi   |
| 2,650 kgs              | 2,650 kgs         | 2,835 kgs         | 3,450 kgs        | 2,330 kgs                   | 1.6 bar  |
|                        |                   |                   | 7,990 lbs        |                             | 25 psi   |
|                        |                   |                   | 3,625 kgs        |                             | 1.7 bar  |
|                        |                   |                   | 8,380 lbs        |                             | 26 psi   |
|                        |                   |                   | 3,800 kgs        |                             | 1.8 bar  |
|                        |                   |                   | 8,760 lbs        |                             | 28 psi   |
|                        |                   |                   | 3,975 kgs        |                             | 1.9 bar  |

\*All load values are for maximum indicated speeds at low torque.  
**\*20 mph (30 km/h): high torque field work or max road speed.**  
 \*All load values for ground slopes up to 20% (above 20% consult Michelin)

| Tire Technical Data  |                  |                   |                        |  |  |    |  |                |  |        |  |                    |
|--|------------------|-------------------|------------------------|--|--|----|--|----------------|--|--------|--|--------------------|
| Unloaded Dimensions  |                  | Loaded Dimensions |                        | Rims<br>(preferred in bold)            |  |    |  |                |  |        |  |                    |
| Overall Width  | Overall Diameter | Loaded Radius     | Rolling Circumference  |  |  |    |  |                |  |        |  |                    |
| 17.7 in  | 62.2 in          | 27.8 in           | 184.6 in               | <b>DW15L</b><br>W13, W14L, DW14L, W15L |  |    |  |                |  |        |  |                    |
| 449 mm   | 1,580 mm         | 707 mm            | 4,690 mm               |  |  |    |  |                |  |        |  |                    |
| <table border="1"> <tr><th colspan="2">Rolling Circumference Index</th></tr> <tr><td colspan="2">43</td></tr> <tr><th colspan="2">Number of Lugs</th></tr> <tr><td colspan="2">20 x 2</td></tr> </table> |                  |                   |                        | Rolling Circumference Index            |  | 43 |  | Number of Lugs |  | 20 x 2 |  | Tube MSPN<br>37243 |
| Rolling Circumference Index  |                  |                   |                        |  |  |    |  |                |  |        |  |                    |
| 43   |                  |                   |                        |  |  |    |  |                |  |        |  |                    |
| Number of Lugs   |                  |                   |                        |  |  |    |  |                |  |        |  |                    |
| 20 x 2   |                  |                   |                        |  |  |    |  |                |  |        |  |                    |
|  |                  |                   |                        | Tube CAI<br>171115                     |  |    |  |                |  |        |  |                    |
| Gross Flat Plate   | Tire Weight      | 100% Tire Volume  | Centerline Tread Depth | Minimum Dual/Triple Spacing            |  |    |  |                |  |        |  |                    |
| 275 sq in  | 238 lbs          | 101.2 gals        | 64/32nd                | 22.7 in                                |  |    |  |                |  |        |  |                    |
| 1,774 sq cm  | 108 kgs          | 383 liters        | 51 mm                  | 576 mm                                 |  |    |  |                |  |        |  |                    |

**420/85 R34 147A8/147B TL AGRIBIB**  
**MSPN: 30127** **CAI: 788910**

| Load per tire (single) |                   |                   |                  |                             |          |
|------------------------|-------------------|-------------------|------------------|-----------------------------|----------|
| 30 mph<br>50 km/h      | 25 mph<br>40 km/h | 20 mph<br>30 km/h | 6 mph<br>10 km/h | 25 mph Dual<br>40 km/h Dual | Pressure |
|                        |                   | 2,870 lbs         | 3,970 lbs        | 2,360 lbs                   | 6 psi    |
|                        |                   | 1,300 kgs         | 1,800 kgs        | 1,070 kgs                   | 0.4 bar  |
| 3,200 lbs              | 3,200 lbs         | 3,440 lbs         | 4,570 lbs        | 2,820 lbs                   | 9 psi    |
| 1,450 kgs              | 1,450 kgs         | 1,560 kgs         | 2,075 kgs        | 1,280 kgs                   | 0.6 bar  |
| 3,740 lbs              | 3,740 lbs         | 4,000 lbs         | 5,180 lbs        | 3,300 lbs                   | 12 psi   |
| 1,695 kgs              | 1,695 kgs         | 1,815 kgs         | 2,350 kgs        | 1,495 kgs                   | 0.8 bar  |
| 4,810 lbs              | 4,810 lbs         | 5,140 lbs         | 6,390 lbs        | 4,230 lbs                   | 17 psi   |
| 2,180 kgs              | 2,180 kgs         | 2,330 kgs         | 2,900 kgs        | 1,920 kgs                   | 1.2 bar  |
| 5,840 lbs              | 5,840 lbs         | 6,250 lbs         | 7,610 lbs        | 5,140 lbs                   | 23 psi   |
| 2,650 kgs              | 2,650 kgs         | 2,835 kgs         | 3,450 kgs        | 2,330 kgs                   | 1.6 bar  |
| 6,310 lbs              | 6,310 lbs         | 6,750 lbs         | 8,920 lbs        | 5,560 lbs                   | 29 psi   |
| 2,860 kgs              | 2,860 kgs         | 3,060 kgs         | 4,045 kgs        | 2,520 kgs                   | 2.0 bar  |
| 6,550 lbs              | 6,550 lbs         | 7,000 lbs         | 9,240 lbs        | 5,770 lbs                   | 32 psi   |
| 2,970 kgs              | 2,970 kgs         | 3,175 kgs         | 4,190 kgs        | 2,615 kgs                   | 2.2 bar  |
| 6,780 lbs              | 6,780 lbs         | 7,250 lbs         | 9,550 lbs        | 5,970 lbs                   | 35 psi   |
| 3,075 kgs              | 3,075 kgs         | 3,290 kgs         | 4,330 kgs        | 2,710 kgs                   | 2.4 bar  |
|                        |                   |                   | 9,870 lbs        |                             | 38 psi   |
|                        |                   |                   | 4,475 kgs        |                             | 2.6 bar  |
|                        |                   |                   | 10,170 lbs       |                             | 41 psi   |
|                        |                   |                   | 4,615 kgs        |                             | 2.8 bar  |

\*All load values are for maximum indicated speeds at low torque.  
**\*20 mph (30 km/h): high torque field work or max road speed.**  
 \*All load values for ground slopes up to 20% (above 20% consult Michelin)

| Tire Technical Data  |                  |                   |                        |  |  |    |  |                |  |        |  |                    |
|--|------------------|-------------------|------------------------|--|--|----|--|----------------|--|--------|--|--------------------|
| Unloaded Dimensions  |                  | Loaded Dimensions |                        | Rims<br>(preferred in bold)            |  |    |  |                |  |        |  |                    |
| Overall Width  | Overall Diameter | Loaded Radius     | Rolling Circumference  |  |  |    |  |                |  |        |  |                    |
| 17.9 in  | 62.8 in          | 28.5 in           | 187.0 in               | <b>DW15L</b><br>W14L, DW14L, W15L, W13 |  |    |  |                |  |        |  |                    |
| 455 mm   | 1,595 mm         | 725 mm            | 4,751 mm               |  |  |    |  |                |  |        |  |                    |
| <table border="1"> <tr><th colspan="2">Rolling Circumference Index</th></tr> <tr><td colspan="2">43</td></tr> <tr><th colspan="2">Number of Lugs</th></tr> <tr><td colspan="2">20 x 2</td></tr> </table> |                  |                   |                        | Rolling Circumference Index            |  | 43 |  | Number of Lugs |  | 20 x 2 |  | Tube MSPN<br>37243 |
| Rolling Circumference Index  |                  |                   |                        |  |  |    |  |                |  |        |  |                    |
| 43   |                  |                   |                        |  |  |    |  |                |  |        |  |                    |
| Number of Lugs   |                  |                   |                        |  |  |    |  |                |  |        |  |                    |
| 20 x 2   |                  |                   |                        |  |  |    |  |                |  |        |  |                    |
|  |                  |                   |                        | Tube CAI<br>171115                     |  |    |  |                |  |        |  |                    |
| Gross Flat Plate   | Tire Weight      | 100% Tire Volume  | Centerline Tread Depth | Minimum Dual/Triple Spacing            |  |    |  |                |  |        |  |                    |
| 254 sq in  | 238 lbs          | 101.2 gals        | 64/32nd                | 22.7 in                                |  |    |  |                |  |        |  |                    |
| 1,641 sq cm  | 108 kgs          | 383 liters        | 51 mm                  | 576 mm                                 |  |    |  |                |  |        |  |                    |

NOTE:  
 • When used as duals, tire load carrying capacity must be reduced 12%  
 • When used as triples, tire load carrying capacity must be reduced 18%



# MICHELIN AGRIBIB

## 18.4 R34 144A8/141B TL AGRIBIB

MSPN: 40989

CAI: 123846

| Load per tire (single)      |                   |                   |                  |                             |  | Pressure | Tire Technical Data  |                     |                     |                           |                                   |                                      |    |  |                |  |        |  |  |  |
|-----------------------------|-------------------|-------------------|------------------|-----------------------------|--|----------|--|---------------------|---------------------|---------------------------|-----------------------------------|--------------------------------------|----|--|----------------|--|--------|--|--|--|
| 30 mph<br>50 km/h           | 25 mph<br>40 km/h | 20 mph<br>30 km/h | 6 mph<br>10 km/h | 25 mph Dual<br>40 km/h Dual |  |          | Unloaded Dimensions  |                     | Loaded Dimensions   |                           | Rims<br>(preferred in<br>bold)    |                                      |    |  |                |  |        |  |  |  |
|                             |                   |                   |                  | 2,490 lbs                   |  | 6 psi    | Overall<br>Width   | Overall<br>Diameter | Loaded<br>Radius    | Rolling<br>Circumference  |                                   | <b>DW16L</b><br>W15L,<br>DW15L, W16L |    |  |                |  |        |  |  |  |
|                             |                   |                   |                  | 1,130 kgs                   |  | 0.4 bar  | 18.8 in  | 65.4 in             | 29.3 in             | 194.2 in                  |                                   |                                      |    |  |                |  |        |  |  |  |
|                             |                   | 3,700 lbs         | 4,720 lbs        | 3,010 lbs                   |  | 7 psi    | 477 mm   | 1,662 mm            | 744 mm              | 4,933 mm                  |                                   |                                      |    |  |                |  |        |  |  |  |
|                             |                   | 1,680 kgs         | 2,140 kgs        | 1,365 kgs                   |  | 0.5 bar  | <table border="1"> <tr> <th colspan="2">Rolling Circumference Index</th> </tr> <tr> <td colspan="2">44</td> </tr> <tr> <th colspan="2">Number of Lugs</th> </tr> <tr> <td colspan="2">20 x 2</td> </tr> </table> |                     |                     |                           | Rolling Circumference Index       |                                      | 44 |  | Number of Lugs |  | 20 x 2 |  |  |  |
| Rolling Circumference Index |                   |                   |                  |                             |  |          |  |                     |                     |                           |                                   |                                      |    |  |                |  |        |  |  |  |
| 44                          |                   |                   |                  |                             |  |          |  |                     |                     |                           |                                   |                                      |    |  |                |  |        |  |  |  |
| Number of Lugs              |                   |                   |                  |                             |  |          |  |                     |                     |                           |                                   |                                      |    |  |                |  |        |  |  |  |
| 20 x 2                      |                   |                   |                  |                             |  |          |  |                     |                     |                           |                                   |                                      |    |  |                |  |        |  |  |  |
| 3,750 lbs                   | 4,010 lbs         | 4,300 lbs         | 5,470 lbs        | 3,530 lbs                   |  | 9 psi    |  |                     |                     |                           |                                   |                                      |    |  |                |  |        |  |  |  |
| 1,700 kgs                   | 1,820 kgs         | 1,950 kgs         | 2,480 kgs        | 1,600 kgs                   |  | 0.6 bar  |  |                     |                     |                           | Tube MSPN<br>71039                |                                      |    |  |                |  |        |  |  |  |
| 4,130 lbs                   | 4,440 lbs         | 4,760 lbs         | 6,050 lbs        | 3,910 lbs                   |  | 12 psi   |  |                     |                     |                           | Tube CAI<br>170150                |                                      |    |  |                |  |        |  |  |  |
| 1,875 kgs                   | 2,015 kgs         | 2,160 kgs         | 2,745 kgs        | 1,775 kgs                   |  | 0.8 bar  |  |                     |                     |                           | Minimum<br>Dual/Triple<br>Spacing |                                      |    |  |                |  |        |  |  |  |
| 4,520 lbs                   | 4,870 lbs         | 5,220 lbs         | 6,640 lbs        | 4,290 lbs                   |  | 15 psi   |  |                     |                     |                           | 24.1 in                           |                                      |    |  |                |  |        |  |  |  |
| 2,050 kgs                   | 2,210 kgs         | 2,370 kgs         | 3,010 kgs        | 1,945 kgs                   |  | 1.0 bar  |  |                     |                     |                           | 611 mm                            |                                      |    |  |                |  |        |  |  |  |
| 4,920 lbs                   | 5,310 lbs         | 5,690 lbs         | 7,220 lbs        | 4,670 lbs                   |  | 17 psi   |  |                     |                     |                           |                                   |                                      |    |  |                |  |        |  |  |  |
| 2,230 kgs                   | 2,410 kgs         | 2,580 kgs         | 3,275 kgs        | 2,120 kgs                   |  | 1.2 bar  |  |                     |                     |                           |                                   |                                      |    |  |                |  |        |  |  |  |
| 5,300 lbs                   | 5,740 lbs         | 6,150 lbs         | 7,800 lbs        | 5,050 lbs                   |  | 20 psi   | Gross<br>Flat Plate  | Tire<br>Weight      | 100% Tire<br>Volume | Centerline<br>Tread Depth |                                   |                                      |    |  |                |  |        |  |  |  |
| 2,405 kgs                   | 2,605 kgs         | 2,790 kgs         | 3,540 kgs        | 2,290 kgs                   |  | 1.4 bar  | 315 sq in  | 274 lbs             | 139.2 gals          | 68/32nd                   |                                   |                                      |    |  |                |  |        |  |  |  |
| 5,690 lbs                   | 6,170 lbs         | 6,610 lbs         | 8,390 lbs        | 5,430 lbs                   |  | 23 psi   | 2,033 sq cm  | 125 kgs             | 527 liters          | 54 mm                     |                                   |                                      |    |  |                |  |        |  |  |  |
| 2,580 kgs                   | 2,800 kgs         | 3,000 kgs         | 3,805 kgs        | 2,465 kgs                   |  | 1.6 bar  |  |                     |                     |                           |                                   |                                      |    |  |                |  |        |  |  |  |
|                             |                   |                   | 8,970 lbs        |                             |  | 26 psi   |  |                     |                     |                           |                                   |                                      |    |  |                |  |        |  |  |  |
|                             |                   |                   | 4,070 kgs        |                             |  | 1.8 bar  |  |                     |                     |                           |                                   |                                      |    |  |                |  |        |  |  |  |
|                             |                   |                   | 9,260 lbs        |                             |  | 28 psi   |  |                     |                     |                           |                                   |                                      |    |  |                |  |        |  |  |  |
|                             |                   |                   | 4,200 kgs        |                             |  | 1.9 bar  |  |                     |                     |                           |                                   |                                      |    |  |                |  |        |  |  |  |

\*All load values are for maximum indicated speeds at low torque.

\*20 mph (30 km/h): high torque field work or max road speed.

\*All load values for ground slopes up to 20% (above 20% consult Michelin)

## 12.4 R36 124A8/121B TL AGRIBIB

MSPN: 03338

CAI: 123952

| Load per tire (single)      |                   |                   |                  |  | Pressure | Tire Technical Data |  |                     |                     |                                |                                   |                   |    |  |                |  |        |  |  |  |
|-----------------------------|-------------------|-------------------|------------------|--|----------|---------------------|--|---------------------|---------------------|--------------------------------|-----------------------------------|-------------------|----|--|----------------|--|--------|--|--|--|
| 30 mph<br>50 km/h           | 25 mph<br>40 km/h | 20 mph<br>30 km/h | 6 mph<br>10 km/h |  |          | Unloaded Dimensions |  | Loaded Dimensions   |                     | Rims<br>(preferred in<br>bold) |                                   |                   |    |  |                |  |        |  |  |  |
|                             |                   | 2,120 lbs         | 2,690 lbs        |  |          | 7 psi               | Overall<br>Width   | Overall<br>Diameter | Loaded<br>Radius    |                                | Rolling<br>Circumference          | <b>W11</b><br>W10 |    |  |                |  |        |  |  |  |
|                             |                   | 960 kgs           | 1,220 kgs        |  |          | 0.5 bar             | 12.5 in  | 57.5 in             | 26.5 in             | 171.8 in                       |                                   |                   |    |  |                |  |        |  |  |  |
| 2,120 lbs                   | 2,290 lbs         | 2,450 lbs         | 3,130 lbs        |  |          | 9 psi               | 318 mm   | 1,460 mm            | 673 mm              | 4,363 mm                       |                                   |                   |    |  |                |  |        |  |  |  |
| 960 kgs                     | 1,040 kgs         | 1,110 kgs         | 1,420 kgs        |  |          | 0.6 bar             | <table border="1"> <tr> <th colspan="2">Rolling Circumference Index</th> </tr> <tr> <td colspan="2">41</td> </tr> <tr> <th colspan="2">Number of Lugs</th> </tr> <tr> <td colspan="2">24 x 2</td> </tr> </table> |                     |                     |                                | Rolling Circumference Index       |                   | 41 |  | Number of Lugs |  | 24 x 2 |  |  |  |
| Rolling Circumference Index |                   |                   |                  |  |          |                     |  |                     |                     |                                |                                   |                   |    |  |                |  |        |  |  |  |
| 41                          |                   |                   |                  |  |          |                     |  |                     |                     |                                |                                   |                   |    |  |                |  |        |  |  |  |
| Number of Lugs              |                   |                   |                  |  |          |                     |  |                     |                     |                                |                                   |                   |    |  |                |  |        |  |  |  |
| 24 x 2                      |                   |                   |                  |  |          |                     |  |                     |                     |                                |                                   |                   |    |  |                |  |        |  |  |  |
| 2,340 lbs                   | 2,540 lbs         | 2,710 lbs         | 3,460 lbs        |  |          | 12 psi              |  |                     |                     |                                | Tube MSPN<br>55286                |                   |    |  |                |  |        |  |  |  |
| 1,060 kgs                   | 1,150 kgs         | 1,230 kgs         | 1,570 kgs        |  |          | 0.8 bar             |  |                     |                     |                                | Tube CAI<br>170072                |                   |    |  |                |  |        |  |  |  |
| 2,550 lbs                   | 2,790 lbs         | 2,980 lbs         | 3,790 lbs        |  |          | 15 psi              |  |                     |                     |                                | Minimum<br>Dual/Triple<br>Spacing |                   |    |  |                |  |        |  |  |  |
| 1,155 kgs                   | 1,265 kgs         | 1,350 kgs         | 1,720 kgs        |  |          | 1.0 bar             |  |                     |                     |                                | 16.9 in                           |                   |    |  |                |  |        |  |  |  |
| 2,770 lbs                   | 3,030 lbs         | 3,240 lbs         | 4,120 lbs        |  |          | 17 psi              |  |                     |                     |                                | 429 mm                            |                   |    |  |                |  |        |  |  |  |
| 1,255 kgs                   | 1,375 kgs         | 1,470 kgs         | 1,870 kgs        |  |          | 1.2 bar             |  |                     |                     |                                |                                   |                   |    |  |                |  |        |  |  |  |
| 2,980 lbs                   | 3,280 lbs         | 3,510 lbs         | 4,460 lbs        |  |          | 20 psi              | Gross<br>Flat Plate  | Tire<br>Weight      | 100% Tire<br>Volume | Centerline<br>Tread Depth      |                                   |                   |    |  |                |  |        |  |  |  |
| 1,350 kgs                   | 1,490 kgs         | 1,590 kgs         | 2,025 kgs        |  |          | 1.4 bar             | 173 sq in  | 134 lbs             | 58.1 gals           | 42/32nd                        |                                   |                   |    |  |                |  |        |  |  |  |
| 3,200 lbs                   | 3,530 lbs         | 3,770 lbs         | 4,800 lbs        |  |          | 23 psi              | 1,113 sq cm  | 61 kgs              | 220 liters          | 33 mm                          |                                   |                   |    |  |                |  |        |  |  |  |
| 1,450 kgs                   | 1,600 kgs         | 1,710 kgs         | 2,175 kgs        |  |          | 1.6 bar             |  |                     |                     |                                |                                   |                   |    |  |                |  |        |  |  |  |
|                             |                   |                   | 4,960 lbs        |  |          | 25 psi              |  |                     |                     |                                |                                   |                   |    |  |                |  |        |  |  |  |
|                             |                   |                   | 2,250 kgs        |  |          | 1.7 bar             |  |                     |                     |                                |                                   |                   |    |  |                |  |        |  |  |  |
|                             |                   |                   | 5,130 lbs        |  |          | 26 psi              |  |                     |                     |                                |                                   |                   |    |  |                |  |        |  |  |  |
|                             |                   |                   | 2,325 kgs        |  |          | 1.8 bar             |  |                     |                     |                                |                                   |                   |    |  |                |  |        |  |  |  |
|                             |                   |                   | 5,290 lbs        |  |          | 28 psi              |  |                     |                     |                                |                                   |                   |    |  |                |  |        |  |  |  |
|                             |                   |                   | 2,400 kgs        |  |          | 1.9 bar             |  |                     |                     |                                |                                   |                   |    |  |                |  |        |  |  |  |

\*All load values are for maximum indicated speeds at low torque.

\*20 mph (30 km/h): high torque field work or max road speed.

\*All load values for ground slopes up to 20% (above 20% consult Michelin)

## NOTE:

- When used as duals, tire load carrying capacity must be reduced 12%
- When used as triples, tire load carrying capacity must be reduced 18%





## 12.4 R38 125A8/122B TL AGRIBIB

MSPN: 50333

CAI: 123962

| Load per tire (single) |                        |                        |                        |                   | *All load values are for maximum indicated speeds at low torque.<br>*20 mph (30 km/h): high torque field work or max road speed.<br>*All load values for ground slopes up to 20% (above 20% consult Michelin) |                     |                         |                        |  |
|------------------------|------------------------|------------------------|------------------------|-------------------|---|---------------------|-------------------------|------------------------|--|
| 30 mph<br>50 km/h      | 25 mph<br>40 km/h      | 20 mph<br>30 km/h      | 6 mph<br>10 km/h       | Pressure          | Tire Technical Data   |                     |                         |                        |  |
|                        |                        | 2,180 lbs<br>990 kgs   | 2,780 lbs<br>1,260 kgs | 7 psi<br>0.5 bar  | Unloaded Dimensions   |                     |                         |                        | Rims<br>(preferred in bold)<br><b>W11</b><br>W10, DW10 |
| 2,180 lbs<br>990 kgs   | 2,360 lbs<br>1,070 kgs | 2,540 lbs<br>1,150 kgs | 3,220 lbs<br>1,460 kgs | 9 psi<br>0.6 bar  | Overall Width   | Overall Diameter    | Loaded Radius           | Rolling Circumference  |  |
| 2,400 lbs<br>1,090 kgs | 2,610 lbs<br>1,185 kgs | 2,810 lbs<br>1,275 kgs | 3,560 lbs<br>1,615 kgs | 12 psi<br>0.8 bar | 12.2 in<br>311 mm   | 59.1 in<br>1,500 mm | 27.2 in<br>691 mm       | 176.4 in<br>4,481 mm   |  |
| 2,630 lbs<br>1,195 kgs | 2,870 lbs<br>1,300 kgs | 3,090 lbs<br>1,400 kgs | 3,910 lbs<br>1,775 kgs | 15 psi<br>1.0 bar | Rolling Circumference Index   |                     |                         |                        | Tube MSPN<br>55286                                     |
| 2,850 lbs<br>1,295 kgs | 3,130 lbs<br>1,420 kgs | 3,350 lbs<br>1,520 kgs | 4,250 lbs<br>1,930 kgs | 17 psi<br>1.2 bar | 42  |                     |                         |                        |  |
| 3,090 lbs<br>1,400 kgs | 3,380 lbs<br>1,535 kgs | 3,630 lbs<br>1,645 kgs | 4,610 lbs<br>2,090 kgs | 20 psi<br>1.4 bar | Number of Lugs  |                     |                         |                        | Tube CAI<br>170072                                     |
| 3,310 lbs<br>1,500 kgs | 3,640 lbs<br>1,650 kgs | 3,900 lbs<br>1,770 kgs | 4,950 lbs<br>2,245 kgs | 23 psi<br>1.6 bar | Gross Flat Plate  | Tire Weight         | 100% Tire Volume        | Centerline Tread Depth | Minimum Dual/Triple Spacing                            |
|                        |                        |                        | 5,130 lbs<br>2,325 kgs | 25 psi<br>1.7 bar | 182 sq in<br>1,171 sq cm  | 139 lbs<br>63 kgs   | 58.1 gals<br>220 liters | 44/32nd<br>35 mm       |  |
|                        |                        |                        | 5,290 lbs<br>2,400 kgs | 26 psi<br>1.8 bar |   |                     |                         |                        |  |
|                        |                        |                        | 5,470 lbs<br>2,480 kgs | 28 psi<br>1.9 bar |   |                     |                         |                        |  |

## 13.6 R38 128A8/125B TL AGRIBIB

MSPN: 66666

CAI: 123992

| Load per tire (single) |                        |                        |                        |                             |                          | *All load values are for maximum indicated speeds at low torque.<br>*20 mph (30 km/h): high torque field work or max road speed.<br>*All load values for ground slopes up to 20% (above 20% consult Michelin) |                         |                   |                        |  |
|------------------------|------------------------|------------------------|------------------------|-----------------------------|--------------------------|---|-------------------------|-------------------|------------------------|--|
| 30 mph<br>50 km/h      | 25 mph<br>40 km/h      | 20 mph<br>30 km/h      | 6 mph<br>10 km/h       | 25 mph Dual<br>40 km/h Dual | Pressure                 | Tire Technical Data   |                         |                   |                        |  |
|                        |                        |                        |                        | 1,510 lbs<br>685 kgs        | 6 psi<br>0.4 bar         | Unloaded Dimensions   |                         |                   |                        | Rims<br>(preferred in bold)<br><b>DW12</b><br>W11, W12 |
| 2,400 lbs<br>1,090 kgs | 2,580 lbs<br>1,170 kgs | 2,760 lbs<br>1,250 kgs | 3,510 lbs<br>1,590 kgs | 2,270 lbs<br>1,030 kgs      | 9 psi<br>0.6 bar         | Overall Width   | Overall Diameter        | Loaded Radius     | Rolling Circumference  |  |
| 2,650 lbs<br>1,200 kgs | 2,850 lbs<br>1,295 kgs | 3,050 lbs<br>1,385 kgs | 3,880 lbs<br>1,760 kgs | 2,510 lbs<br>1,140 kgs      | 12 psi<br>0.8 bar        | 14.1 in<br>358 mm   | 61.6 in<br>1,565 mm     | 28.4 in<br>722 mm | 185.2 in<br>4,705 mm   |  |
| 2,900 lbs<br>1,315 kgs | 3,130 lbs<br>1,420 kgs | 3,350 lbs<br>1,520 kgs | 4,250 lbs<br>1,930 kgs | 2,760 lbs<br>1,250 kgs      | 15 psi<br>1.0 bar        | Rolling Circumference Index   |                         |                   |                        | Tube MSPN<br>98232                                     |
| 3,140 lbs<br>1,425 kgs | 3,420 lbs<br>1,550 kgs | 3,660 lbs<br>1,660 kgs | 4,630 lbs<br>2,100 kgs | 3,010 lbs<br>1,365 kgs      | 17 psi<br>1.2 bar        | 43  |                         |                   |                        |  |
| 3,400 lbs<br>1,540 kgs | 3,690 lbs<br>1,675 kgs | 3,960 lbs<br>1,795 kgs | 5,020 lbs<br>2,275 kgs | 3,250 lbs<br>1,475 kgs      | 20 psi<br>1.4 bar        | Number of Lugs  |                         |                   |                        | Tube CAI<br>170079                                     |
| 3,640 lbs<br>1,650 kgs | 3,970 lbs<br>1,800 kgs | 4,250 lbs<br>1,930 kgs | 5,390 lbs<br>2,445 kgs | 3,490 lbs<br>1,585 kgs      | 23 psi<br>1.6 bar        | Gross Flat Plate  | Tire Weight             | 100% Tire Volume  | Centerline Tread Depth | Minimum Dual/Triple Spacing                            |
|                        |                        |                        | 5,770 lbs<br>2,615 kgs | 26 psi<br>1.8 bar           | 187 sq in<br>1,206 sq cm | 180 lbs<br>82 kgs   | 76.6 gals<br>290 liters | 57/32nd<br>45 mm  | 18.3 in<br>465 mm      |  |
|                        |                        |                        | 5,950 lbs<br>2,700 kgs | 28 psi<br>1.9 bar           |                          |   |                         |                   |                        |  |

## NOTE:

- When used as duals, tire load carrying capacity must be reduced 12%
- When used as triples, tire load carrying capacity must be reduced 18%



# MICHELIN AGRIBIB

## 380/80 R38 142A8/142B TL AGRIBIB

MSPN: 30231

CAI: 051026

| Load per tire (single) |                   |                   |                  |                             |  | Pressure | Tire Technical Data   |                  |                   |                        |                                |
|------------------------|-------------------|-------------------|------------------|-----------------------------|--|----------|---|------------------|-------------------|------------------------|--------------------------------|
| 30 mph<br>50 km/h      | 25 mph<br>40 km/h | 20 mph<br>30 km/h | 6 mph<br>10 km/h | 25 mph Dual<br>40 km/h Dual |  |          | Unloaded Dimensions   |                  | Loaded Dimensions |                        | Rims<br>(preferred in<br>bold) |
|                        |                   | 2,430 lbs         | 3,410 lbs        | 2,000 lbs                   |  | 6 psi    | Overall Width   | Overall Diameter | Loaded Radius     | Rolling Circumference  |                                |
|                        |                   | 1,100 kgs         | 1,545 kgs        | 905 kgs                     |  | 0.4 bar  | 15.0 in   | 62.1 in          | 28.5 in           | 185.4 in               |                                |
| 2,760 lbs              | 2,760 lbs         | 2,920 lbs         | 4,000 lbs        | 2,400 lbs                   |  | 9 psi    | 380 mm  | 1,578 mm         | 723 mm            | 4,709 mm               |                                |
| 1,250 kgs              | 1,250 kgs         | 1,325 kgs         | 1,815 kgs        | 1,090 kgs                   |  | 0.6 bar  | Rolling Circumference Index<br>43<br>Number of Lugs<br>23 x 2 |                  |                   |                        |                                |
| 3,220 lbs              | 3,220 lbs         | 3,430 lbs         | 4,600 lbs        | 2,820 lbs                   |  | 12 psi   |   |                  |                   |                        |                                |
| 1,460 kgs              | 1,460 kgs         | 1,555 kgs         | 2,085 kgs        | 1,280 kgs                   |  | 0.8 bar  | Gross Flat Plate  | Tire Weight      | 100% Tire Volume  | Centerline Tread Depth | Minimum Dual/Triple Spacing    |
| 4,140 lbs              | 4,140 lbs         | 4,420 lbs         | 5,800 lbs        | 3,640 lbs                   |  | 17 psi   | 224 sq in   | 205 lbs          | 81.1 gals         | 58/32nd                | 20.0 in                        |
| 1,880 kgs              | 1,880 kgs         | 2,005 kgs         | 2,630 kgs        | 1,650 kgs                   |  | 1.2 bar  | 1,446 sq cm   | 93 kgs           | 307 liters        | 46 mm                  | 507 mm                         |
| 5,070 lbs              | 5,070 lbs         | 5,420 lbs         | 6,990 lbs        | 4,460 lbs                   |  | 23 psi   |   |                  |                   |                        |                                |
| 2,300 kgs              | 2,300 kgs         | 2,460 kgs         | 3,170 kgs        | 2,025 kgs                   |  | 1.6 bar  |   |                  |                   |                        |                                |
| 5,460 lbs              | 5,460 lbs         | 5,840 lbs         | 7,760 lbs        | 4,810 lbs                   |  | 29 psi   |   |                  |                   |                        |                                |
| 2,475 kgs              | 2,475 kgs         | 2,650 kgs         | 3,520 kgs        | 2,180 kgs                   |  | 2.0 bar  |   |                  |                   |                        |                                |
| 5,640 lbs              | 5,640 lbs         | 6,040 lbs         | 8,160 lbs        | 4,970 lbs                   |  | 32 psi   |   |                  |                   |                        |                                |
| 2,560 kgs              | 2,560 kgs         | 2,740 kgs         | 3,700 kgs        | 2,255 kgs                   |  | 2.2 bar  |   |                  |                   |                        |                                |
| 5,840 lbs              | 5,840 lbs         | 6,250 lbs         | 8,540 lbs        | 5,140 lbs                   |  | 35 psi   |   |                  |                   |                        |                                |
| 2,650 kgs              | 2,650 kgs         | 2,835 kgs         | 3,875 kgs        | 2,330 kgs                   |  | 2.4 bar  |   |                  |                   |                        |                                |
|                        |                   |                   | 8,690 lbs        |                             |  | 38 psi   |   |                  |                   |                        |                                |
|                        |                   |                   | 3,940 kgs        |                             |  | 2.6 bar  |   |                  |                   |                        |                                |
|                        |                   |                   | 8,820 lbs        |                             |  | 41 psi   |   |                  |                   |                        |                                |
|                        |                   |                   | 4,000 kgs        |                             |  | 2.8 bar  |   |                  |                   |                        |                                |

\*All load values are for maximum indicated speeds at low torque.

\*20 mph (30 km/h): high torque field work or max road speed.

\*All load values for ground slopes up to 20% (above 20% consult Michelin)

## 380/80 R38 142A8/139D TL AGRIBIB

MSPN: 36989

CAI: 667404

| Load per tire (single) |                   |                   |                   |                  |                             | Pressure | Tire Technical Data   |                     |                  |                        |   |
|------------------------|-------------------|-------------------|-------------------|------------------|-----------------------------|----------|---|---------------------|------------------|------------------------|---|
| 40 mph<br>65 km/h      | 30 mph<br>50 km/h | 25 mph<br>40 km/h | 20 mph<br>30 km/h | 6 mph<br>10 km/h | 25 mph Dual<br>40 km/h Dual |          |   | Unloaded Dimensions |                  | Loaded Dimensions      |   |
|                        |                   |                   | 2,430 lbs         | 3,410 lbs        | 2,000 lbs                   | 7 psi    | Overall Width   | Overall Diameter    | Loaded Radius    | Rolling Circumference  | <b>DW12A</b><br>W12, DW12,<br>W13, DW13 |
|                        |                   |                   | 1,100 kgs         | 1,545 kgs        | 905 kgs                     | 0.5 bar  | 15.0 in   | 62.1 in             | 28.5 in          | 185.4 in               |   |
| 2,150 lbs              | 2,150 lbs         | 2,760 lbs         | 2,920 lbs         | 4,000 lbs        | 2,400 lbs                   | 9 psi    | 380 mm  | 1,578 mm            | 723 mm           | 4,709 mm               |   |
| 975 kgs                | 975 kgs           | 1,250 kgs         | 1,325 kgs         | 1,815 kgs        | 1,090 kgs                   | 0.6 bar  | Rolling Circumference Index<br>43<br>Number of Lugs<br>23 x 2 |                     |                  |                        |   |
| 2,490 lbs              | 2,490 lbs         | 3,220 lbs         | 3,430 lbs         | 4,600 lbs        | 2,820 lbs                   | 12 psi   |   |                     |                  |                        |   |
| 1,130 kgs              | 1,130 kgs         | 1,460 kgs         | 1,555 kgs         | 2,085 kgs        | 1,280 kgs                   | 0.8 bar  | Gross Flat Plate  | Tire Weight         | 100% Tire Volume | Centerline Tread Depth | Minimum Dual/Triple Spacing             |
| 3,170 lbs              | 3,170 lbs         | 4,140 lbs         | 4,420 lbs         | 5,800 lbs        | 3,640 lbs                   | 15 psi   | 224 sq in   | 205 lbs             | 81.1 gals        | 58/32nd                | 20.0 in                                 |
| 1,440 kgs              | 1,440 kgs         | 1,880 kgs         | 2,005 kgs         | 2,630 kgs        | 1,650 kgs                   | 1.0 bar  | 1,446 sq cm   | 93 kgs              | 307 liters       | 46 mm                  | 507 mm                                  |
| 3,860 lbs              | 3,860 lbs         | 5,070 lbs         | 5,420 lbs         | 6,990 lbs        | 4,460 lbs                   | 17 psi   |   |                     |                  |                        |   |
| 1,750 kgs              | 1,750 kgs         | 2,300 kgs         | 2,460 kgs         | 3,170 kgs        | 2,025 kgs                   | 1.2 bar  |   |                     |                  |                        |   |
| 4,610 lbs              | 4,610 lbs         | 5,460 lbs         | 5,840 lbs         | 7,760 lbs        | 4,810 lbs                   | 20 psi   |   |                     |                  |                        |   |
| 2,090 kgs              | 2,090 kgs         | 2,475 kgs         | 2,650 kgs         | 3,520 kgs        | 2,180 kgs                   | 1.4 bar  |   |                     |                  |                        |   |
| 4,980 lbs              | 4,980 lbs         | 5,640 lbs         | 6,040 lbs         | 8,160 lbs        | 4,970 lbs                   | 23 psi   |   |                     |                  |                        |   |
| 2,260 kgs              | 2,260 kgs         | 2,560 kgs         | 2,740 kgs         | 3,700 kgs        | 2,255 kgs                   | 1.6 bar  |   |                     |                  |                        |   |
| 5,360 lbs              | 5,360 lbs         | 5,840 lbs         | 6,250 lbs         | 8,540 lbs        | 5,140 lbs                   | 25 psi   |   |                     |                  |                        |   |
| 2,430 kgs              | 2,430 kgs         | 2,650 kgs         | 2,835 kgs         | 3,875 kgs        | 2,330 kgs                   | 1.7 bar  |   |                     |                  |                        |   |
|                        |                   |                   | 8,690 lbs         |                  |                             | 26 psi   |   |                     |                  |                        |   |
|                        |                   |                   | 3,940 kgs         |                  |                             | 1.8 bar  |   |                     |                  |                        |   |
|                        |                   |                   | 8,820 lbs         |                  |                             | 28 psi   |   |                     |                  |                        |   |
|                        |                   |                   | 4,000 kgs         |                  |                             | 1.9 bar  |   |                     |                  |                        |   |

\*All load values are for maximum indicated speeds at low torque.

\*20 mph (30 km/h): high torque field work or max road speed.

\*All load values for ground slopes up to 20% (above 20% consult Michelin)

## NOTE:

- When used as duals, tire load carrying capacity must be reduced 12%
- When used as triples, tire load carrying capacity must be reduced 18%





### 380/95 R38 147A8/147B TL AGRIBIB

MSPN: 65207

CAI: 836033

| Load per tire (single) |           |           |            |              |          | *All load values are for maximum indicated speeds at low torque.<br>*20 mph (30 km/h): high torque field work or max road speed.<br>*All load values for ground slopes up to 20% (above 20% consult Michelin) |                  |                   |                        |                                   |
|------------------------|-----------|-----------|------------|--------------|----------|---|------------------|-------------------|------------------------|-----------------------------------|
| 30 mph                 | 25 mph    | 20 mph    | 6 mph      | 25 mph Dual  | Pressure | Tire Technical Data   |                  |                   |                        | Rims<br>(preferred in bold)       |
| 50 km/h                | 40 km/h   | 30 km/h   | 10 km/h    | 40 km/h Dual |          | Unloaded Dimensions   |                  | Loaded Dimensions |                        |                                   |
| 2,680 lbs              | 2,680 lbs | 2,870 lbs | 2,870 lbs  | 2,360 lbs    | 6 psi    | Overall Width   | Overall Diameter | Loaded Radius     | Rolling Circumference  | <b>W12</b><br>W13                 |
| 1,215 kgs              | 1,215 kgs | 1,300 kgs | 1,300 kgs  | 1,070 kgs    | 0.4 bar  | 15.4 in   | 66.5 in          | 30.3 in           | 198.2 in               |                                   |
| 3,740 lbs              | 3,740 lbs | 3,990 lbs | 4,550 lbs  | 3,280 lbs    | 12 psi   | 392 mm  | 1,689 mm         | 769 mm            | 5,034 mm               | Tube MSPN<br>98232                |
| 1,695 kgs              | 1,695 kgs | 1,810 kgs | 2,065 kgs  | 1,490 kgs    | 0.8 bar  | Rolling Circumference Index<br>0  |                  |                   |                        |                                   |
| 4,780 lbs              | 4,780 lbs | 5,130 lbs | 6,240 lbs  | 4,210 lbs    | 17 psi   | Number of Lugs<br>24 x 2  |                  |                   |                        | Minimum<br>Dual/Triple<br>Spacing |
| 2,170 kgs              | 2,170 kgs | 2,325 kgs | 2,830 kgs  | 1,910 kgs    | 1.2 bar  | Gross Flat Plate  | Tire Weight      | 100% Tire Volume  | Centerline Tread Depth |                                   |
| 5,840 lbs              | 5,840 lbs | 6,250 lbs | 7,930 lbs  | 5,140 lbs    | 23 psi   | 235 sq in   | 254 lbs          | 100.6 gals        | 59/32nd                | 20.0 in                           |
| 2,650 kgs              | 2,650 kgs | 2,835 kgs | 3,595 kgs  | 2,330 kgs    | 1.6 bar  | 1,515 sq cm   | 115 kgs          | 381 liters        | 47 mm                  | 507 mm                            |
| 6,070 lbs              | 6,070 lbs | 6,500 lbs | 8,760 lbs  | 5,350 lbs    | 26 psi   |   |                  |                   |                        |                                   |
| 2,755 kgs              | 2,755 kgs | 2,950 kgs | 3,975 kgs  | 2,425 kgs    | 1.8 bar  |   |                  |                   |                        |                                   |
| 6,310 lbs              | 6,310 lbs | 6,750 lbs | 9,040 lbs  | 5,560 lbs    | 29 psi   |   |                  |                   |                        |                                   |
| 2,860 kgs              | 2,860 kgs | 3,060 kgs | 4,100 kgs  | 2,520 kgs    | 2.0 bar  |   |                  |                   |                        |                                   |
| 6,550 lbs              | 6,550 lbs | 7,000 lbs | 9,330 lbs  | 5,750 lbs    | 32 psi   |   |                  |                   |                        |                                   |
| 2,970 kgs              | 2,970 kgs | 3,175 kgs | 4,230 kgs  | 2,610 kgs    | 2.2 bar  |   |                  |                   |                        |                                   |
| 6,780 lbs              | 6,780 lbs | 7,250 lbs | 9,600 lbs  | 5,960 lbs    | 35 psi   |   |                  |                   |                        |                                   |
| 3,075 kgs              | 3,075 kgs | 3,290 kgs | 4,355 kgs  | 2,705 kgs    | 2.4 bar  |   |                  |                   |                        |                                   |
|                        |           |           | 9,890 lbs  |              | 38 psi   |   |                  |                   |                        |                                   |
|                        |           |           | 4,485 kgs  |              | 2.6 bar  |   |                  |                   |                        |                                   |
|                        |           |           | 10,160 lbs |              | 41 psi   |   |                  |                   |                        |                                   |
|                        |           |           | 4,610 kgs  |              | 2.8 bar  |   |                  |                   |                        |                                   |

### 420/85 R38 144A8/144B TL AGRIBIB

MSPN: 84239

CAI: 607820

| Load per tire (single) |           |           |           |              |          | *All load values are for maximum indicated speeds at low torque.<br>*20 mph (30 km/h): high torque field work or max road speed.<br>*All load values for ground slopes up to 20% (above 20% consult Michelin) |                  |                   |                        |                                      |
|------------------------|-----------|-----------|-----------|--------------|----------|---|------------------|-------------------|------------------------|--------------------------------------|
| 30 mph                 | 25 mph    | 20 mph    | 6 mph     | 25 mph Dual  | Pressure | Tire Technical Data   |                  |                   |                        | Rims<br>(preferred in bold)          |
| 50 km/h                | 40 km/h   | 30 km/h   | 10 km/h   | 40 km/h Dual |          | Unloaded Dimensions   |                  | Loaded Dimensions |                        |                                      |
|                        |           | 3,030 lbs | 4,190 lbs | 2,490 lbs    | 6 psi    | Overall Width   | Overall Diameter | Loaded Radius     | Rolling Circumference  | <b>DW15L</b><br>W14L,<br>DW14L, W15L |
|                        |           | 1,375 kgs | 1,900 kgs | 1,130 kgs    | 0.4 bar  | 17.9 in   | 66.0 in          | 29.5 in           | 195.9 in               |                                      |
| 3,420 lbs              | 3,420 lbs | 3,630 lbs | 4,830 lbs | 2,980 lbs    | 9 psi    | 455 mm  | 1,676 mm         | 750 mm            | 4,975 mm               | Tube MSPN<br>69853                   |
| 1,550 kgs              | 1,550 kgs | 1,645 kgs | 2,190 kgs | 1,350 kgs    | 0.6 bar  | Rolling Circumference Index<br>44   |                  |                   |                        |                                      |
| 3,970 lbs              | 3,970 lbs | 4,220 lbs | 5,480 lbs | 3,470 lbs    | 12 psi   | Number of Lugs<br>21 x 2  |                  |                   |                        | Minimum<br>Dual/Triple<br>Spacing    |
| 1,800 kgs              | 1,800 kgs | 1,915 kgs | 2,485 kgs | 1,575 kgs    | 0.8 bar  | Gross Flat Plate  | Tire Weight      | 100% Tire Volume  | Centerline Tread Depth |                                      |
| 4,520 lbs              | 4,520 lbs | 4,830 lbs | 6,120 lbs | 3,970 lbs    | 15 psi   | 290 sq in   | 259 lbs          | 109.6 gals        | 64/32nd                | 22.7 in                              |
| 2,050 kgs              | 2,050 kgs | 2,190 kgs | 2,775 kgs | 1,800 kgs    | 1.0 bar  | 1,874 sq cm   | 118 kgs          | 415 liters        | 51 mm                  | 576 mm                               |
| 5,070 lbs              | 5,070 lbs | 5,420 lbs | 6,760 lbs | 4,450 lbs    | 17 psi   |   |                  |                   |                        |                                      |
| 2,300 kgs              | 2,300 kgs | 2,460 kgs | 3,065 kgs | 2,020 kgs    | 1.2 bar  |   |                  |                   |                        |                                      |
| 5,620 lbs              | 5,620 lbs | 6,020 lbs | 7,410 lbs | 4,940 lbs    | 20 psi   |   |                  |                   |                        |                                      |
| 2,550 kgs              | 2,550 kgs | 2,730 kgs | 3,360 kgs | 2,240 kgs    | 1.4 bar  |   |                  |                   |                        |                                      |
| 6,170 lbs              | 6,170 lbs | 6,610 lbs | 8,050 lbs | 5,430 lbs    | 23 psi   |   |                  |                   |                        |                                      |
| 2,800 kgs              | 2,800 kgs | 3,000 kgs | 3,650 kgs | 2,465 kgs    | 1.6 bar  |   |                  |                   |                        |                                      |
|                        |           |           | 8,450 lbs |              | 25 psi   |   |                  |                   |                        |                                      |
|                        |           |           | 3,835 kgs |              | 1.7 bar  |   |                  |                   |                        |                                      |
|                        |           |           | 8,850 lbs |              | 26 psi   |   |                  |                   |                        |                                      |
|                        |           |           | 4,015 kgs |              | 1.8 bar  |   |                  |                   |                        |                                      |
|                        |           |           | 9,260 lbs |              | 28 psi   |   |                  |                   |                        |                                      |
|                        |           |           | 4,200 kgs |              | 1.9 bar  |   |                  |                   |                        |                                      |

## NOTE:

- When used as duals, tire load carrying capacity must be reduced 12%
- When used as triples, tire load carrying capacity must be reduced 18%



# MICHELIN AGRIBIB

## 18.4 R38 146A8/143B TL AGRIBIB

MSPN: 72676

CAI: 122771

| Load per tire (single)      |                   |                   |                  |                             |  | Pressure | Tire Technical Data  |                     |                     |                           |                                   |                                      |    |  |                |  |        |  |  |  |  |  |
|-----------------------------|-------------------|-------------------|------------------|-----------------------------|--|----------|--|---------------------|---------------------|---------------------------|-----------------------------------|--------------------------------------|----|--|----------------|--|--------|--|--|--|--|--|
| 30 mph<br>50 km/h           | 25 mph<br>40 km/h | 20 mph<br>30 km/h | 6 mph<br>10 km/h | 25 mph Dual<br>40 km/h Dual |  |          | Unloaded Dimensions  |                     | Loaded Dimensions   |                           | Rims<br>(preferred in<br>bold)    |                                      |    |  |                |  |        |  |  |  |  |  |
|                             |                   |                   |                  | 2,630 lbs                   |  | 6 psi    | Overall<br>Width   | Overall<br>Diameter | Loaded<br>Radius    | Rolling<br>Circumference  |                                   | <b>DW16L</b><br>W15L,<br>DW15L, W16L |    |  |                |  |        |  |  |  |  |  |
|                             |                   |                   |                  | 1,195 kgs                   |  | 0.4 bar  | 19.3 in  | 69.7 in             | 31.3 in             | 207.0 in                  |                                   |                                      |    |  |                |  |        |  |  |  |  |  |
|                             |                   | 3,970 lbs         | 5,070 lbs        | 3,210 lbs                   |  | 7 psi    | 491 mm   | 1,770 mm            | 795 mm              | 5,258 mm                  |                                   |                                      |    |  |                |  |        |  |  |  |  |  |
|                             |                   | 1,800 kgs         | 2,300 kgs        | 1,455 kgs                   |  | 0.5 bar  | <table border="1"> <tr> <th colspan="2">Rolling Circumference Index</th> </tr> <tr> <td colspan="2">45</td> </tr> <tr> <th colspan="2">Number of Lugs</th> </tr> <tr> <td colspan="2">21 x 2</td> </tr> </table> |                     |                     |                           | Rolling Circumference Index       |                                      | 45 |  | Number of Lugs |  | 21 x 2 |  |  |  |  |  |
| Rolling Circumference Index |                   |                   |                  |                             |  |          |  |                     |                     |                           |                                   |                                      |    |  |                |  |        |  |  |  |  |  |
| 45                          |                   |                   |                  |                             |  |          |  |                     |                     |                           |                                   |                                      |    |  |                |  |        |  |  |  |  |  |
| Number of Lugs              |                   |                   |                  |                             |  |          |  |                     |                     |                           |                                   |                                      |    |  |                |  |        |  |  |  |  |  |
| 21 x 2                      |                   |                   |                  |                             |  |          |  |                     |                     |                           |                                   |                                      |    |  |                |  |        |  |  |  |  |  |
| 3,970 lbs                   | 4,300 lbs         | 4,610 lbs         | 5,860 lbs        | 3,780 lbs                   |  | 9 psi    |  |                     |                     |                           |                                   |                                      |    |  |                |  |        |  |  |  |  |  |
| 1,800 kgs                   | 1,950 kgs         | 2,090 kgs         | 2,660 kgs        | 1,715 kgs                   |  | 0.6 bar  |  |                     |                     |                           | Tube MSPN<br>67917                |                                      |    |  |                |  |        |  |  |  |  |  |
| 4,380 lbs                   | 4,760 lbs         | 5,100 lbs         | 6,490 lbs        | 4,190 lbs                   |  | 12 psi   |  |                     |                     |                           | Tube CAI<br>170151                |                                      |    |  |                |  |        |  |  |  |  |  |
| 1,985 kgs                   | 2,160 kgs         | 2,315 kgs         | 2,945 kgs        | 1,900 kgs                   |  | 0.8 bar  |  |                     |                     |                           | Minimum<br>Dual/Triple<br>Spacing |                                      |    |  |                |  |        |  |  |  |  |  |
| 4,780 lbs                   | 5,220 lbs         | 5,600 lbs         | 7,110 lbs        | 4,600 lbs                   |  | 15 psi   |  |                     |                     |                           | 24.1 in                           |                                      |    |  |                |  |        |  |  |  |  |  |
| 2,170 kgs                   | 2,370 kgs         | 2,540 kgs         | 3,225 kgs        | 2,085 kgs                   |  | 1.0 bar  |  |                     |                     |                           | 611 mm                            |                                      |    |  |                |  |        |  |  |  |  |  |
| 5,200 lbs                   | 5,690 lbs         | 6,080 lbs         | 7,740 lbs        | 5,000 lbs                   |  | 17 psi   |  |                     |                     |                           |                                   |                                      |    |  |                |  |        |  |  |  |  |  |
| 2,360 kgs                   | 2,580 kgs         | 2,760 kgs         | 3,510 kgs        | 2,270 kgs                   |  | 1.2 bar  |  |                     |                     |                           |                                   |                                      |    |  |                |  |        |  |  |  |  |  |
| 5,610 lbs                   | 6,150 lbs         | 6,580 lbs         | 8,360 lbs        | 5,410 lbs                   |  | 20 psi   |  |                     |                     |                           |                                   |                                      |    |  |                |  |        |  |  |  |  |  |
| 2,545 kgs                   | 2,790 kgs         | 2,985 kgs         | 3,790 kgs        | 2,455 kgs                   |  | 1.4 bar  |  |                     |                     |                           |                                   |                                      |    |  |                |  |        |  |  |  |  |  |
| 6,020 lbs                   | 6,610 lbs         | 7,080 lbs         | 8,980 lbs        | 5,820 lbs                   |  | 23 psi   | Gross<br>Flat Plate  | Tire<br>Weight      | 100% Tire<br>Volume | Centerline<br>Tread Depth |                                   |                                      |    |  |                |  |        |  |  |  |  |  |
| 2,730 kgs                   | 3,000 kgs         | 3,210 kgs         | 4,075 kgs        | 2,640 kgs                   |  | 1.6 bar  | 356 sq in  | 305 lbs             | 151.9 gals          | 68/32nd                   |                                   |                                      |    |  |                |  |        |  |  |  |  |  |
|                             |                   |                   | 9,610 lbs        |                             |  | 26 psi   | 2,297 sq cm  | 138 kgs             | 575 liters          | 54 mm                     |                                   |                                      |    |  |                |  |        |  |  |  |  |  |
|                             |                   |                   | 4,360 kgs        |                             |  | 1.8 bar  |  |                     |                     |                           |                                   |                                      |    |  |                |  |        |  |  |  |  |  |
|                             |                   |                   | 9,920 lbs        |                             |  | 28 psi   |  |                     |                     |                           |                                   |                                      |    |  |                |  |        |  |  |  |  |  |
|                             |                   |                   | 4,500 kgs        |                             |  | 1.9 bar  |  |                     |                     |                           |                                   |                                      |    |  |                |  |        |  |  |  |  |  |

\*All load values are for maximum indicated speeds at low torque.

\*20 mph (30 km/h): high torque field work or max road speed.

\*All load values for ground slopes up to 20% (above 20% consult Michelin)

## 520/85 R38 155A8/155B TL AGRIBIB

MSPN: 43308

CAI: 303668

| Load per tire (single)      |                   |                   |                  |                             |  | Pressure | Tire Technical Data  |                     |                     |                           |                                   |   |    |  |                |  |        |  |  |  |  |
|-----------------------------|-------------------|-------------------|------------------|-----------------------------|--|----------|--|---------------------|---------------------|---------------------------|-----------------------------------|---|----|--|----------------|--|--------|--|--|--|--|
| 30 mph<br>50 km/h           | 25 mph<br>40 km/h | 20 mph<br>30 km/h | 6 mph<br>10 km/h | 25 mph Dual<br>40 km/h Dual |  |          | Unloaded Dimensions  |                     | Loaded Dimensions   |                           | Rims<br>(preferred in<br>bold)    |   |    |  |                |  |        |  |  |  |  |
|                             |                   | 4,190 lbs         | 5,840 lbs        | 3,400 lbs                   |  | 6 psi    | Overall<br>Width   | Overall<br>Diameter | Loaded<br>Radius    | Rolling<br>Circumference  |                                   | <b>DW16L</b><br>W16A, DD16,<br>W18A, DD18 |    |  |                |  |        |  |  |  |  |
|                             |                   | 1,900 kgs         | 2,650 kgs        | 1,540 kgs                   |  | 0.4 bar  | 20.9 in  | 73.0 in             | 32.3 in             | 217.7 in                  |                                   |   |    |  |                |  |        |  |  |  |  |
| 4,670 lbs                   | 4,670 lbs         | 5,070 lbs         | 6,720 lbs        | 4,110 lbs                   |  | 9 psi    | 530 mm   | 1,855 mm            | 821 mm              | 5,529 mm                  |                                   |   |    |  |                |  |        |  |  |  |  |
| 2,120 kgs                   | 2,120 kgs         | 2,300 kgs         | 3,050 kgs        | 1,865 kgs                   |  | 0.6 bar  | <table border="1"> <tr> <th colspan="2">Rolling Circumference Index</th> </tr> <tr> <td colspan="2">46</td> </tr> <tr> <th colspan="2">Number of Lugs</th> </tr> <tr> <td colspan="2">23 x 2</td> </tr> </table> |                     |                     |                           | Rolling Circumference Index       |   | 46 |  | Number of Lugs |  | 23 x 2 |  |  |  |  |
| Rolling Circumference Index |                   |                   |                  |                             |  |          |  |                     |                     |                           |                                   |   |    |  |                |  |        |  |  |  |  |
| 46                          |                   |                   |                  |                             |  |          |  |                     |                     |                           |                                   |   |    |  |                |  |        |  |  |  |  |
| Number of Lugs              |                   |                   |                  |                             |  |          |  |                     |                     |                           |                                   |   |    |  |                |  |        |  |  |  |  |
| 23 x 2                      |                   |                   |                  |                             |  |          |  |                     |                     |                           |                                   |   |    |  |                |  |        |  |  |  |  |
| 5,510 lbs                   | 5,510 lbs         | 5,840 lbs         | 7,610 lbs        | 4,850 lbs                   |  | 12 psi   |  |                     |                     |                           | Tube MSPN<br>80303                |   |    |  |                |  |        |  |  |  |  |
| 2,500 kgs                   | 2,500 kgs         | 2,650 kgs         | 3,450 kgs        | 2,200 kgs                   |  | 0.8 bar  |  |                     |                     |                           | Tube CAI<br>170152                |   |    |  |                |  |        |  |  |  |  |
| 6,170 lbs                   | 6,230 lbs         | 6,720 lbs         | 8,490 lbs        | 5,480 lbs                   |  | 15 psi   |  |                     |                     |                           | Minimum<br>Dual/Triple<br>Spacing |   |    |  |                |  |        |  |  |  |  |
| 2,800 kgs                   | 2,825 kgs         | 3,050 kgs         | 3,850 kgs        | 2,485 kgs                   |  | 1.0 bar  |  |                     |                     |                           | 26.4 in                           |   |    |  |                |  |        |  |  |  |  |
| 6,970 lbs                   | 6,940 lbs         | 7,610 lbs         | 9,370 lbs        | 6,110 lbs                   |  | 17 psi   |  |                     |                     |                           | 670 mm                            |   |    |  |                |  |        |  |  |  |  |
| 3,160 kgs                   | 3,150 kgs         | 3,450 kgs         | 4,250 kgs        | 2,770 kgs                   |  | 1.2 bar  |  |                     |                     |                           |                                   |   |    |  |                |  |        |  |  |  |  |
| 7,750 lbs                   | 7,740 lbs         | 8,360 lbs         | 10,200 lbs       | 6,810 lbs                   |  | 20 psi   |  |                     |                     |                           |                                   |   |    |  |                |  |        |  |  |  |  |
| 3,515 kgs                   | 3,510 kgs         | 3,790 kgs         | 4,625 kgs        | 3,090 kgs                   |  | 1.4 bar  |  |                     |                     |                           |                                   |   |    |  |                |  |        |  |  |  |  |
| 8,540 lbs                   | 8,540 lbs         | 9,090 lbs         | 11,020 lbs       | 7,520 lbs                   |  | 23 psi   | Gross<br>Flat Plate  | Tire<br>Weight      | 100% Tire<br>Volume | Centerline<br>Tread Depth |                                   |   |    |  |                |  |        |  |  |  |  |
| 3,875 kgs                   | 3,875 kgs         | 4,125 kgs         | 5,000 kgs        | 3,410 kgs                   |  | 1.6 bar  | 403 sq in  | 397 lbs             | 179.1 gals          | 64/32nd                   |                                   |   |    |  |                |  |        |  |  |  |  |
|                             |                   |                   | 11,610 lbs       |                             |  | 25 psi   | 2,600 sq cm  | 180 kgs             | 678 liters          | 51 mm                     |                                   |   |    |  |                |  |        |  |  |  |  |
|                             |                   |                   | 5,265 kgs        |                             |  | 1.7 bar  |  |                     |                     |                           |                                   |   |    |  |                |  |        |  |  |  |  |
|                             |                   |                   | 12,200 lbs       |                             |  | 26 psi   |  |                     |                     |                           |                                   |   |    |  |                |  |        |  |  |  |  |
|                             |                   |                   | 5,535 kgs        |                             |  | 1.8 bar  |  |                     |                     |                           |                                   |   |    |  |                |  |        |  |  |  |  |
|                             |                   |                   | 12,790 lbs       |                             |  | 28 psi   |  |                     |                     |                           |                                   |   |    |  |                |  |        |  |  |  |  |
|                             |                   |                   | 5,800 kgs        |                             |  | 1.9 bar  |  |                     |                     |                           |                                   |   |    |  |                |  |        |  |  |  |  |

\*All load values are for maximum indicated speeds at low torque.

\*20 mph (30 km/h): high torque field work or max road speed.

\*All load values for ground slopes up to 20% (above 20% consult Michelin)

## NOTE:

- When used as duals, tire load carrying capacity must be reduced 12%
- When used as triples, tire load carrying capacity must be reduced 18%





## 480/80 R42 156A8/156B TL AGRIBIB

MSPN: 03395

CAI: 404096

| Load per tire (single) |                        |                        |                         |                             |                   | *All load values are for maximum indicated speeds at low torque.<br>*20 mph (30 km/h): high torque field work or max road speed.<br>*All load values for ground slopes up to 20% (above 20% consult Michelin) |                     |                          |                        |                             |
|------------------------|------------------------|------------------------|-------------------------|-----------------------------|-------------------|---|---------------------|--------------------------|------------------------|-----------------------------|
| 30 mph<br>50 km/h      | 25 mph<br>40 km/h      | 20 mph<br>30 km/h      | 6 mph<br>10 km/h        | 25 mph Dual<br>40 km/h Dual | Pressure          | Tire Technical Data   |                     |                          |                        | Rims<br>(preferred in bold) |
|                        |                        | 3,660 lbs<br>1,660 kgs | 5,130 lbs<br>2,325 kgs  | 2,910 lbs<br>1,320 kgs      | 6 psi<br>0.4 bar  | Unloaded Dimensions   |                     | Loaded Dimensions        |                        |                             |
| 4,080 lbs<br>1,850 kgs | 4,080 lbs<br>1,850 kgs | 4,410 lbs<br>2,000 kgs | 5,930 lbs<br>2,690 kgs  | 3,540 lbs<br>1,605 kgs      | 9 psi<br>0.6 bar  | Overall Width   | Overall Diameter    | Loaded Radius            | Rolling Circumference  | Tube MSPN<br>51463          |
| 4,780 lbs<br>2,170 kgs | 4,780 lbs<br>2,170 kgs | 5,150 lbs<br>2,335 kgs | 6,720 lbs<br>3,050 kgs  | 4,170 lbs<br>1,890 kgs      | 12 psi<br>0.8 bar | 19.4 in<br>494 mm   | 73.1 in<br>1,858 mm | 33.4 in<br>847 mm        | 218.0 in<br>5,538 mm   |                             |
| 6,190 lbs<br>2,810 kgs | 6,190 lbs<br>2,810 kgs | 6,650 lbs<br>3,015 kgs | 8,320 lbs<br>3,775 kgs  | 5,430 lbs<br>2,465 kgs      | 17 psi<br>1.2 bar | Rolling Circumference Index   |                     |                          |                        | Minimum Dual/Triple Spacing |
| 7,610 lbs<br>3,450 kgs | 7,610 lbs<br>3,450 kgs | 8,140 lbs<br>3,690 kgs | 9,920 lbs<br>4,500 kgs  | 6,690 lbs<br>3,035 kgs      | 23 psi<br>1.6 bar | 46  |                     |                          |                        |                             |
| 8,210 lbs<br>3,725 kgs | 8,210 lbs<br>3,725 kgs | 8,790 lbs<br>3,985 kgs | 11,020 lbs<br>5,000 kgs | 7,230 lbs<br>3,280 kgs      | 29 psi<br>2.0 bar | Number of Lugs  |                     |                          |                        |                             |
| 8,510 lbs<br>3,860 kgs | 8,510 lbs<br>3,860 kgs | 9,110 lbs<br>4,130 kgs | 11,570 lbs<br>5,250 kgs | 7,500 lbs<br>3,400 kgs      | 32 psi<br>2.2 bar | 24 x 2  |                     |                          |                        |                             |
| 8,820 lbs<br>4,000 kgs | 8,820 lbs<br>4,000 kgs | 9,440 lbs<br>4,280 kgs | 12,130 lbs<br>5,500 kgs | 7,760 lbs<br>3,520 kgs      | 35 psi<br>2.4 bar | Gross Flat Plate  | Tire Weight         | 100% Tire Volume         | Centerline Tread Depth |                             |
|                        |                        |                        | 12,680 lbs<br>5,750 kgs |                             | 38 psi<br>2.6 bar | 318 sq in<br>2,051 sq cm  | 395 lbs<br>179 kgs  | 147.9 gals<br>560 liters | 69/32nd<br>55 mm       |                             |
|                        |                        |                        | 13,230 lbs<br>6,000 kgs |                             | 41 psi<br>2.8 bar |   |                     |                          |                        |                             |

## 520/85 R42 157A8/157B TL AGRIBIB

MSPN: 63687

CAI: 122791

| Load per tire (single) |                        |                        |                         |                             |                   | *All load values are for maximum indicated speeds at low torque.<br>*20 mph (30 km/h): high torque field work or max road speed.<br>*All load values for ground slopes up to 20% (above 20% consult Michelin) |                     |                          |                        |                             |
|------------------------|------------------------|------------------------|-------------------------|-----------------------------|-------------------|---|---------------------|--------------------------|------------------------|-----------------------------|
| 30 mph<br>50 km/h      | 25 mph<br>40 km/h      | 20 mph<br>30 km/h      | 6 mph<br>10 km/h        | 25 mph Dual<br>40 km/h Dual | Pressure          | Tire Technical Data   |                     |                          |                        | Rims<br>(preferred in bold) |
|                        |                        | 4,410 lbs<br>2,000 kgs | 6,170 lbs<br>2,800 kgs  | 3,590 lbs<br>1,630 kgs      | 6 psi<br>0.4 bar  | Unloaded Dimensions   |                     | Loaded Dimensions        |                        |                             |
| 4,940 lbs<br>2,240 kgs | 4,940 lbs<br>2,240 kgs | 5,200 lbs<br>2,360 kgs | 7,110 lbs<br>3,225 kgs  | 4,340 lbs<br>1,970 kgs      | 9 psi<br>0.6 bar  | Overall Width   | Overall Diameter    | Loaded Radius            | Rolling Circumference  | Tube MSPN<br>75465          |
| 5,680 lbs<br>2,575 kgs | 5,680 lbs<br>2,575 kgs | 6,170 lbs<br>2,800 kgs | 8,050 lbs<br>3,650 kgs  | 4,990 lbs<br>2,265 kgs      | 12 psi<br>0.8 bar | 21.2 in<br>539 mm   | 76.6 in<br>1,945 mm | 34.2 in<br>869 mm        | 227.2 in<br>5,771 mm   |                             |
| 6,610 lbs<br>3,000 kgs | 6,530 lbs<br>2,960 kgs | 7,000 lbs<br>3,175 kgs | 8,980 lbs<br>4,075 kgs  | 5,750 lbs<br>2,610 kgs      | 15 psi<br>1.0 bar | Rolling Circumference Index   |                     |                          |                        | Minimum Dual/Triple Spacing |
| 7,390 lbs<br>3,350 kgs | 7,390 lbs<br>3,350 kgs | 7,830 lbs<br>3,550 kgs | 9,920 lbs<br>4,500 kgs  | 6,500 lbs<br>2,950 kgs      | 17 psi<br>1.2 bar | 47  |                     |                          |                        |                             |
| 8,250 lbs<br>3,740 kgs | 8,250 lbs<br>3,740 kgs | 8,730 lbs<br>3,960 kgs | 10,800 lbs<br>4,900 kgs | 7,250 lbs<br>3,290 kgs      | 20 psi<br>1.4 bar | Number of Lugs  |                     |                          |                        |                             |
| 9,090 lbs<br>4,125 kgs | 9,090 lbs<br>4,125 kgs | 9,650 lbs<br>4,375 kgs | 11,680 lbs<br>5,300 kgs | 8,000 lbs<br>3,630 kgs      | 23 psi<br>1.6 bar | 22 x 2  |                     |                          |                        |                             |
|                        |                        |                        | 12,310 lbs<br>5,585 kgs |                             | 25 psi<br>1.7 bar | Gross Flat Plate  | Tire Weight         | 100% Tire Volume         | Centerline Tread Depth |                             |
|                        |                        |                        | 12,930 lbs<br>5,865 kgs |                             | 26 psi<br>1.8 bar | 426 sq in<br>2,750 sq cm  | 447 lbs<br>203 kgs  | 191.7 gals<br>726 liters | 74/32nd<br>59 mm       |                             |
|                        |                        |                        | 13,560 lbs<br>6,150 kgs |                             | 28 psi<br>1.9 bar |   |                     |                          |                        |                             |

**NOTE:**

- When used as duals, tire load carrying capacity must be reduced 12%
- When used as triples, tire load carrying capacity must be reduced 18%





# MICHELIN AGRIBIB

## 420/80 R46 151A8/148B TL AGRIBIB

MSPN: 58733

CAI: 122770

| Load per tire (single) |                   |                   |                  |                             |         | Pressure                          | Tire Technical Data |                  |                        |  |
|------------------------|-------------------|-------------------|------------------|-----------------------------|---------|-----------------------------------|---------------------|------------------|------------------------|--|
| 30 mph<br>50 km/h      | 25 mph<br>40 km/h | 20 mph<br>30 km/h | 6 mph<br>10 km/h | 25 mph Dual<br>40 km/h Dual |         |                                   | Unloaded Dimensions |                  | Loaded Dimensions      |  |
|                        |                   | 3,200 lbs         | 4,410 lbs        | 2,560 lbs                   | 6 psi   | Overall Width                     | Overall Diameter    | Loaded Radius    | Rolling Circumference  | Tube MSPN<br>31525<br>Tube CAI<br>203376<br>Minimum Dual/Triple Spacing<br>21.7 in<br>552 mm |
|                        |                   | 1,450 kgs         | 2,000 kgs        | 1,160 kgs                   | 0.4 bar | 16.1 in                           | 73.7 in             | 33.9 in          | 218.7 in               |  |
| 3,200 lbs              | 3,530 lbs         | 3,750 lbs         | 5,160 lbs        | 3,110 lbs                   | 9 psi   | 410 mm                            | 1,872 mm            | 861 mm           | 5,555 mm               |  |
| 1,450 kgs              | 1,600 kgs         | 1,700 kgs         | 2,340 kgs        | 1,410 kgs                   | 0.6 bar | Rolling Circumference Index<br>46 |                     |                  |                        |  |
| 3,750 lbs              | 4,080 lbs         | 4,410 lbs         | 5,900 lbs        | 3,590 lbs                   | 12 psi  | Number of Lugs<br>26 x 2          |                     |                  |                        |  |
| 1,700 kgs              | 1,850 kgs         | 2,000 kgs         | 2,675 kgs        | 1,630 kgs                   | 0.8 bar | Gross Flat Plate                  | Tire Weight         | 100% Tire Volume | Centerline Tread Depth |  |
| 4,940 lbs              | 5,360 lbs         | 5,680 lbs         | 7,390 lbs        | 4,720 lbs                   | 17 psi  | 274 sq in                         | 315 lbs             | 117.5 gals       | 64/32nd                |  |
| 2,240 kgs              | 2,430 kgs         | 2,575 kgs         | 3,350 kgs        | 2,140 kgs                   | 1.2 bar | 1,769 sq cm                       | 143 kgs             | 445 liters       | 51 mm                  |  |
| 5,840 lbs              | 6,390 lbs         | 6,940 lbs         | 8,820 lbs        | 5,620 lbs                   | 23 psi  |                                   |                     |                  |                        |  |
| 2,650 kgs              | 2,900 kgs         | 3,150 kgs         | 4,000 kgs        | 2,550 kgs                   | 1.6 bar |                                   |                     |                  |                        |  |
| 6,610 lbs              | 7,170 lbs         | 7,610 lbs         | 10,200 lbs       | 6,310 lbs                   | 29 psi  |                                   |                     |                  |                        |  |
| 3,000 kgs              | 3,250 kgs         | 3,450 kgs         | 4,625 kgs        | 2,860 kgs                   | 2.0 bar |                                   |                     |                  |                        |  |
| 6,780 lbs              | 7,390 lbs         | 7,830 lbs         | 10,600 lbs       | 6,500 lbs                   | 32 psi  |                                   |                     |                  |                        |  |
| 3,075 kgs              | 3,350 kgs         | 3,550 kgs         | 4,810 kgs        | 2,950 kgs                   | 2.2 bar |                                   |                     |                  |                        |  |
| 6,940 lbs              | 7,610 lbs         | 8,050 lbs         | 11,020 lbs       | 6,690 lbs                   | 35 psi  |                                   |                     |                  |                        |  |
| 3,150 kgs              | 3,450 kgs         | 3,650 kgs         | 5,000 kgs        | 3,035 kgs                   | 2.4 bar |                                   |                     |                  |                        |  |
|                        |                   |                   | 11,190 lbs       |                             | 38 psi  |                                   |                     |                  |                        |  |
|                        |                   |                   | 5,075 kgs        |                             | 2.6 bar |                                   |                     |                  |                        |  |
|                        |                   |                   | 11,350 lbs       |                             | 41 psi  |                                   |                     |                  |                        |  |
|                        |                   |                   | 5,150 kgs        |                             | 2.8 bar |                                   |                     |                  |                        |  |

\*All load values are for maximum indicated speeds at low torque.

\*20 mph (30 km/h): high torque field work or max road speed.

\*All load values for ground slopes up to 20% (above 20% consult Michelin)

## 480/80 R46 158A8/158B TL AGRIBIB

MSPN: 94069

CAI: 637231

| Load per tire (single) |                   |                   |                  |                             |         | Pressure                          | Tire Technical Data |                  |                        |  |
|------------------------|-------------------|-------------------|------------------|-----------------------------|---------|-----------------------------------|---------------------|------------------|------------------------|--|
| 30 mph<br>50 km/h      | 25 mph<br>40 km/h | 20 mph<br>30 km/h | 6 mph<br>10 km/h | 25 mph Dual<br>40 km/h Dual |         |                                   | Unloaded Dimensions |                  | Loaded Dimensions      |  |
|                        |                   | 3,900 lbs         | 5,460 lbs        | 3,200 lbs                   | 6 psi   | Overall Width                     | Overall Diameter    | Loaded Radius    | Rolling Circumference  | Tube MSPN<br>11549<br>Tube CAI<br>835129<br>Minimum Dual/Triple Spacing<br>25.1 in<br>638 mm |
|                        |                   | 1,770 kgs         | 2,475 kgs        | 1,450 kgs                   | 0.4 bar | 19.6 in                           | 76.7 in             | 35.0 in          | 231.3 in               |  |
| 4,300 lbs              | 4,300 lbs         | 4,650 lbs         | 6,340 lbs        | 3,780 lbs                   | 9 psi   | 499 mm                            | 1,948 mm            | 889 mm           | 5,874 mm               |  |
| 1,950 kgs              | 1,950 kgs         | 2,110 kgs         | 2,875 kgs        | 1,715 kgs                   | 0.6 bar | Rolling Circumference Index<br>47 |                     |                  |                        |  |
| 5,000 lbs              | 5,000 lbs         | 5,390 lbs         | 7,220 lbs        | 4,280 lbs                   | 12 psi  | Number of Lugs<br>25 x 2          |                     |                  |                        |  |
| 2,270 kgs              | 2,270 kgs         | 2,445 kgs         | 3,275 kgs        | 1,940 kgs                   | 0.8 bar | Gross Flat Plate                  | Tire Weight         | 100% Tire Volume | Centerline Tread Depth |  |
| 6,420 lbs              | 6,420 lbs         | 6,890 lbs         | 8,980 lbs        | 5,270 lbs                   | 17 psi  | 349 sq in                         | 402 lbs             | 158.2 gals       | 68/32nd                |  |
| 2,910 kgs              | 2,910 kgs         | 3,125 kgs         | 4,075 kgs        | 2,390 kgs                   | 1.2 bar | 2,251 sq cm                       | 183 kgs             | 599 liters       | 54 mm                  |  |
| 7,830 lbs              | 7,830 lbs         | 8,380 lbs         | 10,750 lbs       | 6,260 lbs                   | 23 psi  |                                   |                     |                  |                        |  |
| 3,550 kgs              | 3,550 kgs         | 3,800 kgs         | 4,875 kgs        | 2,840 kgs                   | 1.6 bar |                                   |                     |                  |                        |  |
| 8,600 lbs              | 8,600 lbs         | 9,200 lbs         | 11,850 lbs       | 7,250 lbs                   | 29 psi  |                                   |                     |                  |                        |  |
| 3,900 kgs              | 3,900 kgs         | 4,175 kgs         | 5,375 kgs        | 3,290 kgs                   | 2.0 bar |                                   |                     |                  |                        |  |
| 8,980 lbs              | 8,980 lbs         | 9,610 lbs         | 12,410 lbs       | 7,750 lbs                   | 32 psi  |                                   |                     |                  |                        |  |
| 4,075 kgs              | 4,075 kgs         | 4,360 kgs         | 5,630 kgs        | 3,515 kgs                   | 2.2 bar |                                   |                     |                  |                        |  |
| 9,370 lbs              | 9,370 lbs         | 10,030 lbs        | 12,960 lbs       | 8,250 lbs                   | 35 psi  |                                   |                     |                  |                        |  |
| 4,250 kgs              | 4,250 kgs         | 4,550 kgs         | 5,880 kgs        | 3,740 kgs                   | 2.4 bar |                                   |                     |                  |                        |  |
|                        |                   |                   | 13,510 lbs       |                             | 38 psi  |                                   |                     |                  |                        |  |
|                        |                   |                   | 6,130 kgs        |                             | 2.6 bar |                                   |                     |                  |                        |  |
|                        |                   |                   | 14,070 lbs       |                             | 41 psi  |                                   |                     |                  |                        |  |
|                        |                   |                   | 6,380 kgs        |                             | 2.8 bar |                                   |                     |                  |                        |  |

\*All load values are for maximum indicated speeds at low torque.

\*20 mph (30 km/h): high torque field work or max road speed.

\*All load values for ground slopes up to 20% (above 20% consult Michelin)

## NOTE:

- When used as duals, tire load carrying capacity must be reduced 12%
- When used as triples, tire load carrying capacity must be reduced 18%





## 520/85 R46 158A8/155B TL AGRIBIB

MSPN: 57479

CAI: 122780

| Load per tire (single) |                        |                         |                         |                             |                   | *All load values are for maximum indicated speeds at low torque.<br>*20 mph (30 km/h): high torque field work or max road speed.<br>*All load values for ground slopes up to 20% (above 20% consult Michelin) |                     |                          |                        |                             |
|------------------------|------------------------|-------------------------|-------------------------|-----------------------------|-------------------|---|---------------------|--------------------------|------------------------|-----------------------------|
| 30 mph<br>50 km/h      | 25 mph<br>40 km/h      | 20 mph<br>30 km/h       | 6 mph<br>10 km/h        | 25 mph Dual<br>40 km/h Dual | Pressure          | Tire Technical Data   |                     |                          |                        | Rims<br>(preferred in bold) |
|                        |                        | 4,610 lbs<br>2,090 kgs  | 6,390 lbs<br>2,900 kgs  | 3,780 lbs<br>1,715 kgs      | 6 psi<br>0.4 bar  | Unloaded Dimensions   |                     | Loaded Dimensions        |                        |                             |
| 4,670 lbs<br>2,120 kgs | 5,070 lbs<br>2,300 kgs | 5,510 lbs<br>2,500 kgs  | 7,330 lbs<br>3,325 kgs  | 4,520 lbs<br>2,050 kgs      | 9 psi<br>0.6 bar  | Overall Width   | Overall Diameter    | Loaded Radius            | Rolling Circumference  | Tube MSPN<br>11549          |
| 5,450 lbs<br>2,470 kgs | 5,930 lbs<br>2,690 kgs | 6,420 lbs<br>2,910 kgs  | 8,270 lbs<br>3,750 kgs  | 5,270 lbs<br>2,390 kgs      | 12 psi<br>0.8 bar | 20.3 in<br>515 mm   | 80.7 in<br>2,050 mm | 36.2 in<br>920 mm        | 239.7 in<br>6,088 mm   |                             |
| 6,220 lbs<br>2,820 kgs | 6,790 lbs<br>3,080 kgs | 7,320 lbs<br>3,320 kgs  | 9,200 lbs<br>4,175 kgs  | 6,020 lbs<br>2,730 kgs      | 15 psi<br>1.0 bar | Rolling Circumference Index   |                     |                          |                        | Minimum Dual/Triple Spacing |
| 7,000 lbs<br>3,175 kgs | 7,650 lbs<br>3,470 kgs | 8,220 lbs<br>3,730 kgs  | 10,140 lbs<br>4,600 kgs | 6,760 lbs<br>3,065 kgs      | 17 psi<br>1.2 bar | 48  |                     |                          |                        |                             |
| 7,770 lbs<br>3,525 kgs | 8,510 lbs<br>3,860 kgs | 9,130 lbs<br>4,140 kgs  | 11,080 lbs<br>5,025 kgs | 7,500 lbs<br>3,400 kgs      | 20 psi<br>1.4 bar | Number of Lugs  |                     |                          |                        |                             |
| 8,540 lbs<br>3,875 kgs | 9,370 lbs<br>4,250 kgs | 10,030 lbs<br>4,550 kgs | 12,020 lbs<br>5,450 kgs | 8,250 lbs<br>3,740 kgs      | 23 psi<br>1.6 bar | 22 x 2  |                     |                          |                        |                             |
|                        |                        |                         | 12,700 lbs<br>5,760 kgs |                             | 25 psi<br>1.7 bar | Gross Flat Plate  | Tire Weight         | 100% Tire Volume         | Centerline Tread Depth |                             |
|                        |                        |                         | 13,380 lbs<br>6,070 kgs |                             | 26 psi<br>1.8 bar | 441 sq in<br>2,844 sq cm  | 485 lbs<br>220 kgs  | 204.7 gals<br>775 liters | 73/32nd<br>58 mm       |                             |
|                        |                        |                         | 14,070 lbs<br>6,380 kgs |                             | 28 psi<br>1.9 bar |   |                     |                          |                        |                             |
|                        |                        |                         |                         |                             |                   |   |                     |                          |                        |                             |

## 480/80 R50 159A8/159B TL AGRIBIB

MSPN: 94576

CAI: 471947

| Load per tire (single) |                        |                         |                         |                             |                   | *All load values are for maximum indicated speeds at low torque.<br>*20 mph (30 km/h): high torque field work or max road speed.<br>*All load values for ground slopes up to 20% (above 20% consult Michelin) |                     |                          |                        |                             |
|------------------------|------------------------|-------------------------|-------------------------|-----------------------------|-------------------|---|---------------------|--------------------------|------------------------|-----------------------------|
| 30 mph<br>50 km/h      | 25 mph<br>40 km/h      | 20 mph<br>30 km/h       | 6 mph<br>10 km/h        | 25 mph Dual<br>40 km/h Dual | Pressure          | Tire Technical Data   |                     |                          |                        | Rims<br>(preferred in bold) |
|                        |                        | 3,970 lbs<br>1,800 kgs  | 5,680 lbs<br>2,575 kgs  | 3,300 lbs<br>1,495 kgs      | 6 psi<br>0.4 bar  | Unloaded Dimensions   |                     | Loaded Dimensions        |                        |                             |
| 4,540 lbs<br>2,060 kgs | 4,540 lbs<br>2,060 kgs | 4,810 lbs<br>2,180 kgs  | 6,600 lbs<br>2,995 kgs  | 4,000 lbs<br>1,815 kgs      | 9 psi<br>0.6 bar  | Overall Width   | Overall Diameter    | Loaded Radius            | Rolling Circumference  | Tube MSPN                   |
| 5,200 lbs<br>2,360 kgs | 5,200 lbs<br>2,360 kgs | 5,680 lbs<br>2,575 kgs  | 7,520 lbs<br>3,410 kgs  | 4,570 lbs<br>2,075 kgs      | 12 psi<br>0.8 bar | 18.7 in<br>474 mm   | 80.9 in<br>2,056 mm | 37.1 in<br>942 mm        | 241.5 in<br>6,135 mm   |                             |
| 6,780 lbs<br>3,075 kgs | 6,780 lbs<br>3,075 kgs | 7,170 lbs<br>3,250 kgs  | 9,370 lbs<br>4,250 kgs  | 5,960 lbs<br>2,705 kgs      | 17 psi<br>1.2 bar | Rolling Circumference Index   |                     |                          |                        | Minimum Dual/Triple Spacing |
| 8,270 lbs<br>3,750 kgs | 8,270 lbs<br>3,750 kgs | 8,820 lbs<br>4,000 kgs  | 11,350 lbs<br>5,150 kgs | 7,280 lbs<br>3,300 kgs      | 23 psi<br>1.6 bar | 48  |                     |                          |                        |                             |
| 9,090 lbs<br>4,125 kgs | 9,090 lbs<br>4,125 kgs | 9,650 lbs<br>4,375 kgs  | 13,230 lbs<br>6,000 kgs | 8,000 lbs<br>3,630 kgs      | 29 psi<br>2.0 bar | Number of Lugs  |                     |                          |                        |                             |
| 9,370 lbs<br>4,250 kgs | 9,370 lbs<br>4,250 kgs | 9,920 lbs<br>4,500 kgs  | 13,560 lbs<br>6,150 kgs | 8,250 lbs<br>3,740 kgs      | 32 psi<br>2.2 bar | 26 x 2  |                     |                          |                        |                             |
| 9,650 lbs<br>4,375 kgs | 9,650 lbs<br>4,375 kgs | 10,200 lbs<br>4,625 kgs | 13,890 lbs<br>6,300 kgs | 8,490 lbs<br>3,850 kgs      | 35 psi<br>2.4 bar | Gross Flat Plate  | Tire Weight         | 100% Tire Volume         | Centerline Tread Depth |                             |
|                        |                        |                         | 14,110 lbs<br>6,400 kgs |                             | 38 psi<br>2.6 bar | 360 sq in<br>2,322 sq cm  | 441 lbs<br>200 kgs  | 168.8 gals<br>639 liters | 71/32nd<br>56 mm       |                             |
|                        |                        |                         | 14,330 lbs<br>6,500 kgs |                             | 41 psi<br>2.8 bar |   |                     |                          |                        |                             |
|                        |                        |                         |                         |                             |                   |   |                     |                          |                        |                             |

**NOTE:**

- When used as duals, tire load carrying capacity must be reduced 12%
- When used as triples, tire load carrying capacity must be reduced 18%



# MICHELIN AGRIBIB

## 480/95 R50 164A8/164B TL AGRIBIB

MSPN: 54736

CAI: 491183

| Load per tire (single)      |                   |                   |                  |                             |  | Pressure | Tire Technical Data   |                  |                   |                        |                                |                               |                |        |  |
|-----------------------------|-------------------|-------------------|------------------|-----------------------------|--|----------|---|------------------|-------------------|------------------------|--------------------------------|-------------------------------|----------------|--------|--|
| 30 mph<br>50 km/h           | 25 mph<br>40 km/h | 20 mph<br>30 km/h | 6 mph<br>10 km/h | 25 mph Dual<br>40 km/h Dual |  |          | Unloaded Dimensions   |                  | Loaded Dimensions |                        | Rims<br>(preferred in<br>bold) |                               |                |        |  |
|                             |                   | 4,600 lbs         | 6,450 lbs        | 3,790 lbs                   |  | 6 psi    | Overall Width   | Overall Diameter | Loaded Radius     | Rolling Circumference  |                                | <b>DW16B (A)</b><br>DW15B (A) |                |        |  |
|                             |                   | 2,085 kgs         | 2,925 kgs        | 1,720 kgs                   |  | 0.4 bar  | 20.3 in   | 85.6 in          | 39.1 in           | 255.3 in               |                                |                               |                |        |  |
| 5,200 lbs                   | 5,200 lbs         | 5,570 lbs         | 7,210 lbs        | 4,590 lbs                   |  | 9 psi    | 515 mm  | 2,175 mm         | 992 mm            | 6,484 mm               |                                |                               |                |        |  |
| 2,360 kgs                   | 2,360 kgs         | 2,525 kgs         | 3,270 kgs        | 2,080 kgs                   |  | 0.6 bar  | <table border="1"> <tr> <td>Rolling Circumference Index</td> </tr> <tr> <td>0</td> </tr> <tr> <td>Number of Lugs</td> </tr> <tr> <td>28 x 2</td> </tr> </table> |                  |                   |                        | Rolling Circumference Index    | 0                             | Number of Lugs | 28 x 2 |  |
| Rolling Circumference Index |                   |                   |                  |                             |  |          |   |                  |                   |                        |                                |                               |                |        |  |
| 0                           |                   |                   |                  |                             |  |          |   |                  |                   |                        |                                |                               |                |        |  |
| Number of Lugs              |                   |                   |                  |                             |  |          |   |                  |                   |                        |                                |                               |                |        |  |
| 28 x 2                      |                   |                   |                  |                             |  |          |   |                  |                   |                        |                                |                               |                |        |  |
| 6,100 lbs                   | 6,100 lbs         | 6,510 lbs         | 8,330 lbs        | 5,370 lbs                   |  | 12 psi   |   |                  |                   |                        |                                |                               |                |        |  |
| 2,765 kgs                   | 2,765 kgs         | 2,955 kgs         | 3,780 kgs        | 2,435 kgs                   |  | 0.8 bar  |   |                  |                   |                        |                                |                               |                |        |  |
| 7,870 lbs                   | 7,870 lbs         | 8,420 lbs         | 10,570 lbs       | 6,920 lbs                   |  | 17 psi   |   |                  |                   |                        |                                |                               |                |        |  |
| 3,570 kgs                   | 3,570 kgs         | 3,820 kgs         | 4,795 kgs        | 3,140 kgs                   |  | 1.2 bar  |   |                  |                   |                        |                                |                               |                |        |  |
| 9,650 lbs                   | 9,650 lbs         | 10,320 lbs        | 12,810 lbs       | 8,490 lbs                   |  | 23 psi   |   |                  |                   |                        |                                |                               |                |        |  |
| 4,375 kgs                   | 4,375 kgs         | 4,680 kgs         | 5,810 kgs        | 3,850 kgs                   |  | 1.6 bar  |   |                  |                   |                        |                                |                               |                |        |  |
| 10,340 lbs                  | 10,340 lbs        | 11,060 lbs        | 14,460 lbs       | 9,090 lbs                   |  | 29 psi   |   |                  |                   |                        |                                |                               |                |        |  |
| 4,690 kgs                   | 4,690 kgs         | 5,015 kgs         | 6,560 kgs        | 4,125 kgs                   |  | 2.0 bar  |   |                  |                   |                        |                                |                               |                |        |  |
| 10,680 lbs                  | 10,680 lbs        | 11,420 lbs        | 15,290 lbs       | 9,390 lbs                   |  | 32 psi   |   |                  |                   |                        |                                |                               |                |        |  |
| 4,845 kgs                   | 4,845 kgs         | 5,180 kgs         | 6,935 kgs        | 4,260 kgs                   |  | 2.2 bar  |   |                  |                   |                        |                                |                               |                |        |  |
| 11,020 lbs                  | 11,020 lbs        | 11,790 lbs        | 16,120 lbs       | 9,700 lbs                   |  | 35 psi   | Gross Flat Plate  | Tire Weight      | 100% Tire Volume  | Centerline Tread Depth | Minimum Dual/Triple Spacing    |                               |                |        |  |
| 5,000 kgs                   | 5,000 kgs         | 5,350 kgs         | 7,310 kgs        | 4,400 kgs                   |  | 2.4 bar  | 413 sq in   | 507 lbs          | 208.9 gals        | 67/32nd                | 25.1 in                        |                               |                |        |  |
|                             |                   |                   | 16,330 lbs       |                             |  | 38 psi   | 2,662 sq cm   | 230 kgs          | 791 liters        | 53 mm                  | 638 mm                         |                               |                |        |  |
|                             |                   |                   | 7,405 kgs        |                             |  | 2.6 bar  |   |                  |                   |                        |                                |                               |                |        |  |
|                             |                   |                   | 16,530 lbs       |                             |  | 41 psi   |   |                  |                   |                        |                                |                               |                |        |  |
|                             |                   |                   | 7,500 kgs        |                             |  | 2.8 bar  |   |                  |                   |                        |                                |                               |                |        |  |

\*All load values are for maximum indicated speeds at low torque.

\*20 mph (30 km/h): high torque field work or max road speed.

\*All load values for ground slopes up to 20% (above 20% consult Michelin)