

HD+ 90i VV-HF


Tandem roller with two vibrating roller drums
Tandem rollers Series HD+ / Series H242









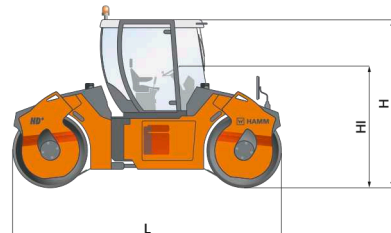



HIGHLIGHTS HD+

- > 3-point articulation for even weight distribution and excellent directional stability
- > Operating concept Easy Drive
- > Electronic machine management Hammtronic
- > Excellent view of machine and construction site
- > Track offset for comfortable starting and driving away and compacting at curbsides

Machine dimensions		
Total length (L)	mm • in	4900 • 192.9
Width (B)	mm • in	1800 • 70.9
Total height (H)	mm • in	2980 • 117.3
Drum width (X)	mm • in	1680/1680 • 66.1/66.1
Height, loading, min. (HI)	mm • in	2150 • 84.6



EU Stage
IV/EPA Tier
4

TECHNICAL DATA		Unit	HD+ 90i VV-HF
	Weights		
	Operating weight with cab	kg • lbs	9320 • 20,551
	Operating weight with ROPS	kg • lbs	9150 • 20,176
	Operating weight, max.	kg • lbs	11860 • 26,151
	Static linear load, front/rear	kg/cm • lbs/in	28,1/27,4 • 157.4/153.4
	French classific., data/class		19,5/VT0
	Machine dimensions		
	Total length	mm • in	4900 • 192.9
	Total height with cab	mm • in	2980 • 117.3
	Height, loading, min.	mm • in	2150 • 84.6
	Wheelbase	mm • in	3700 • 145.7
	Total width with cab	mm • in	1800 • 70.9
	Max. working width	mm • in	1850 • 72.8
	Curb clearance, left/right	mm • in	800/800 • 31.5/31.5
	Turning radius, inside	mm • in	6050 • 238.2
	Drum dimensions		
	Drum width, front/rear	mm • in	1680/1680 • 66.1/66.1
	Drum diameter, front/rear	mm • in	1200/1200 • 47.2/47.2
	Drum thickness, front/rear	mm • in	17/17 • 0.7/0.7
	Drum type, front		Smooth/non-split
	Drum type, rear		Smooth/non-split
	Track offset, left/right	mm • in	170 • 6.7
	Diesel engine		
	Manufacturer		DEUTZ
	Type		TCD 3.6 L4
	Number of cylinders		4
	Power rat. ISO 14396, kW/PS/rpm		85,0/115,6/2300
	Power rating SAE J1349, kW/HP/rpm		85,0/113,9/2300
	Emission standard		EU Stage IV/EPA Tier 4
	Exhaust gas after-treatment		DOC-SCR
	Drive		
	Speed, working gear	km/h • mph	0-6,5 • 0.0-4.0
	Speed, transportation gear	km/h • mph	0-12,0 • 0.0-7.5
	Regulation, infinitely variable		Hammtronic
	Climbing ability, vibration on/off	%	35/40
	Vibration		
	Vibration frequency, front, I/II	Hz • vpm	45/67 • 2,700/4,020
	Vibration frequency, rear, I/II	Hz • vpm	45/67 • 2,700/4,020
	Amplitude, front, I/II	mm • in	0,48/0,27 • .019/.011
	Amplitude, rear, I/II	mm • in	0,48/0,27 • .019/.011
	Centrifugal force, front, I/II	kN • lbs	67/84 • 15,075/18,900
	Centrifugal force, rear, I/II	kN • lbs	67/84 • 15,075/18,900
	Steering		
	Oscillation angle +/-	°	10
	Steering, type		Articulated steering
	Sprinkler system		
	Water sprinkler, type		Pressure
	Tank capacity/Fill capacity		
	Fuel tank, capacity	L • Gal	173 • 45.7
	AdBlue/DEF tank, content	L • Gal	20 • 5.3
	Water tank, capacity	L • Gal	760 • 200.8
	Sound level		
	Acoustic power LW(A), sticker		107
	Acoustic power LW(A), measured		106

EQUIPMENT
 12 V outlet, 2 large working and rear view mirrors, Foldable scraper, Operating concept Easy Drive, Pressure water sprinkling with interval switch, ECO mode, Operator's platform with entry from both sides, Speed-controlled water sprinkling system, Speed preselect, Vibration-isolated operator's platform, Spray system with spray bars front and rear, Track offset, hydraulic, Water filtering (triple), Water tank front and rear, can be filled from both sides, Central water drain, Handrail at operator's platform

OPTIONAL EQUIPMENT
 ROPS, rigid, Heating, Multifunction armrest, right, foldable, Steering column with comfort exit and tiltable dashboard, Radio, HCQ navigator, Protective roof, Edge pressing and cutting equipment, Chip spreader, Anti-freeze injection, Frequency control, Speedometer, Automatic engine-off function, HAMM Temperature Meter (HTM), Track offset display, Back-up alarm, Working light, Rotating beacon, Drum edge lighting, Coming home lighting

WIRTGEN AMERICA
 6030 Dana Way
 Antioch, TN 37013
 Phone +1 615-501-0600
 Fax +1 615-501-0691
 info.america@wirtgen-group.com
 www.wirtgen-group.com/america

HAMM AG
 Hammstraße 1
 D-95643 Tirschenreuth
 Tel +49 9631 80-0
 Fax +49 9631 80-111
 www.hamm.eu

