

KUBOTA WHEEL LOADER

R420α/R520α



Kubota

Powerful, versatile, and comfortable, our wheel loaders deliver optimum performance across a range of applications.

You name it—loading, backfilling, dozing, grappling, plowing, scraping—and the R420 α and R520 α wheel loaders can handle it. Enabling them to take on the widest range of jobs is a host of innovative features. Features such as power steering and compact size for easy navigation of any hard-to-reach site. A high reach and dump clearance, plus self-levelling bucket for easy and efficient operation. An oscillating body, long wheelbase, and limited slip differential for greater stability and stronger traction. Not to mention comfortable and safe operation with features such as a suspension seat, unobstructed visibility, low sound/vibration levels, ROPS/FOPS, lever locks, and more.



Highest dumping clearance

For easy dumping, even into trucks with high beds, the Kubota R420 α and R520 α have one of the highest dumping clearances in their class.



Self-levelling bucket (optional equipment)

For smooth, efficient operation of the bucket, this innovative feature enables the bucket to automatically level itself whenever it's being lowered—eliminating the need for precise adjusting.



Independent 2-system-type brake

A hydraulic main brake and a mechanical-type parking brake offer a high level of control. To ensure responsiveness even in mud, their wet-discs are protected by being completely sealed.

ROPS/FOPS cab and canopy

Superior protection is provided by a Roll-Over Protective Structure and Falling Object Protective Structure. Both ROPS and FOPS meet the strictest ISO standards. To let you work longer and with less fatigue, our cab is spacious and comfortable.



Fully adjustable suspension seat

To provide a high level of comfort to a wide range of operators, the suspension seat adjusts according to the operator's weight, plus has hip support and recline. A retractable safety belt ensures operator safety.



Lower sound and vibration

To enhance operator comfort, the Kubota R420α and R520α utilise a new engine mount design, a helical gear, and an F-shaped fan to significantly reduce overall noise and vibration.

Load sensing transmission with low-speed hold switch

This feature enables our wheel loaders to automatically shift from low speed/high torque to high speed/low torque as load conditions vary.

For optimal operation in tight spaces, the travel speed limiter reduces maximum travel speed with just a touch of a button, while maintaining full performance of the auxiliary hydraulics.



Responsive power steering

You'll work longer and manoeuvre easier, even in tight spaces, with smooth-operating, light-touch power steering.




Long wheelbase

A long wheelbase, plus an oscillating body, enables the machine to keep its traction force more stable even on rough terrain, so jobs can be performed more comfortably.

Limited Slip Differential

Kubota's 4WD lets you outmuscle challenging terrain, such as mud and sand. And if one front wheel loses grip, the limited slip differential transfers that wheel's power to the opposite wheel to restore traction.

100% of available power to both drive wheels.

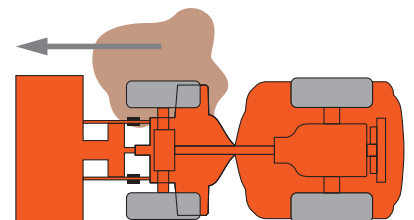

Automatic parking brake

This safety feature automatically engages the parking brake whenever the engine is turned off. Particularly useful when our wheel loaders are parked on steep slopes or transported by truck.



Hanging-style foot pedals

For increased foot space and a cleaner floorboard appearance, the Kubota R420 α and R520 α wheel loaders are equipped with hanging-style foot pedals.



Backhoe

Quick couplers and auxiliary hydraulics make it simple to attach numerous versatile attachments, such as a backhoe, and more.

Auxiliary hydraulics—a standard feature

With the hydraulic valve and the control lever built-in, you'll save time and money whenever you need to hook up a hydraulically operated attachment.

Kubota M-type engine

Kubota's E-TVCS engine combines a dual-element air cleaner for enhanced durability and environmentally-friendly operation* with all the impressive qualities that have always been associated with the Kubota name—impressive power, high reliability, fuel efficiency, and low vibration.

* Complies with E.P.A. Tier II standards.

Exceptional serviceability

From simple daily maintenance to more complex repairs, a lockable, wide-opening, flip-up engine cover provides easy access to most areas of the wheel loader's engine. Standard engine features include a dual element air cleaner and a water separator.






Safety Starting System

To prevent mishaps, our Safety Start System will not allow the engine to start until the electric shuttle shift is in neutral and the parking brake is applied.

SPECIFICATIONS

WORKING RANGE

Model		R420 α	R520 α		
Engine	Model	Kubota			
	Type	D1503-M-T-E2RP-1	V2203-M-E2RP		
	Output	kW/rpm	29/2600	33/2600	
		PS/rpm	40/2600	45/2600	
	Number of cylinders	3	4		
Displacement	cc	1499	2197		
Dimensions	Overall height (canopy/cabin)	mm A	2615/2570	2685/2640	
	Overall length	mm B	4470	4840	
	Overall width	mm C	1520	1760	
	Height to hinge pin	mm D	2810	3310	
	Dump angle fully raised	E	43°	41°	
	Dump height	mm F	2110	2580	
	Reach fully raised	mm G	770		
	Wheelbase	mm H	1775	1950	
	Ground clearance	mm I	280	325	
	Tread	mm J	1180	1360	
	Angle of articulation (each way)	K	40°		
	Operational Specifications (with standard bucket)	Standard bucket capacity	m ³	0,40	0,65
		Bucket breakout force	daN (kgf)	2920 (2980)	3310 (3375)
Tipping Load, straight (ISO 8313) (canopy/cab)		kg	2000/2370	2590/2920	
Tipping Load, full turn (ISO 8313) (canopy/cab)		kg	1700/2010	2200/2480	
Max. Lifting Capacity (ISO 8313)		daN (kgf)	1770 (1800)	2320 (2370)	
Loader raise time		sec	4,4	4,5	
Loader lower time		sec	3,7	3,6	
Bucket dump time		sec	1,2		
Draw bar pull		daN (kgf)	2350 (2400)	3140 (3200)	
Operating weight (canopy/cabin)		kg	3040/3360	3980/4300	
		with backhoe (canopy/cab)	kg	3380/3700	3800/4120
Standard tires			12,5/70-16-8PR	15,5/60-18-8PR	
Operational Specifications (with fork)	Tipping Load, full turn (ISO 8313)	kg	1240/1460	1420/1970	
	Max. Payload (EN474-3) 80%	kg	950/1150	1100/1550	
	Max. Payload (EN474-3) 60%	kg	700/850	850/1150	
Drive train	Transmission	Load Sensing Transmission			
	Travel speed	km/h	0~20		
	Brakes	Service	Enclosed, Self adjusting Wet Disc		
		Parking	Spring Applied, Hydraulic Released Wet Disc		
Fluid refill	Fuel tank	ℓ	54		
	Hydraulic system	ℓ	60	62	
	Hydraulic reservoir	ℓ	42		
Backhoe Specifications	Reach from centerline of swing pivot	mm A	3700		
	Overall operating height	mm B	3220		
	Loading height	mm C	2040		
	Digging depth (Maximum)	mm D	2750		
	Side shift	mm	1000		
	Digging force bucket	kg	1860		
Digging force dipperstick cylinder	kg	1250			

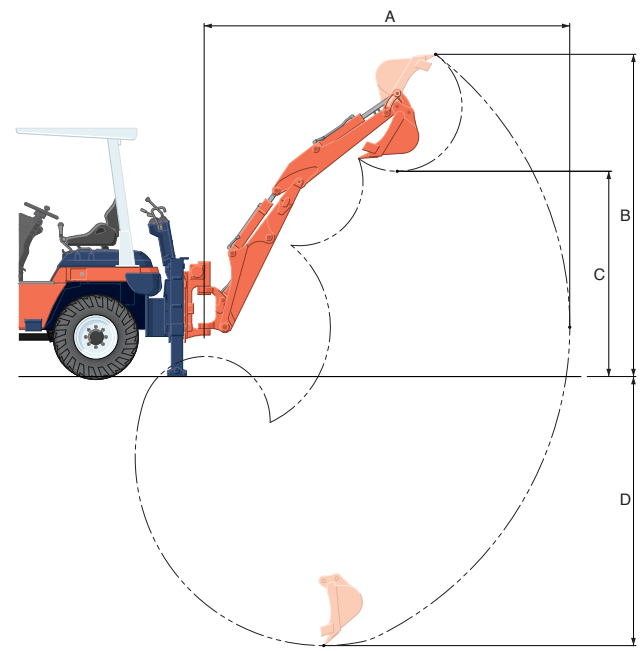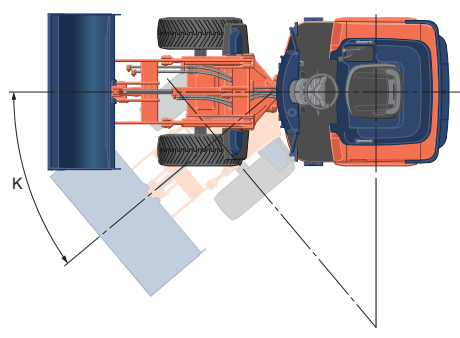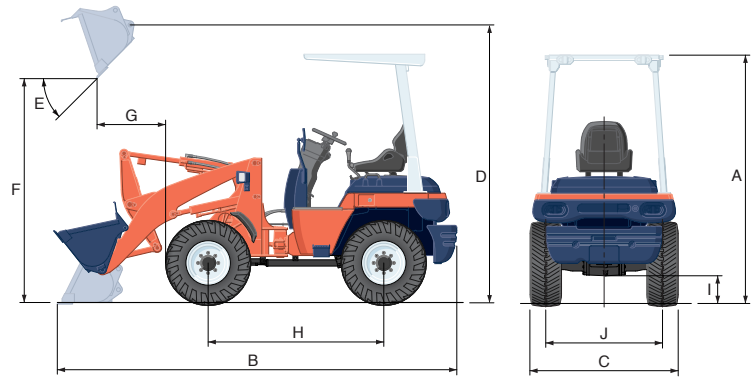

NOTE : Above dimensions are based on the machine with Quick Coupler made in Germany, Standard Bucket, Weight and ROPS/FOPS Canopy and Cab. Mean Value and value for use on concrete roads are given for tipping load and operating load. Specifications Subject to change without Notice.

KUBOTA EUROPE S.A.S.
 19 à 25, Rue Jules - Verceyruisse -
 Zone Industrielle - B.P. 50088 95101
 Argenteuil Cedex France
 Téléphone : (33) 01 34 26 34 34
 Télécopieur : (33) 01 34 26 34 99