


Production series:

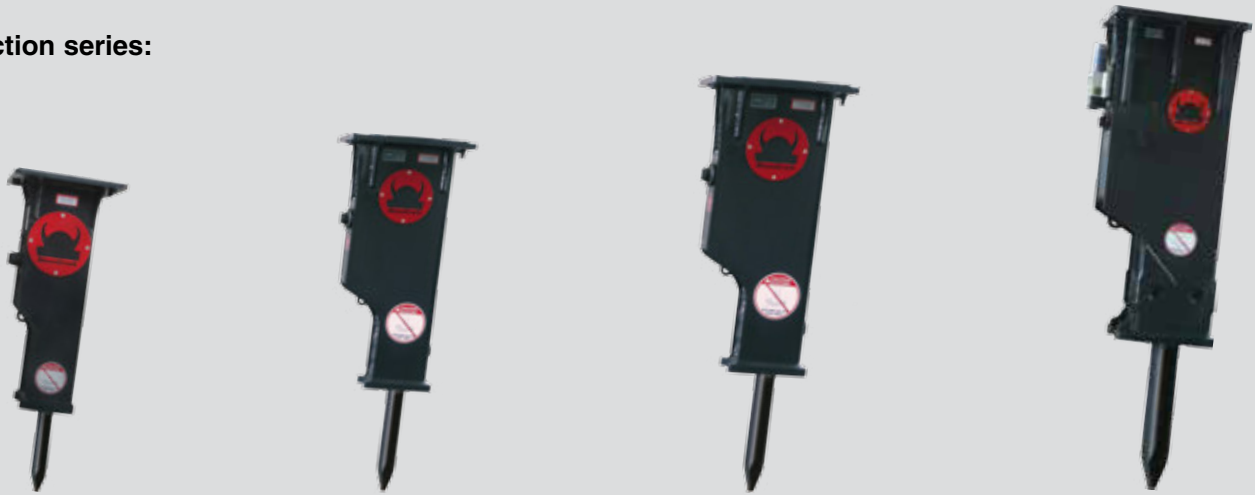

Central lubrication is necessary for more convenient maintenance and is for a small additional charge available.

Technical data

Type	operating weight kg	weight machine to.	impact energy joule	oil flow l/min	operating pressure bar	blow rate per min.	chisel Ø mm	relief setting pressure bar
SCB 2	120	0,8-2,5	177	15-30	90-120	550-1100	45	175
SCB 3	140	1-3	343	23-45	90-120	450-1000	57	175
SCB 4	180	1,5-4	392	26-50	100-140	450-1000	57	175
SCB 5	250	2-4,5	696	30-60	110-165	550-1100	70	175
SCB 6	270	3-6,5	890	35-70	110-165	380-1000	70	175
SCB 7	310	3-6,5	910	35-70	110-165	380-1000	70	175
SCB 8	340	4,5-8	1000	40-80	120-165	380-900	75	175
SCB 9	500	4,5-8	1200	45-90	140-170	400-1100	80	175
SCB 10	550	6-10	1480	50-100	140-170	350-1000	90	175
SCB 13	850	8-12,5	2200	75-120	140-180	350-900	95	175
SCB 15	950	10,5-15	2600	80-140	140-180	350-900	105	210
SCB 18	1200	13-18	3800	100-150	160-190	320-900	115	210
SCB 22	1500	16-22	3900	100-155	160-190	320-800	125	210
SCB 24	1600	18-24	4600	120-170	160-190	320-800	135	210
SCB 26	1850	20-26	5400	140-190	160-190	340-800	135	210
SCB 30	2100	25-30	7250	150-210	160-190	300-720	145	210
SCB 36	2400	25-36	8800	180-240	160-190	250-650	150	210
SCB 42	2800	28-42	11000	200-260	160-190	230-600	155	210
SCB 50	3500	34-50	12500	220-280	160-190	230-600	165	210
SCB 60	4000	40-60	15500	240-320	160-190	230-550	175	210
SCB 100	7000	60-100	22500	360-450	160-190	200-450	205	210

