

TF Range of Hedge and Verge Cutters

- 5.0m (16ft 6in) reach
- Parallel arm geometry
- 1.2m cut flailhead (belt drive)
- Totally independent hydraulics
- 3-point linkage mounted (Cat II)
- Machine weight 1000kg
- 140 litre capacity
- 240° head rotation
- Cast iron pumps and motor
- Mechanical safety breakback
- Cable controls or proportional controls
- Head float
- Dual direction flail rotation
- Cab safety guard kit
- Bar stabiliser kit
- Oil included
- Minimum tractor requirement

60hp, 2250kg.



Controls




Cable Controls




Low Pressure Hydraulic Proportional Joystick

Cutting Dimensions

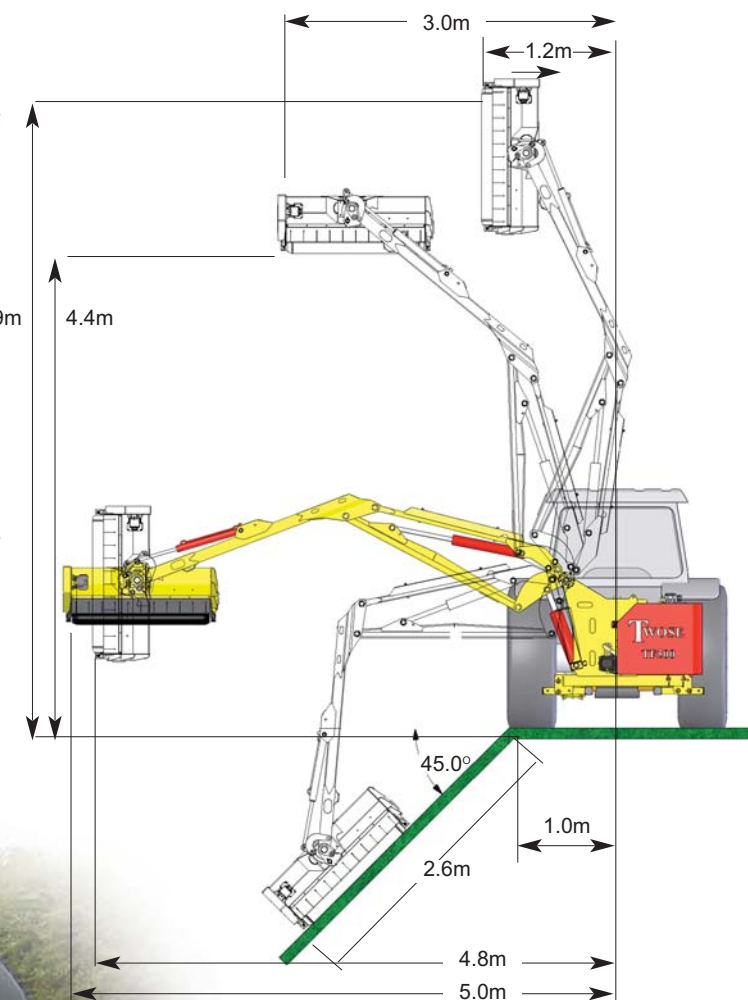

Double Skin Cutter Head

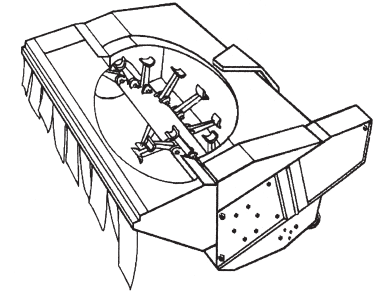

- Double skin for greater strength and longer working life.
- Drive line contained within width of skid for a cleaner cut and better manoeuvrability.
- Simple belt adjustment
- Quick fit heavy duty rotor takes 5 types of flail
- Heavy braced end panels
- Adjustable heavy duty roller
- Skid wrapped around panel for greater protection
- Nose guard with barbed wire trap and heavy duty curtain
- Choice of flails



Heavy Duty Reversible Lump Flail for hedging and occasional mowing. Fitted as standard unless stated



Heavy Duty Grass and hedging flail. Cuts in one direction



Back to Back reversible flail for grass cutting



Cast Boot Flail and shackle for mowing or hedging. Cuts in one direction only



Back to Back reversible flail and shackle for grass cutting

Machine Type	TF500
Reach (m / ft, ins)	5.0 / 16'6"
Cutting width (m)	1.2
Minimum tractor power (hp)	60
Left or right cut	Optional
Parallel arm geometry	Standard
Mechanical safety breakaway	Standard
Flail cutting reversible by cable control	Standard
Fully Independent Hydraulics	Standard
Cable controls	Standard
Low pressure hydraulic joystick	Optional
Flotation	
Head flotation	Standard
Boom flotation	Optional