

ZOOMLION

ARTICULATING BOOM LIFTS

ZA14JE

Comply with CE/ANSI/GB Standard



HIGHLIGHTS

ZA14JE

- Center layout, great structural rigidity, and small boom deflection.

- Advanced dual control system (valve control + pump control) offers a energy-saving and smooth control.

- Accurate and efficient traveling AC drive system provides strong power and stable control.

FEATURES

Standard Features

- Proportional control
- All motion alarm
- Flashing amber beacon
- Self-closing entry gate
- Emergency descent system
- Emergency stop button
- Auto-leveling system
- On-board diagnostic system
- Over tilt protection system
- Load sensing system
- 4.3' LED display
- Horn

Accessories & Options

- AC power to platform
- Airline to platform
- Non-marking tire

ACCESS WITH ZOOMLION GREEN




Hotline: +86 400-800-0157
E-mail: awm@zoomlion.com

Add: ZOOMLION Wangcheng Industrial Park, Tengfei Road 997, Changsha, Hunan, China.
Learn more at <http://en.zoomlion.com/>

ELECTRIC ARTICULATING BOOM LIFTS

Comply with CE/ANSI/GB Standard

Model	ZA14JE
Size	
Work Height	16 m
Platform Height	14 m
Horizontal Outreach	7.50 m
Up and Over Height	7.74 m
A - Stowed Length	6.6 m
B - Stowed Width	1.75 m
C - Stowed Height	2 m
D - Platform Length	1.52 m
E - Platform Width	0.76 m
F - Wheelbase	2.05 m
G - Ground Clearance	200 mm
Performance	
Platform Capacity	230 kg
Drive Speed	6.1km/h
Gradeability	30% (17°)
Axles Oscillation	
Turning Radius (Inside)	0.79 m
Turning Radius (Outside)	3.15 m
Swing	360°continuous
Platform Rotation	±90°
H-Tail Swing	0 m
Max. Working Slope	2 / 4°
Max. Wind Speed	12.5 m/s
Power	
Battery	8 × 6 V / 420 Ah
Charger	48 V / 60 A
Drive Motor	AC 3 2 V / 3.3 kw
Lift Motor	DC 48 V / 5 kw
Auxiliary Power	Manual Pump
Hydraulic Tank Capacity	30 L
Tire	
Type	17.5 × 6.75 Foam-filled Tires
Weight	
Gross	6800 kg

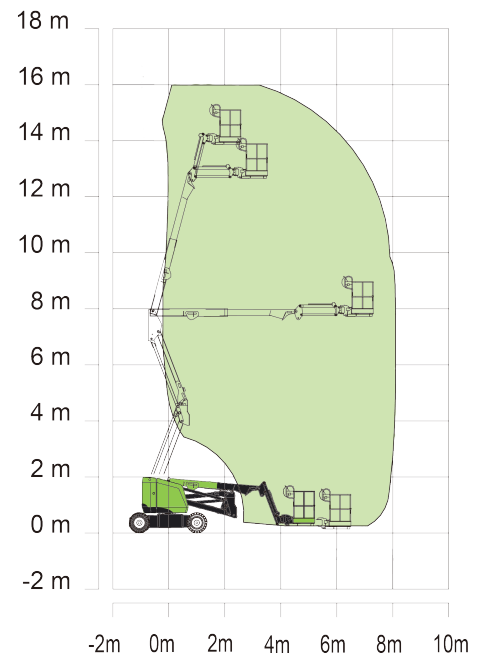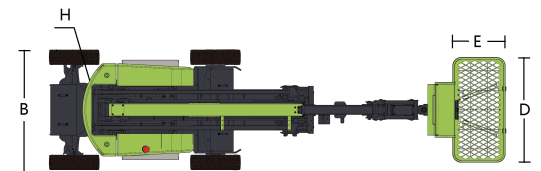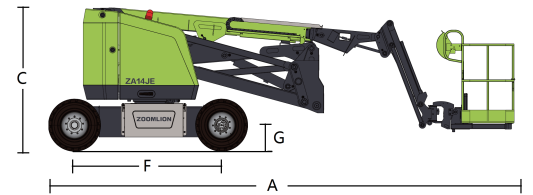

Range of Motion ZA14JE