

ARTICULATED TRUCK MOUNTED PLATFORM SPECIFICATION




TECHNICAL DATA

- Main boom articulated + one (01) arm
- 360° continuous turret rotation on bearing turntable
- Proportional controls from the ground and in the basket; both full hydraulic
- Engine start/stop controls from the basket and from the turret
- Basket dimensions: 1400x700x1100mm
- Basket rotation +/- 65°
- Basket base in composite material with aluminium guard-rail
- Nr. 4 (four) hydraulic outriggers
HS + HS/narrow straight down type
- Automatic hydraulically actioned levelling basket
- Electric system: 12V or 24V
- Emergency manual pump
- 230V AC EC electrical socket in the basket
- Standard boom colours:
blue (RAL 5017) or white (RAL 9010)

AVAILABLE OPTIONS

- 12 or 24V working light
- Hour meter
- Load cell in the basket
- VTR fiberglass basket; the lift capacity will be 200kg

DIMENSIONS

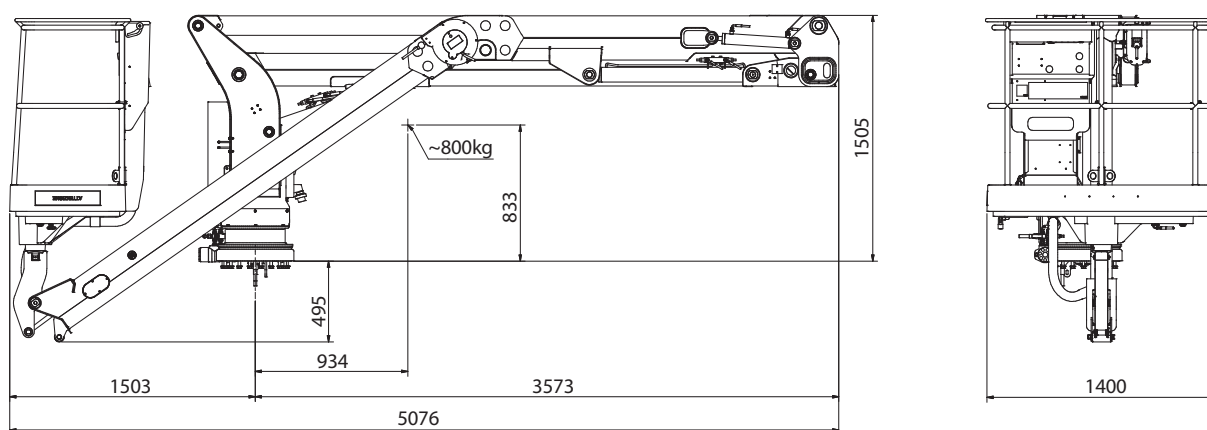

CTE S.p.A.

Headquarter

7 Via Caproni - Rovereto (TN) IT, 38068

Ph. +39 0464 48.50.50 - Fax +39 0464 48.50.99

info@ctelift.com - www.ctelift.com

Factory 5 Loc. Terramatta - Rivoli Veronese (VR) IT, 37010

CTE UK Ltd Enderby Leicestershire - UK

ARTICULATED TRUCK MOUNTED PLATFORM SPECIFICATION

CTEZED 14.2

PERFORMANCE



14 m*



230 kg**



1300x700x1100 mm



5,70 m*




12 m

GVW min 5,0 t

* outreach and height max values and repeatability can change within $\pm 3\%$ due to manufacturing variation and working condition.

** 200 kg with fiberglass basket

WORKING ENVELOPE

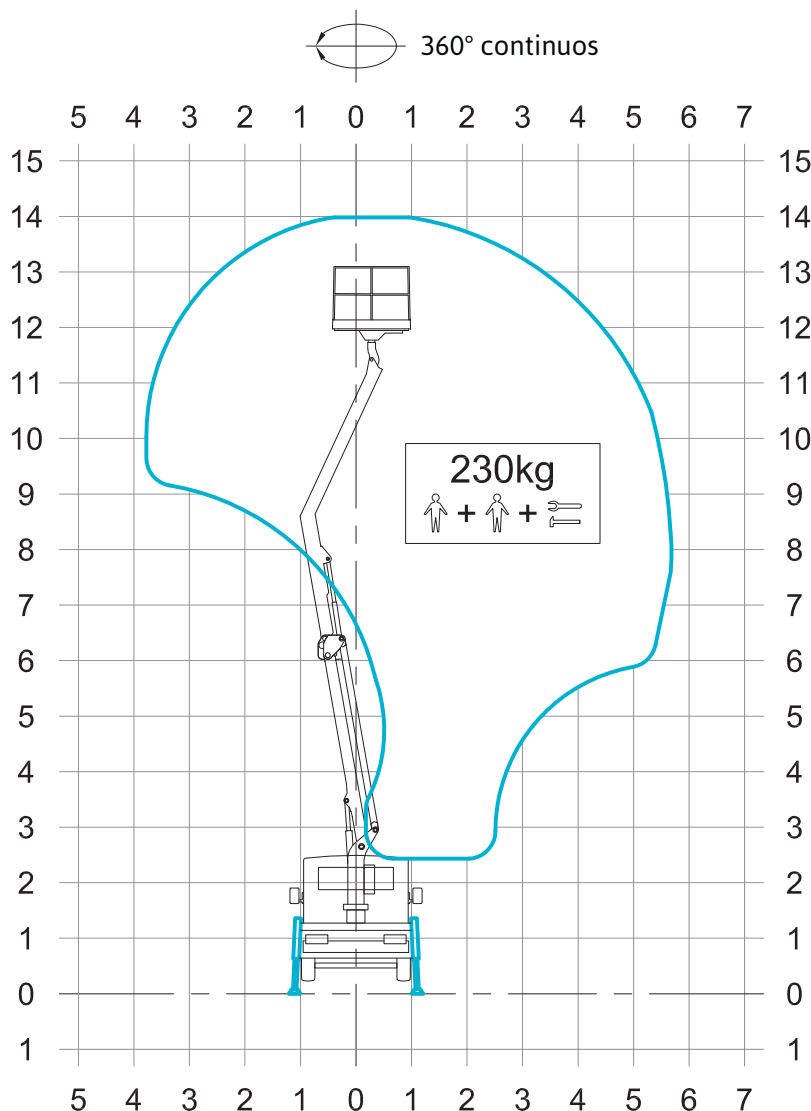

Product specifications are subject to change without notice or obligation. Technical features and drawings in this brochure are for illustrative purposes only. _ZED 14.2 - ed. 02/19



CTE S.p.A.
Headquarter

7 Via Caproni - Rovereto (TN) IT, 38068
Ph. +39 0464 48.50.50 - Fax +39 0464 48.50.99
info@ctelift.com - www.ctelift.com

Factory 5 Loc. Terramatta - Rivoli Veronese (VR) IT, 37010

CTE UK Ltd Enderby Leicestershire - UK

