


MODEL RANGE

NEW FH Battery Electric 6x2 Tag Tractor - Full Air Suspension FH 62T TE

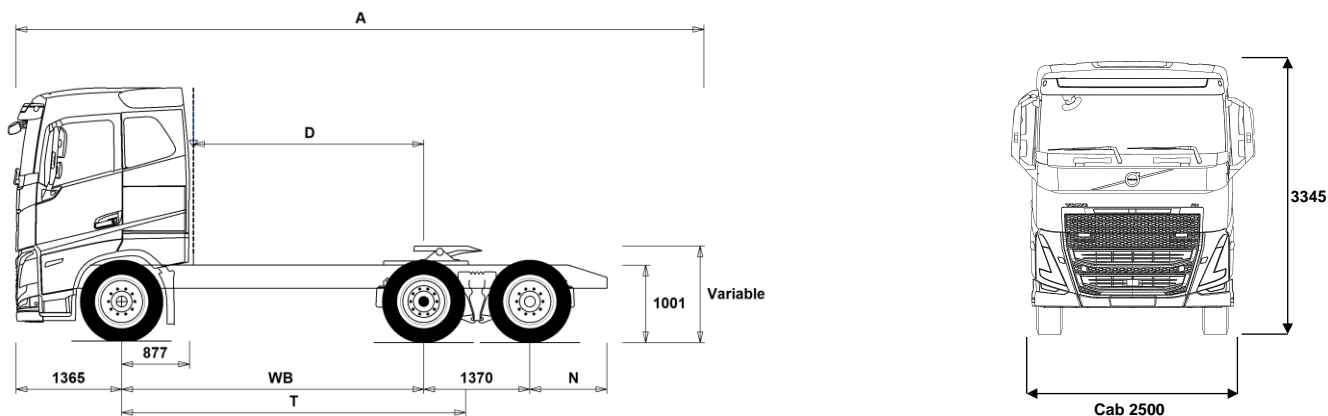

Chassis Dimensions [mm]

WB Wheelbase	3900
A Overall Chassis Length	8882
D Center of rear axle to back of cab	2973
N Rear Overhang (Min.)	590
N Rear Overhang (Max.)	995
F Fifth Wheel Position (EC Directive 96/53)	775
T Theoretical Wheelbase	4441

Chassis Weights [kg]

Front Axle	6390
Rear Bogie	4760
Kerb Weight	11150

Turning Diameter [mm]

Turning Circle Diameter Kerb to Kerb	15600
Turning Circle Diameter Wall to Wall	17000

Plated Weights [kg]

	Plated	Design
Gross Vehicle Weight	26000	27500
Gross Combination Weight	44000	44000
Front Axle	8000	8500
Rear Bogie	19000	19000

Important Notes

Chassis Dimensions

Cab Height: +375 mm for CAB-HSLP, -203 mm for CAB-LSLP, +517 mm for CAB-XHSL.

D-measure includes a front clearance of 50 mm and for rigid trucks also a subframe of 100 mm.

Height can vary ± 20 mm for leaf and ± 10 mm for air suspension.

All dimensions are for unladen chassis and any tag axles down. Chassis height used: CHH-MED.

Height change when chassis height CHH-HIGH: 0 mm.

Weight and dimensions are based upon the following tyres:

Front Axle Tyres:	315/80R22.5
Drive Axle Tyres:	315/80R22.5
Trailing/Pusher Axle Tyres:	315/80R22.5

Chassis weight includes oil, water, AdBlue, 0 litres fuel and without driver. Kerb weight can vary ± 10%.

Turning diameters are theoretically calculated. Tag axle used: TA-FIXED.

Legal weights can differ from country to country.

For more detailed weight information, including optional equipment weights, ask your Volvo sales contact to enter your specification into the Volvo Weight Information system (WIS).

Do NOT use this drawing for bodybuilding. Refer to Volvo Bodybuilder Instructions and chassis assembly drawing FH62TTE.

MODEL RANGE

NEW FH Battery Electric 6x2 Tag Tractor - Full Air Suspension FH 62T TE

TRUCK USE

- **RC-SMOOT** Road Conditions - Smooth

CORE COMPONENTS

- CHH-HIGH** Chassis Height - High - for loading heights check the unique BEP chassis drawing attached to this quote
- CHH-MED** Chassis Height - Medium - for loading heights check the unique BEP chassis drawing attached to this quote
- TAG-FIXD** Tag axle - Fixed with twin tyres on tag axle
- **TAG-FIXS** Tag axle - Fixed with single tyres on tag axle
- **RADT-GR** Rear air suspension, 2 axles - 1 driven/1 tag
- FHE-HSLP** Cab - Globetrotter - all-steel safety cage design with a roof-mounted emergency escape hatch. Designed and built to Swedish impact and ECE R29 regulations
- FHE-LSLP** Cab - Low sleeper - with steel safety cage design. Designed and built to Swedish impact and ECE R29 regulations
- **FHE-SLP** Cab - Sleeper - all-steel safety cage design with a roof-mounted emergency escape hatch. Designed and built to Swedish impact and ECE R29 regulations
- FHE-XHSL** Cab - Globetrotter XL - all-steel safety cage design with a roof-mounted emergency escape hatch. Designed and built to Swedish impact and ECE R29 regulations
- **EPT2412** Gearbox - I-shift Automated 12-speed - suitable for gross train weights up to 44tonne
- **NEM3** Electric Motors - 3 - Output 490 kW – 666hp continuous power
- RSS1344C** Drive Axle - RS1344C single reduction with differential lock - design GCW 44 tonne
- **RSS1344E** Drive Axle - RSS1344E single reduction with differential lock - design GCW 44 tonne
- RSS1370A** Drive Axle - RSS1370A single reduction 13 tonne with differential lock - design GCW 70 tonne

PACKAGES

- **INFONDF** Media Information Platform with Navigation & Volvo Connect "On board" Support
- DRIV-E** Cab Package - Drive
- DRIV-E+** Cab Package - Drive +
- DRIV-E++** Cab Package - Drive +
- 1LIV-E** Sleep & Resting Package - Living one-bed
- 1LIV-E+** Sleep & Resting Package - Living one-bed +
- 1LIV-E++** Sleep & Resting Package - Living one-bed ++
- 2LIV-E** Sleep & Resting Package - Living two-bed
- 2LIV-E+** Sleep & Resting Package - Living two-bed +
- 2LIV-E++** Sleep & Resting Package - Living two-bed ++
- SAFE-E** Active safety package
- SAFE-E+** Active safety package +
- **RANGOPT5** Range Optimisation Package - 5 years prepaid subscription

CHASSIS

- **FST-AIR** Front suspension type - Air
- **FSLs-BAS** Front suspension levelling - basic stroke
- FAL10.0** Front axle design capacity - 10 tonne - check tyre capacity
- **FAL8.5** Front axle design capacity - 8.5 tonnes
- FAL9.0** Front axle design capacity - 9.0 tonne - check tyre capacity
- FSTAB** Front anti-roll bar - Normal stiffness
- **FSTAB2** Front anti-roll bar - Medium stiffness
- FSTAB3** Front anti-roll bar - High stiffness
- **RAL19** Rear bogie design capacity - 19 tonne
- RAL20.5** Rear bogie design capacity - 20.5 tonne
- RAL22.5** Rear bogie design capacity - 22.5 tonne
- **RSTAB1** Rear anti-roll bar - Normal stiffness
- RSTAB2** Rear anti-roll bar - Medium stiffness

- RSTAB3** Rear anti-roll bar - Stiff
- RALIM10** Rear-axle load limiter - 10 tonne
- RALIM105** Rear-axle load limiter - 10.5 tonne - speed controlled
- **RALIM115** Rear-axle load limiter -11.5 tonne - speed controlled
- RALIM20** Rear-axle load limiter - 20 tonne
- RALIM95** Rear-axle load limiter - 9.5 tonne
- **ASF-DL1** Air suspension with 1 driving level
- ASF-DLL** Air suspension with automatically lowered drive height over 60km/h
- **ACTST-TO** Active Steering- Volvo Dynamic Steering - VDS - with extra electronic pump and torque overlay
- ASFE-BAS** Active steering feature - Basic - Volvo Dynamic Steering - VDS - only
- ASFE-OG** Active steering feature - Volvo Dynamic Steering - VDS - with stability assist - oversteer
- ASFE-PO** Active steering feature - Volvo Dynamic Steering - VDS - with personal settings and stability assist
- ASFE-PS** Active steering feature - Volvo Dynamic Steering - VDS - with personal settings
- **RST-AIR** Rear suspension type - Air
- RST-AIR4** Rear suspension type - Air with reinforced air bellows
- **FRAME300** Chassis frame section external height - 300 mm
- **FST8080** Chassis frame thickness - 8 mm web and flange
- FIL-EEEB** Chassis frame inner liner - From the end of the engine to the end of the bogie
- **FIL-TXEB** Chassis frame inner liner - From gearbox member to the end of the bogie
- **BBOX-EF** Battery box position - End of the frame in rear overhang
- **BATTAMP** Battery management - Voltage and current gauge
- BATTIND** Battery management - Voltage, current and charge indicators
- WHC-FOL1** One foldable wheel chock
- WHC-FOL2** Two foldable wheel chocks
- WHCP-F** Wheel chock carrier position - In the front part of the vehicle
- WHCP-T** Wheel chock carrier position - Outer luggage locker
- CHAIN-S** Snow chains
- HOOK-SC** Snow chain hooks
- **TOWF-NO1** Front towing device - One detachable - stored in cab
- TOWF-NO2** Front towing device - Two detachable - stored in cab
- TOWR-ONE** Towing hitch attached to rear crossmember
- **TREL15** Trailer electrical connection - Single 15 pin - ADR certified
- **TREL7-7** Trailer electrical connection - 2 x 7 pin - 24N and 24S
- TBC-DUO** Trailer brake connections - Duomatic type
- TBC-EC** Trailer brake connections - EC palm coupling connectors
- **TBC-GBR** Trailer brake connections - 'C' and 'CA' type
- TRBR-HCF** Full pressure hand controlled trailer brake
- **TRBR-STA** Stationary trailer brake control
- TRB-STRE** Stretch Brake - Automatic low speed trailer brake activation to avoid jack-knifing and improve steerability
- **RFEND-B** Rear mud wings - Three piece EC approved and spray flaps
- **RFH-BAS** Basic rear wing height
- RFH-HIG** High rear wing height - higher wing tops
- RFH-LOW** Lower rear wing height - shallower wing tops
- **BLIGHT-E** Emergency brake light

WHEELS & TYRES

- **RT-AL** Wheels - Alcoa brushed aluminium rims - standard holes for long stud fixing
- RT-ALDP** Wheels - Alcoa Dura-Bright aluminium rims - standard holes for long stud fixing
- RT-ALDPD** Wheels - Alcoa Dura-Bright EVO aluminium rims - countersunk holes for short stud fixing

- Standard Equipment
- Optional Equipment

For more detailed information about cab and powertrain equipment, please refer to separate specification sheets.

For all possible options and combinations of options please consult your Volvo sales contact who can create a specification to match your requirements using the Volvo Sales Support system (VSS).

The factory reserves the right to modify design and change equipment without previous notification. The specification can vary from country to country.

MODEL RANGE

NEW FH Battery Electric 6x2 Tag Tractor - Full Air Suspension FH 62T TE

<input type="checkbox"/> RT-ALDU	Wheels - Alcoa brushed aluminium rims - countersunk holes for short stud fixing	<input checked="" type="checkbox"/> CU-ECC	Cab Climate Unit - Electrically controlled air conditioning with sun sensor
<input type="checkbox"/> RT-STEEL	Wheels - Steel rims	<input type="checkbox"/> CU-ECC2	Cab Climate Unit - Electrically controlled air conditioning with a carbon filter, sun, mist, and air quality sensor
<input type="checkbox"/> SPWT-D	Spare wheel & tyre with rear tyre pattern	<input checked="" type="checkbox"/> IMMOBIL	Thatcham H2 approved immobiliser
<input type="checkbox"/> SPWT-F	Spare wheel & tyre with front tyre pattern	<input type="checkbox"/> ALARM-E	Enhanced vehicle alarm - Thatcham H1 approved - Cab plus external sensor for body/trailer
<input type="checkbox"/> SWCP-T	Spare wheel supplied temporarily strapped to chassis	<input type="checkbox"/> AMPL400	Radio amplifier, 8 channel, 400 W with subwoofer Located in right hand external storage box
<input type="checkbox"/> SWCP-TP	Temporary spare wheel carrier on top of chassis frame	<input checked="" type="checkbox"/> BUPMON	Back up monitor - Digital reverse camera, parameter & lead supplied loose in cab.
<input type="checkbox"/> JACK-12T	12 tonne bottle jack	<input type="checkbox"/> ISUNS-BS	Side sun visor - Driver & passenger side
<input type="checkbox"/> JACK-15T		<input checked="" type="checkbox"/> ISUNS-DS	Side sun visor - Driver-side
<input type="checkbox"/> JACK-20T		<input type="checkbox"/> ISUNF-RE	Electrically operated textile interior sun blind
<input checked="" type="checkbox"/> TOOL-BAS	Basic Toolkit	<input checked="" type="checkbox"/> ISUNF-RM	Manually operated textile interior sun blind
<input type="checkbox"/> TOOLKIT	Complete tool kit	<input checked="" type="checkbox"/> CSPL-BX	Lower center dash open storage box
<input type="checkbox"/> INFLAHOS	Tyre inflation hose	<input type="checkbox"/> CSPL-BXD	Lower centre dash drawer
<input type="checkbox"/> GAUGE-TP	Tyre pressure gauge	<input type="checkbox"/> ADFS	Two extra DIN slots in front shelf - can be fitted with card or drawer available as an accessory
DRIVELINE EQUIPMENT			
<input checked="" type="checkbox"/> DRM-BE	Drive Mode - Balanced & Economy	<input checked="" type="checkbox"/> BUPALARM	Reverse alarm
<input checked="" type="checkbox"/> PVT-MAP	I-See Predictive Cruise Control - using map based topography information	<input type="checkbox"/> RTOLL-PK	Road toll PREPARATION kit for trucks operating with "Toll Collect" in Germany
<input type="checkbox"/> EP400A	Electric Power Outlet Voltage - 400V AC	<input checked="" type="checkbox"/> LOADIND	Load indicator with central dashboard display
<input type="checkbox"/> PTR-D	Gearbox PTO for plug-in pump, 0.71xeng speed	<input type="checkbox"/> REMC-MF	Multi-functio wireless remote control
<input type="checkbox"/> PTR-DH	Gearbox driven high speed PTO for one plug-in hydraulic pump	<input checked="" type="checkbox"/> FIREXT3S	Fire extinguisher - 3kg mounted on the seat base
<input type="checkbox"/> PTR-DM	Gearbox driven medium speed PTO for one plug-in hydraulic pump	<input type="checkbox"/> WARNVEST	High visibility warning vest - no sleeves
<input type="checkbox"/> PTR-F	Gearbox driven PTO with rear flange connection	<input checked="" type="checkbox"/> WARNTRI2	Roadside hazard warning triangle
<input type="checkbox"/> PTR-FH	Gearbox driven high speed PTO with SAE drive flange	<input type="checkbox"/> AIDKIT	First aid kit - Legal demand for EU markets including delivery to EU bodybuilder
<input type="checkbox"/> PTR-FL	Gearbox driven low speed PTO with SAE drive flange	<input type="checkbox"/> AIDKIT1B	First aid kit - Legal demand for trucks transiting Germany
<input type="checkbox"/> PTRD-D	Gearbox driven HIGH SPEED PTO for two plug-in hydraulic pumps	<input type="checkbox"/> WARNLAMP	Portable warning lamp
<input type="checkbox"/> PTRD-D1	PTRD-D1 Gearbox driven HIGH SPEED PTO (1 SAE flange & 1 plug-in hydraulic pump)	<input type="checkbox"/> LAMP-IN	Inspection lamp
<input type="checkbox"/> PTRD-D2	Gearbox driven HIGH SPEED PTO (2 SAE flanges & 1 plug-in hyd pump)	<input type="checkbox"/> BULBKIT	Bulb and fuse kit
<input type="checkbox"/> PTRD-F	PTO with 1 DIN + 1 flange connection rear, manual gearbox	<input type="checkbox"/> WRITEPAD	Writing pad
<input type="checkbox"/> HPG-F101	Parker F1-101 gearbox mounted, fixed displacement, single flow, hydraulic pump	<input checked="" type="checkbox"/> DST-CF4	Driver seat - Suspended, adjustable shock absorber, travel, backrest & lumbar controls with integrated seatbelt
<input type="checkbox"/> HPG-F41	Parker F1-41 gearbox mounted, fixed displacement, single flow, hydraulic pump	<input type="checkbox"/> DST-CF5	Driver seat - Suspended with adjustable shock absorber, travel, backrest, lumbar & heat controls with integrated seatbelt
<input type="checkbox"/> HPG-F51	Parker F1-51 gearbox mounted, fixed displacement, single flow, hydraulic pump	<input type="checkbox"/> DST-CF6	Driver seat - Suspended with adjustable shock absorber, travel, backrest, lumbar, heat and ventilation controls with integrated seatbelt
<input type="checkbox"/> HPG-F61	Parker F1-61 gearbox mounted, fixed displacement, single flow, hydraulic pump	<input type="checkbox"/> DST-LUX1	Driver seat - Deluxe 1: electrical adjustment with memory function, lumbar support, heating & ventilation with integrated seatbelt
<input type="checkbox"/> HPG-F81	Parker F1-81 gearbox mounted, fixed displacement, single flow, hydraulic pump	<input type="checkbox"/> DST-LUX2	Driver seat - Deluxe 2: electrical adjustment with memory function, lumbar support & heating with integrated seatbelt
<input checked="" type="checkbox"/> CRUIS-E	Eco cruise control (with eco-roll and l-cruise, controls in steering wheel)	<input type="checkbox"/> SBD-RED	Seat belt colour - Red
<input checked="" type="checkbox"/> STWPOS-R	Steering wheel position - RIGHT-HAND DRIVE	<input type="checkbox"/> PST-BAS1	Passenger seat - Fixed non suspended fold up with seatbelt mounted on cab "B" post
<input type="checkbox"/> STWM-LE	Steering wheel - Leather rim	<input type="checkbox"/> PST-CF4	Passenger seat - Suspended, adjustable shock absorber, travel, backrest & lumbar controls with integrated seatbelt
<input checked="" type="checkbox"/> STGW-AD2	Steering wheel adjustment - Neck tilt, column height and angle	<input type="checkbox"/> PST-CF5	Passenger seat - Suspended with adjustable shock absorber, travel, backrest, lumbar & heat controls with integrated seatbelt
<input type="checkbox"/> ARSL	Additional road speed limit - switch in dashboard	<input type="checkbox"/> PST-RX1	Passenger seat - Fixed non suspended, features: 90-degree rotation and tilt function with seatbelt mounted on cab "B" post
<input checked="" type="checkbox"/> ESP-BAS1	Electronic Stability Control ESC	<input checked="" type="checkbox"/> PST-STD2	Passenger seat - Fixed with backrest adjustment, non suspended with seatbelt mounted on cab "B" post
<input type="checkbox"/> ESPC-RO	Additional ESC functions - Reduced / Off	<input type="checkbox"/> PST-STD4	Passenger seat - Standard suspended with seatbelt mounted on cab "B" post
<input type="checkbox"/> HWSS-AC	Adaptive cruise control with forward collision warning	<input type="checkbox"/> SBPRE-PS	Passenger seat belt pretensioner
<input type="checkbox"/> HWSS-ACB	Adaptive cruise control ACC with forward collision warning and AEBs advanced emergency brake system	<input type="checkbox"/> ARMRE-BB	Armrests - Two on both driver & passenger seats
<input checked="" type="checkbox"/> HWSS-FCB	Forward collision warning with AEBs advanced emergency brake system		
<input checked="" type="checkbox"/> LSS-DW	Lane departure-warning system		
<input checked="" type="checkbox"/> LCS4	Side Collision Avoidance Support - passenger and driver side		
<input type="checkbox"/> DAS-W	Driver Alert Support system		
<input type="checkbox"/> RSENS-W	Rain sensing windscreen wipers		

Standard Equipment Optional Equipment

For more detailed information about cab and powertrain equipment, please refer to separate specification sheets.

For all possible options and combinations of options please consult your Volvo sales contact who can create a specification to match your requirements using the Volvo Sales Support system (VSS).

The factory reserves the right to modify design and change equipment without previous notification. The specification can vary from country to country.

MODEL RANGE

NEW FH Battery Electric 6x2 Tag Tractor - Full Air Suspension FH 62T TE

<input type="checkbox"/> ARMRE-DB	Armrests - Two on the driver seat		
<input type="checkbox"/> ARMRE-PB	Armrests - Two on the passenger seat		colour. Aluminium step inserts. Sunvisor and bumper spoiler in cab colour if specified.
<input type="checkbox"/> ARU-BAS	Armrest upholstery - Vinyl	<input type="checkbox"/> LOCK-CTL	Door locks - Central locking with key
<input type="checkbox"/> ARU-LEA	Armrest upholstery - Leather	<input type="checkbox"/> LOCK-REM	Door locks - Remote central locking
<input checked="" type="checkbox"/> GRABHI-B	Instep cab grab handle - Steel finish	<input checked="" type="checkbox"/> BUMP-B	Plastic front bumper
<input type="checkbox"/> GRABHI-L	Instep cab grab handle - Leather finish	<input type="checkbox"/> BUMP-B2	Front bumper - Steel
<input checked="" type="checkbox"/> FMAT-RUB	Footwell floor mats - Rubber	<input checked="" type="checkbox"/> BUMP-SP	Front bumper spoiler
<input type="checkbox"/> FMAT-TX2	Footwell floor mats - Two sets, Rubber and textile with an embossed pile supplied in the cab	<input type="checkbox"/> CTILT-P-E	Electrically operated hydraulic cab tilt
<input checked="" type="checkbox"/> LBK80F	Lower fixed bunk with wide middle section 815 in the centre x 2000 mm	<input checked="" type="checkbox"/> CTILT-P-M	Manually operated hydraulic cab tilt
<input type="checkbox"/> LBK80FRE	Lower electrically operated recline bunk with wide middle section 815 in the centre x 2000 mm	<input checked="" type="checkbox"/> FCABS-A	Front cab suspension - Air
<input type="checkbox"/> LBK80FRM	Lower manually operated recline bunk with wide middle section 815 in the centre x 2000 mm	<input checked="" type="checkbox"/> FCABS-M	Front cab suspension - Mechanical spring
<input type="checkbox"/> MATL-FI	Firm lower bunk pocket sprung mattress	<input type="checkbox"/> RCABS-A	Rear cab suspension - Air
<input type="checkbox"/> MATL-FI4	Lower mattress - Firm, memory foam, 2000x700x130 mm	<input checked="" type="checkbox"/> RCABS-M	Rear cab suspension - Mechanical spring
<input checked="" type="checkbox"/> MATL-SF	Lower mattress - Flexi-zone semi-firm, pocket springs up to 100kg - 16 stone	<input type="checkbox"/> HCC-EXT	Exterior hood catch - manually operated from the front of the vehicle
<input type="checkbox"/> OLMAT-BA	Mattress overlay protector - 35mm thick		Exterior hood lock - Activated by door lock remote
<input type="checkbox"/> OLMAT-PR	Mattress overlay protector - Premium 50mm thick	<input checked="" type="checkbox"/> HCC-INEX	
<input type="checkbox"/> TBK60AD	Top bunk - Height adjustable foldable 600 x 1900mm	<input checked="" type="checkbox"/> MIRFCPS	Mirrors - Electrically heated and operated main and wide-angle with manually adjusted kerb view mirror on the passenger side and position camera in nearside mirror arm.
<input type="checkbox"/> TBK60F	Top bunk - Fixed foldable 600 x 1900mm	<input type="checkbox"/> MIRFLA3	
<input type="checkbox"/> TBK70AD	Top bunk - Height adjustable foldable 700 x 1900mm	<input checked="" type="checkbox"/> AMIR-F20	Auxiliary front view mirror with a 200mm radius
<input type="checkbox"/> TBK70F	Top bunk - Fixed foldable 700 x 1900mm	<input type="checkbox"/> SUNV-H	External smoke grey sunvisor
<input checked="" type="checkbox"/> SLCP-BAS	Sleeper control panel - Basic with switches for interior light, night heater, roof hatch and door lock	<input type="checkbox"/> AD-ROOF	Cab roof deflector - Adjustable
<input type="checkbox"/> SLCP-LUX	Sleeper control panel - Luxury with switches for interior light, night heater, roof hatch, door lock, alarm clock, window and radio	<input type="checkbox"/> AD-SIDEL	Cab side deflector - Long extension panels
<input type="checkbox"/> SAFE	Driver's safe box - for personal items	<input checked="" type="checkbox"/> ADCF-F	Additional black edging on chassis side skirt
<input type="checkbox"/> RUS-BAS	Rear cab upper storage - 300 mm high	<input type="checkbox"/> HLP-ST	Headlamp protection
<input type="checkbox"/> RUS-HIG	Rear cab upper storage - 440 mm high - volume 245 litres	<input checked="" type="checkbox"/> DRL-LED	V-shaped daytime running lights
<input type="checkbox"/> TABLE	Bunk table - Folding and height adjustable fitted on lower bunk	<input type="checkbox"/> DRIVL2	Two spot lamps
<input type="checkbox"/> REFR-RUS	Fridge - 28 litre rear upper wall mounted with dividers	<input checked="" type="checkbox"/> UDRIVL	Auxiliary driving lights - Without
<input type="checkbox"/> REFRIG	Fridge - 33 litre under-bunk mounted with freezer dividers	<input checked="" type="checkbox"/> FOGL-WC	Front fog lights
<input type="checkbox"/> MICRO-PK	Wiring preparation kit for microwave oven	<input checked="" type="checkbox"/> CL-STAT	Static corner lights
<input checked="" type="checkbox"/> BOTH-D	Bottle holder - One under dashboard centre section	<input type="checkbox"/> ASL-RF2	Two Hella H11 70W spotlamps in sign box
<input type="checkbox"/> BOTH-DL	Bottle holders - Two. One under dashboard centre section and one mounted to the under bunk drawer	<input type="checkbox"/> BEACOA2F	Roof beacons - Two front roof mounted amber LED
<input type="checkbox"/> BOTH-L	Bottle holder - One mounted to the under bunk drawer	<input type="checkbox"/> BEACOA2R	Roof beacons - Two rear roof mounted amber LED
<input type="checkbox"/> COFMA-PK	Coffee maker - Preparation kit.	<input type="checkbox"/> BEACON-P	Roof beacons - switch and wiring preparation only
<input checked="" type="checkbox"/> INLI-BAS	Interior light - White LEDs	<input type="checkbox"/> BEACONA4	Roof beacons - Four amber LED - two front/ two rear
<input type="checkbox"/> INLI-NL	Interior light - White and red nightlight LEDs without dimmer	<input type="checkbox"/> CABPT-R1	Single outlet for roof mounted accessories
<input type="checkbox"/> INLI-NLD	Interior light - White and red nightlight LEDs with dimmer	<input checked="" type="checkbox"/> CABPT-R2	Twin outlets for roof mounted accessories.
<input type="checkbox"/> ARL-FLEX	Flexible reading lamps - Two "snake" type	<input type="checkbox"/> SPOTP-F	Spotlamp preparation in front, max 280W
<input checked="" type="checkbox"/> RH-EE	Fixed tinted glass sky window with emergency exit	<input type="checkbox"/> SPOTP-R	Spotlamp preparation on roof, max 280W
<input type="checkbox"/> RH-ER	Steel roof hatch - Electrically operated, rear opening with emergency exit	<input type="checkbox"/> SPOTP-RF	Spotlamp preparation on cab roof and in cab front, max 2x280W
<input type="checkbox"/> RH-ETR	Tinted glass roof hatch - Electrically operated, rear opening with emergency exit	<input type="checkbox"/> ROS-IL	Globetrotter roof sign illuminated
<input type="checkbox"/> RH-MTR	Tinted glass roof hatch - Manually operated, rear opening with emergency exit	<input type="checkbox"/> ROS-IL2	Preparation kit for illuminated roof sign with switch loose in cab, fit after registration
<input checked="" type="checkbox"/> GLAS-TIN	Cab windows - Tinted	<input type="checkbox"/> ROS-ILP	Roof sign illumination preparation kit
<input type="checkbox"/> SWIND-BS	Cab side window - On both sides behind 'B' post	<input type="checkbox"/> CSGN-GTR	"Globetrotter" headboard logo
<input type="checkbox"/> AS-FUS	Extra shelf in front compartments	<input checked="" type="checkbox"/> HORN-F1S	Horn - Air single tone - chassis mounted
<input type="checkbox"/> INFOT-PK	Preparation kit for the mounting of a flat screen TV in cab above the driver's door, includes bracket, electrical and speaker connections	<input type="checkbox"/> HORN-R2S	Horn - Air - Two roof-mounted
		<input type="checkbox"/> ANT-CBR	Roof mounted antenna for CB radio, single aerial. Only Globetrotter cabs brings in extra DIN slots.
		<input type="checkbox"/> ACCBR-AP	Front, middle & rear roof mounted accessory brackets
		<input type="checkbox"/> ACCBR-F	Front roof mounted accessory bracket
		<input type="checkbox"/> ACCBR-FM	Front & middle roof mounted accessory brackets
		<input type="checkbox"/> ACCBR-FR	Front & rear roof mounted accessory brackets
		<input type="checkbox"/> ACCBR-M	Middle roof mounted accessory bracket
		<input type="checkbox"/> ACCBR-R	Rear roof mounted accessory bracket
		<input type="checkbox"/> ACCBR-RM	Rear & middle roof mounted accessory brackets
		<input type="checkbox"/> STUC-B	Left and right storage compartments under cab

CAB EXTERIOR

- EXTL-EN2** Enhanced complete painted finish - Satin Volvo badges. Main grille, instep, door handles, mirror housing, and bumper in cab

Standard Equipment Optional Equipment

For more detailed information about cab and powertrain equipment, please refer to separate specification sheets.

For all possible options and combinations of options please consult your Volvo sales contact who can create a specification to match your requirements using the Volvo Sales Support system (VSS).

The factory reserves the right to modify design and change equipment without previous notification. The specification can vary from country to country.

MODEL RANGE

NEW FH Battery Electric 6x2 Tag Tractor - Full Air Suspension FH 62T TE

<ul style="list-style-type: none"> <input type="checkbox"/> STUC-L Left storage compartment under cab <input type="checkbox"/> STUC-R Right storage compartment under cab <input type="checkbox"/> RFCAR-BC Rear mudwing carrier, back of cab <input type="checkbox"/> LADDER Ladder back of cab <input type="checkbox"/> REFS-TW White cab conspicuity markings by packed in cab <input type="checkbox"/> REFS-TY Yellow cab conspicuity markings by packed in cab <p>SUPERSTRUCTURE PREPARATIONS</p> <ul style="list-style-type: none"> <input type="checkbox"/> 5WM-ASM Fifth wheel mount - Air operated slider with 50mm L profiles <input type="checkbox"/> 5WM-ISOH Fifth wheel mount - 80mm Z profiles with 10mm ISO plate - 90mm high above chassis frame ■ 5WM-ISOM Fifth wheel mount - 50mm L profiles with 10mm ISO plate - 60mm high above chassis frame ■ 5WT-FO14 Fifth wheel - Fontaine 150SP2 pressed steel <input type="checkbox"/> 5WT-FO15 Fifth wheel - Fontaine 3000 lightweight cast air operated slider - for moderate duty off-road. <input type="checkbox"/> 5WT-JO8 Fifth wheel - Jost JSK 37 cast <input type="checkbox"/> 5WT-JO9 Fifth wheel - Jost JSK 42 cast <input type="checkbox"/> 5WT-SH Fifth wheel - SAF-Holland/+GF+ SK-S 36.20 cast <input type="checkbox"/> 5WH150 Leg-height - 150 mm <input type="checkbox"/> 5WH175 Leg-height - 175mm <input type="checkbox"/> 5WH185 Leg-height - 185 mm <input type="checkbox"/> 5WH190 Leg-height - 190 mm <input type="checkbox"/> 5WH195 Leg-height - 195mm <input type="checkbox"/> 5WH205 Leg-height - 205 mm <input type="checkbox"/> 5WH210 Leg-height - 210 mm <input type="checkbox"/> 5WH220 Leg-height - 220mm ■ 5WLM-B Maintenance - Basic fifth wheel - standard top plate <input type="checkbox"/> 5WLM-L Maintenance - Low maintenance with nylon top plate <input type="checkbox"/> 5WL-S1 Fifthwheel lubrication - Locking mechanism and top plate <input type="checkbox"/> 5WL-S2 Fifthwheel lubrication - Locking mechanism only <input type="checkbox"/> TCIND Trailer connection indicator - Sensors for height, kingpin and coupling lock ■ RDECK Catwalk - Single plate and step <input type="checkbox"/> RDECK-M Catwalk - Extended with two plates and step <input type="checkbox"/> SRWL-2RA Chassis-mounted working lamps - Two amber rear-mounted LED lamps and 3 position switch <input type="checkbox"/> SRWL-2RW Chassis-mounted working lamps - Two white rear-mounted LED lamps and 3 position switch <input type="checkbox"/> SRWL-PK Chassis-mounted working lamps - Side work and reverse lamp preparation and 3 position switch - Max load 280W <input type="checkbox"/> SWL-2RA Chassis-mounted working lamps - Two amber rear-mounted LED lamps <input type="checkbox"/> SWL-2RW Chassis-mounted working lamps - Two white rear-mounted LED lamps <input type="checkbox"/> SWL-PK Chassis-mounted working lamps - Side work lamp preparation and 2 position switch - Max load 280W ■ WL-TA1W Coupling light - White <input type="checkbox"/> WLC-H2A Two H3/70W working lamps with amber coloured lens high mounted back of cab <input type="checkbox"/> WLC-H2W Two H3/70W white working lamps high mounted on the back of cab <input type="checkbox"/> WLC-PKH Preparation kit, cables and switch for high mounted working lamps back of cab <input type="checkbox"/> WLC-PKL Preparation kit, cables and switch for low mounted working lamps back of cab <input type="checkbox"/> WLC-PKLH Preparation kit - cables and switch for low and high mounted working lamps back of cab. ■ ECBB-HIG Body builder electrical centre with body builder module ■ BBCHAS1 One 7-pole connector for Body builder interface <input type="checkbox"/> BBCHAS3 Three 7-pole connectors for Body builder interface <input type="checkbox"/> BEPR-T2 Body builder electrical software preparation for tipper with remote control <input type="checkbox"/> EXSTER External steering control - Volvo dynamic steering and bodybuilder module prepared for external control system, installed and computer by bodybuilder 	<ul style="list-style-type: none"> ■ TD-LED Trailer detection with LED sensing <input type="checkbox"/> AUXL-SPK Electrical preparation kit - wiring and switch for snow plough lights <input type="checkbox"/> TAILPRE2 Tail lift preparation kit, wireless remote operation <input type="checkbox"/> TAILPREP Taillift preparation kit - cab switch and warning in driver display <input type="checkbox"/> AESW2 Two Body builder bistable electrical switches (marked AUX1 / AUX2) <input type="checkbox"/> AESW2PK 2 Body builder bistable el.switches (marked AUX1/AUX2) and prep. for 4 more switches <input type="checkbox"/> AUXSW-4 Wiring for 4 extra switches (from Body builder electrical centre to switch positions) <p>DELIVERY SERVICES</p> <ul style="list-style-type: none"> <input type="checkbox"/> FMS-PK Fleet Management System gateway - required for aftermarket telematics <input type="checkbox"/> DRUT1 Driver utility app - "My Truck" - 1 year subscription For mobile phone, tablet, with android and IOS systems. Only available with Volvo Connect subscription <input type="checkbox"/> DRUT2 Driver utility app - "My Truck" - 2 year subscription For mobile phone, tablet, with android and IOS systems. Only available with Volvo Connect subscription <input type="checkbox"/> DRUT3 Driver utility app - "My Truck" - 3 year subscription For mobile phone, tablet, with android and IOS systems. Only available with Volvo Connect subscription <input type="checkbox"/> DRUT4 Driver utility app - "My Truck" - 4 year subscription For mobile phone, tablet, with android and IOS systems. Only available with Volvo Connect subscription <input type="checkbox"/> DRUT5 Driver utility app - "My Truck" - 5 year subscription For mobile phone, tablet, with android and IOS systems. Only available with Volvo Connect subscription
---	---

■ Standard Equipment □ Optional Equipment

For more detailed information about cab and powertrain equipment, please refer to separate specification sheets.

For all possible options and combinations of options please consult your Volvo sales contact who can create a specification to match your requirements using the Volvo Sales Support system (VSS).

The factory reserves the right to modify design and change equipment without previous notification. The specification can vary from country to country.

MODEL RANGE

NEW FH Battery Electric 6x2 Tag Tractor - Full Air Suspension FH 62T TE

Volvo Trucks. Driving Progress