


MODEL RANGE

NEW FH Battery Electric 6x4 Tractor - Full Air Suspension FH 64T E

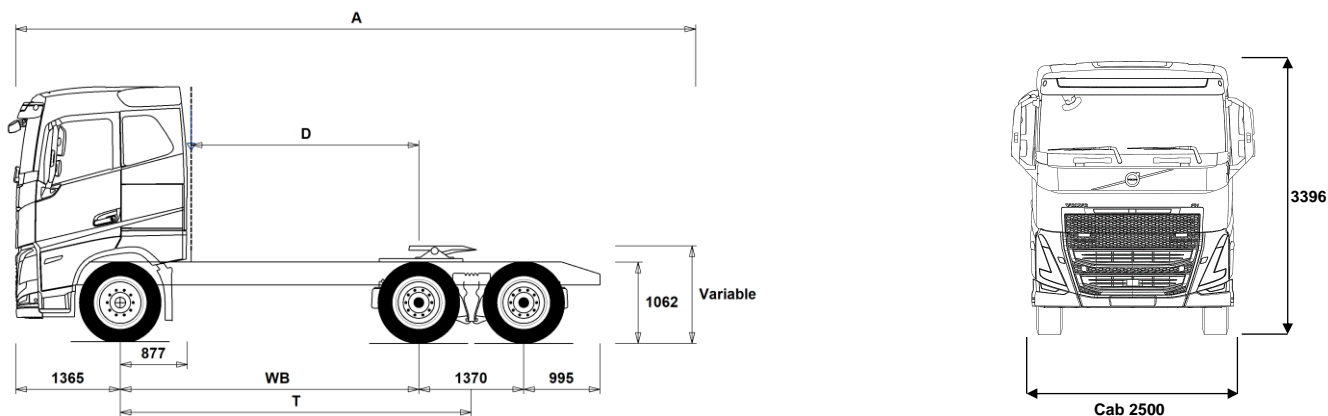

Chassis Dimensions [mm]

WB Wheelbase	3900
A Overall Chassis Length	8882
D Center of rear axle to back of cab	2973
F Fifth Wheel Position (EC Directive 96/53)	775
T Theoretical Wheelbase	4585

Chassis Weights [kg]

Front Axle	6345
Rear Bogie	5275
Kerb Weight	11620

Turning Diameter [mm]

Turning Circle Diameter Kerb to Kerb	16100
Turning Circle Diameter Wall to Wall	17400

Plated Weights [kg]

	Plated	Design
Gross Vehicle Weight	26000	29500
Gross Combination Weight	44000	44000
Front Axle	8000	8500
Rear Bogie	19000	21000

Important Notes

Chassis Dimensions

Cab Height: +375 mm for CAB-HSLP, -203 mm for CAB-LSLP, +517 mm for CAB-XHSL.

D-measure includes a front clearance of 50 mm and for rigid trucks also a subframe of 100 mm.

Height can vary ± 20 mm for leaf and ± 10 mm for air suspension. All dimensions are for unladen chassis and any tag axles down.

Weight and dimensions are based upon the following tyres:

Front Axle Tyres:	315/80R22.5
Drive Axle Tyres:	315/80R22.5

Chassis weight includes oil, water, AdBlue, 0 litres fuel and without driver. Kerb weight can vary ± 10%.

Turning diameters are theoretically calculated.

Legal weights can differ from country to country.

For more detailed weight information, including optional equipment weights, ask your Volvo sales contact to enter your specification into the Volvo Weight Information system (WIS).

Do NOT use this drawing for bodybuilding. Refer to Volvo Bodybuilder Instructions and chassis assembly drawing FH64TE.

MODEL RANGE

NEW FH Battery Electric 6x4 Tractor - Full Air Suspension FH 64T E

TRUCK USE

- **RC-SMOOT** Road Conditions - Smooth

CORE COMPONENTS

- **CHH-HIGH** Chassis Height - High - for loading heights check the unique BEP chassis drawing attached to this quote
- **RADD-GR** RADD-GR - 6x4/8x4 Air - High
- **FHE-HSLP** Cab - Globetrotter - all-steel safety cage design with a roof-mounted emergency escape hatch. Designed and built to Swedish impact and ECE R29 regulations
- **FHE-LSLP** Cab - Low sleeper - with steel safety cage design. Designed and built to Swedish impact and ECE R29 regulations
- **FHE-SLP** Cab - Sleeper - all-steel safety cage design with a roof-mounted emergency escape hatch. Designed and built to Swedish impact and ECE R29 regulations
- **FHE-XHSL** Cab - Globetrotter XL - all-steel safety cage design with a roof-mounted emergency escape hatch. Designed and built to Swedish impact and ECE R29 regulations
- **EPT2412** Gearbox - I-shift Automated 12-speed - suitable for gross train weights up to 44tonne
- **NEM3** Electric Motors - 3 - Output 490 kW – 666hp continuous power
- **RTS2370A** Drive Axles - RTS2370A 23-tonne single reduction tandem with differential and cross locks*- design GCW 70tonne
* Cross locks replaced by a dog clutch if tandem axle lift is specified

PACKAGES

- **INFONDF** Media Information Platform with Navigation & Volvo Connect "On board" Support
- **DRIV-E** Cab Package - Drive
- **DRIV-E+** Cab Package - Drive +
- **DRIV-E++** Cab Package - Drive +
- **1LIV-E** Sleep & Resting Package - Living one-bed
- **1LIV-E+** Sleep & Resting Package - Living one-bed +
- **1LIV-E++** Sleep & Resting Package - Living one-bed ++
- **2LIV-E** Sleep & Resting Package - Living two-bed
- **2LIV-E+** Sleep & Resting Package - Living two-bed +
- **2LIV-E++** Sleep & Resting Package - Living two-bed ++
- **SAFE-E** Active safety package
- **SAFE-E+** Active safety package +
- **RANGOPT5** Range Optimisation Package - 5 years prepaid subscription

CHASSIS

- **FST-AIR** Front suspension type - Air
- **FSL-BAS** Front suspension levelling - basic stroke
- **FAL10.0** Front axle design capacity - 10 tonne - check tyre capacity
- **FAL8.5** Front axle design capacity - 8.5 tonnes
- **FAL9.0** Front axle design capacity - 9.0 tonne - check tyre capacity
- **FSTAB** Front anti-roll bar - Normal stiffness
- **FSTAB2** Front anti-roll bar - Medium stiffness
- **FSTAB3** Front anti-roll bar - High stiffness
- **RAL21** Rear bogie design capacity - 21 tonne
- **RAL23** Rear bogie design capacity - 23 tonne
- **RAL26** Rear bogie design capacity - 26 tonne
- **RSTAB1** Rear anti-roll bar - Normal stiffness
- **RSTAB3** Rear anti-roll bar - Stiff
- **RALIM105** Rear-axle load limiter - 10.5 tonne - speed controlled
- **RALIM115** Rear-axle load limiter -11.5 tonne - speed controlled
- **RALIM13** Rear-axle load limiter - 13 tonne
- **RALIM95** Rear-axle load limiter - 9.5 tonne
- **ASF-DL1** Air suspension with 1 driving level
- **ASF-DL3** Air suspension with 3 driving levels

- Standard Equipment
- Optional Equipment

For more detailed information about cab and powertrain equipment, please refer to separate specification sheets.

For all possible options and combinations of options please consult your Volvo sales contact who can create a specification to match your requirements using the Volvo Sales Support system (VSS).

The factory reserves the right to modify design and change equipment without previous notification. The specification can vary from country to country.

- **ACTST-TO** Active Steering- Volvo Dynamic Steering - VDS - with extra electronic pump and torque overlay
 - **ASFE-BAS** Active steering feature - Basic - Volvo Dynamic Steering - VDS - only
 - **ASFE-OG** Active steering feature - Volvo Dynamic Steering - VDS - with stability assist - oversteer
 - **ASFE-PO** Active steering feature - Volvo Dynamic Steering - VDS - with personal settings and stability assist
 - **ASFE-PS** Active steering feature - Volvo Dynamic Steering - VDS - with personal settings
 - **AUXPARK** Auxiliary parking brake - Additional spring brakes
 - **RST-AIR** Rear suspension type - Air
 - **FRAME300** Chassis frame section external height - 300 mm
 - **FST8080** Chassis frame thickness - 8 mm web and flange
 - **FIL-EEEB** Chassis frame inner liner - From the end of the engine to the end of the bogie
 - **FIL-TXEB** Chassis frame inner liner - From gearbox member to the end of the bogie
 - **BBOX-EF** Battery box position - End of the frame in rear overhang
 - **BATTAMP** Battery management - Voltage and current gauge
 - **BATTIND** Battery management - Voltage, current and charge indicators
 - **WHC-FOL1** One foldable wheel chock
 - **WHC-FOL2** Two foldable wheel chocks
 - **WHCP-F** Wheel chock carrier position - In the front part of the vehicle
 - **WHCP-T** Wheel chock carrier position - Outer luggage locker
 - **CHAIN-S** Snow chains
 - **HOOK-SC** Snow chain hooks
 - **TOWF-NO1** Front towing device - One detachable - stored in cab
 - **TOWF-NO2** Front towing device - Two detachable - stored in cab
 - **TOWR-ONE** Towing hitch attached to rear crossmember
 - **TREL15** Trailer electrical connection - Single 15 pin - ADR certified
 - **TREL7-7** Trailer electrical connection - 2 x 7 pin - 24N and 24S
 - **TBC-DUO** Trailer brake connections - Duomatic type
 - **TBC-EC** Trailer brake connections - EC palm coupling connectors
 - **TBC-GBR** Trailer brake connections - 'C' and 'CA' type
 - **TRBR-HCF** Full pressure hand controlled trailer brake
 - **TRBR-STA** Stationary trailer brake control
 - **TRB-STRE** Stretch Brake - Automatic low speed trailer brake activation to avoid jack-knifing and improve steerability
 - **RFEND-B** Rear mud wings - Three piece EC approved and spray flaps
 - **RFH-BAS** Basic rear wing height
 - **RFH-HIG** High rear wing height - higher wing tops
 - **RFH-LOW** Lower rear wing height - shallower wing tops
 - **BLIGHT-E** Emergency brake light
- ### WHEELS & TYRES
- **RT-AL** Wheels - Alcoa brushed aluminium rims - standard holes for long stud fixing
 - **RT-ALDP** Wheels - Alcoa Dura-Bright aluminium rims - standard holes for long stud fixing
 - **RT-ALDPD** Wheels - Alcoa Dura-Bright EVO aluminium rims - countersunk holes for short stud fixing
 - **RT-ALDU** Wheels - Alcoa brushed aluminium rims - countersunk holes for short stud fixing
 - **RT-STEEL** Wheels - Steel rims
 - **SPWT-D** Spare wheel & tyre with rear tyre pattern
 - **SPWT-F** Spare wheel & tyre with front tyre pattern
 - **SWCP-T** Spare wheel supplied temporarily strapped to chassis
 - **SWCP-TP** Temporary spare wheel carrier on top of chassis frame
 - **JACK-12T** 12 tonne bottle jack
 - **JACK-15T**

MODEL RANGE

NEW FH Battery Electric 6x4 Tractor - Full Air Suspension FH 64T E

<input type="checkbox"/> JACK-20T		<input checked="" type="checkbox"/> BUPMON	Back up monitor - Digital reverse camera, parameter & lead supplied loose in cab.
<input checked="" type="checkbox"/> TOOL-BAS	Basic Toolkit	<input type="checkbox"/> ISUNS-BS	Side sun visor - Driver & passenger side
<input type="checkbox"/> TOOLKIT	Complete tool kit	<input checked="" type="checkbox"/> ISUNS-DS	Side sun visor - Driver-side
<input type="checkbox"/> INFLAHOS	Tyre inflation hose	<input type="checkbox"/> ISUNF-RE	Electrically operated textile interior sun blind
<input type="checkbox"/> GAUGE-TP	Tyre pressure gauge	<input checked="" type="checkbox"/> ISUNF-RM	Manually operated textile interior sun blind
DRIVELINE EQUIPMENT		<input checked="" type="checkbox"/> CSPL-BX	Lower center dash open storage box
<input checked="" type="checkbox"/> DRM-BE	Drive Mode - Balanced & Economy	<input type="checkbox"/> CSPL-BXD	Lower centre dash drawer
<input checked="" type="checkbox"/> PVT-MAP	I-See Predictive Cruise Control - using map based topography information	<input type="checkbox"/> ADFS	Two extra DIN slots in front shelf - can be fitted with card or drawer available as an accessory
<input type="checkbox"/> EP400A	Electric Power Outlet Voltage - 400V AC	<input checked="" type="checkbox"/> BUPALARM	Reverse alarm
<input type="checkbox"/> PTR-D	Gearbox PTO for plug-in pump, 0.71xeng speed	<input type="checkbox"/> RTOLL-PK	Road toll PREPARATION kit for trucks operating with "Toll Collect" in Germany
<input type="checkbox"/> PTR-DH	Gearbox driven high speed PTO for one plug-in hydraulic pump	<input checked="" type="checkbox"/> LOADIND	Load indicator with central dashboard display
<input type="checkbox"/> PTR-DM	Gearbox driven medium speed PTO for one plug-in hydraulic pump	<input type="checkbox"/> REMC-MF	Multi-functio wireless remote control
<input type="checkbox"/> PTR-F	Gearbox driven PTO with rear flange connection	<input checked="" type="checkbox"/> FIREXT3S	Fire extinguisher - 3kg mounted on the seat base
<input type="checkbox"/> PTR-FH	Gearbox driven high speed PTO with SAE drive flange	<input type="checkbox"/> WARNVEST	High visibility warning vest - no sleeves
<input type="checkbox"/> PTR-FL	Gearbox driven low speed PTO with SAE drive flange	<input checked="" type="checkbox"/> WARNTRI2	Roadside hazard warning triangle
<input type="checkbox"/> PTRD-D	Gearbox driven HIGH SPEED PTO for two plug-in hydraulic pumps	<input type="checkbox"/> AIDKIT	First aid kit - Legal demand for EU markets including delivery to EU bodybuilder
<input type="checkbox"/> PTRD-D1	PTRD-D1 Gearbox driven HIGH SPEED PTO (1 SAE flange & 1 plug-in hydraulic pump)	<input type="checkbox"/> AIDKIT1B	First aid kit - Legal demand for trucks transiting Germany
<input type="checkbox"/> PTRD-D2	Gearbox driven HIGH SPEED PTO (2 SAE flanges & 1 plug-in hyd pump)	<input type="checkbox"/> WARNLAMP	Portable warning lamp
<input type="checkbox"/> PTRD-F	PTO with 1 DIN + 1 flange connection rear, manual gearbox	<input type="checkbox"/> LAMP-IN	Inspection lamp
<input type="checkbox"/> HPG-F101	Parker F1-101 gearbox mounted, fixed displacement, single flow, hydraulic pump	<input type="checkbox"/> BULBKIT	Bulb and fuse kit
<input type="checkbox"/> HPG-F41	Parker F1-41 gearbox mounted, fixed displacement, single flow, hydraulic pump	<input type="checkbox"/> WRITEPAD	Writing pad
<input type="checkbox"/> HPG-F51	Parker F1-51 gearbox mounted, fixed displacement, single flow, hydraulic pump	<input checked="" type="checkbox"/> DST-CF4	Driver seat - Suspended, adjustable shock absorber, travel, backrest & lumbar controls with integrated seatbelt
<input type="checkbox"/> HPG-F61	Parker F1-61 gearbox mounted, fixed displacement, single flow, hydraulic pump	<input type="checkbox"/> DST-CF5	Driver seat - Suspended with adjustable shock absorber, travel, backrest, lumbar & heat controls with integrated seatbelt
<input type="checkbox"/> HPG-F81	Parker F1-81 gearbox mounted, fixed displacement, single flow, hydraulic pump	<input type="checkbox"/> DST-CF6	Driver seat - Suspended with adjustable shock absorber, travel, backrest, lumbar, heat and ventilation controls with integrated seatbelt
<input checked="" type="checkbox"/> CRUIS-E	Eco cruise control (with eco-roll and I-cruise, controls in steering wheel)	<input type="checkbox"/> DST-LUX1	Driver seat - Deluxe 1: electrical adjustment with memory function, lumbar support, heating & ventilation with integrated seatbelt
<input checked="" type="checkbox"/> STWPOS-R	Steering wheel position - RIGHT-HAND DRIVE	<input type="checkbox"/> DST-LUX2	Driver seat - Deluxe 2: electrical adjustment with memory function, lumbar support & heating with integrated seatbelt
<input type="checkbox"/> STWM-LE	Steering wheel - Leather rim	<input type="checkbox"/> SBD-RED	Seat belt colour - Red
<input checked="" type="checkbox"/> STGW-AD2	Steering wheel adjustment - Neck tilt, column height and angle	<input type="checkbox"/> PST-BAS1	Passenger seat - Fixed non suspended fold up with seatbelt mounted on cab "B" post
<input type="checkbox"/> ARSL	Additional road speed limit - switch in dashboard	<input type="checkbox"/> PST-CF4	Passenger seat - Suspended, adjustable shock absorber, travel, backrest & lumbar controls with integrated seatbelt
<input checked="" type="checkbox"/> ESP-BAS1	Electronic Stability Control ESC	<input type="checkbox"/> PST-CF5	Passenger seat - Suspended with adjustable shock absorber, travel, backrest, lumbar & heat controls with integrated seatbelt
<input type="checkbox"/> ESPC-RO	Additional ESC functions - Reduced / Off	<input type="checkbox"/> PST-RX1	Passenger seat - Fixed non suspended, features: 90-degree rotation and tilt function with seatbelt mounted on cab "B" post
<input type="checkbox"/> HWSS-AC	Adaptive cruise control with forward collision warning	<input checked="" type="checkbox"/> PST-STD2	Passenger seat - Fixed with backrest adjustment, non suspended with seatbelt mounted on cab "B" post
<input type="checkbox"/> HWSS-ACB	Adaptive cruise control ACC with forward collision warning and AEBS advanced emergency brake system	<input type="checkbox"/> PST-STD4	Passenger seat - Standard suspended with seatbelt mounted on cab "B" post
<input checked="" type="checkbox"/> HWSS-FCB	Forward collision warning with AEBS advanced emergency brake system	<input type="checkbox"/> SBPRE-PS	Passenger seat belt pretensioner
<input checked="" type="checkbox"/> LSS-DW	Lane departure-warning system	<input type="checkbox"/> ARMRE-BB	Armrests - Two on both driver & passenger seats
<input checked="" type="checkbox"/> LCS4	Side Collision Avoidance Support - passenger and driver side	<input type="checkbox"/> ARMRE-DB	Armrests - Two on the driver seat
<input type="checkbox"/> DAS-W	Driver Alert Support system	<input type="checkbox"/> ARMRE-PB	Armrests - Two on the passenger seat
<input type="checkbox"/> RSENS-W	Rain sensing windscreen wipers	<input type="checkbox"/> ARU-BAS	Armrest upholstery - Vinyl
<input checked="" type="checkbox"/> CU-ECC	Cab Climate Unit - Electrically controlled air conditioning with sun sensor	<input type="checkbox"/> ARU-LEA	Armrest upholstery - Leather
<input type="checkbox"/> CU-ECC2	Cab Climate Unit - Electrically controlled air conditioning with a carbon filter, sun, mist, and air quality sensor	<input checked="" type="checkbox"/> GRABHI-B	Instep cab grab handle - Steel finish
<input checked="" type="checkbox"/> IMMOBIL	Thatcham H2 approved immobiliser	<input type="checkbox"/> GRABHI-L	Instep cab grab handle - Leather finish
<input type="checkbox"/> ALARM-E	Enhanced vehicle alarm - Thatcham H1 approved - Cab plus external sensor for body/trailer	<input checked="" type="checkbox"/> FMAT-RUB	Footwell floor mats - Rubber
<input type="checkbox"/> AMPL400	Radio amplifier, 8 channel, 400 W with subwoofer Located in right hand external storage box	<input type="checkbox"/> FMAT-TX2	Footwell floor mats - Two sets, Rubber and textile with an embossed pile supplied in the cab
<input checked="" type="checkbox"/> Standard Equipment		<input type="checkbox"/> Optional Equipment	

For more detailed information about cab and powertrain equipment, please refer to separate specification sheets.

For all possible options and combinations of options please consult your Volvo sales contact who can create a specification to match your requirements using the Volvo Sales Support system (VSS).

The factory reserves the right to modify design and change equipment without previous notification. The specification can vary from country to country.

MODEL RANGE

NEW FH Battery Electric 6x4 Tractor - Full Air Suspension FH 64T E

■ LBK80F	Lower fixed bunk with wide middle section 815 in the centre x 2000 mm	□ FCABS-A	Front cab suspension - Air
□ LBK80FRE	Lower electrically operated recline bunk with wide middle section 815 in the centre x 2000 mm	■ FCABS-M	Front cab suspension - Mechanical spring
□ LBK80FRM	Lower manually operated recline bunk with wide middle section 815 in the centre x 2000 mm	□ RCABS-A	Rear cab suspension - Air
□ MATL-FI	Firm lower bunk pocket sprung mattress	■ RCABS-M	Rear cab suspension - Mechanical spring
□ MATL-FI4	Lower mattress - Firm, memory foam, 2000x700x130 mm	□ HCC-EXT	Exterior hood catch - manually operated from the front of the vehicle
■ MATL-SF	Lower mattress - Flexi-zone semi-firm, pocket springs up to 100kg - 16 stone	■ HCC-INEX	Exterior hood lock - Activated by door lock remote
□ OLMAT-BA	Mattress overlay protector - 35mm thick	■ MIRCFPCS	Mirrors - Electrically heated and operated main and wide-angle with manually adjusted kerb view mirror on the passenger side and position camera in nearside mirror arm.
□ OLMAT-PR	Mattress overlay protector - Premium 50mm thick	□ MIRFLA3	
□ TBK60AD	Top bunk - Height adjustable foldable 600 x 1900mm	■ AMIR-F20	Auxiliary front view mirror with a 200mm radius
□ TBK60F	Top bunk - Fixed foldable 600 x 1900mm	□ SUNV-H	External smoke grey sunvisor
□ TBK70AD	Top bunk - Height adjustable foldable 700 x 1900mm	□ AD-ROOF	Cab roof deflector - Adjustable
□ TBK70F	Top bunk - Fixed foldable 700 x 1900mm	□ AD-SIDEL	Cab side deflector - Long extension panels
■ SLCP-BAS	Sleeper control panel - Basic with switches for interior light, night heater, roof hatch and door lock	■ ADCF-F	Additional black edging on chassis side skirt
□ SLCP-LUX	Sleeper control panel - Luxury with switches for interior light, night heater, roof hatch, door lock, alarm clock, window and radio	□ HLP-ST	Headlamp protection
□ SAFE	Driver's safe box - for personal items	■ DRL-LED	V-shaped daytime running lights
□ RUS-BAS	Rear cab upper storage - 300 mm high	□ DRIVL2	Two spot lamps
□ RUS-HIG	Rear cab upper storage - 440 mm high - volume 245 litres	■ UDRIVL	Auxiliary driving lights - Without
□ TABLE	Bunk table - Folding and height adjustable fitted on lower bunk	■ FOGL-WC	Front fog lights
□ REFR-RUS	Fridge - 28 litre rear upper wall mounted with dividers	■ CL-STAT	Static corner lights
□ REFRIG	Fridge - 33 litre under-bunk mounted with freezer dividers	□ ASL-RF2	Two Hella H11 70W spotlamps in sign box
□ MICRO-PK	Wiring preparation kit for microwave oven	□ BEACOA2F	Roof beacons - Two front roof mounted amber LED
■ BOTH-D	Bottle holder - One under dashboard centre section	□ BEACOA2R	Roof beacons - Two rear roof mounted amber LED
□ BOTH-DL	Bottle holders - Two. One under dashboard centre section and one mounted to the under bunk drawer	□ BEACON-P	Roof beacons - switch and wiring preparation only
□ BOTH-L	Bottle holder - One mounted to the under bunk drawer	□ BEACONA4	Roof beacons - Four amber LED - two front/ two rear
□ COFMA-PK	Coffee maker - Preparation kit.	□ CABPT-R1	Single outlet for roof mounted accessories
■ INLI-BAS	Interior light - White LEDs	■ CABPT-R2	Twin outlets for roof mounted accessories.
□ INLI-NL	Interior light - White and red nightlight LEDs without dimmer	□ SPOTP-F	Spotlamp preparation in front, max 280W
□ INLI-NLD	Interior light - White and red nightlight LEDs with dimmer	□ SPOTP-R	Spotlamp preparation on roof, max 280W
□ ARL-FLEX	Flexible reading lamps - Two "snake" type	□ SPOTP-RF	Spotlamp preparation on cab roof and in cab front, max 2x280W
■ RH-EE	Fixed tinted glass sky window with emergency exit	□ ROS-IL	Globetrotter roof sign illuminated
□ RH-ER	Steel roof hatch - Electrically operated, rear opening with emergency exit	□ ROS-IL2	Preparation kit for illuminated roof sign with switch loose in cab, fit after registration
□ RH-ETR	Tinted glass roof hatch - Electrically operated, rear opening with emergency exit	□ ROS-ILP	Roof sign illumination preparation kit
□ RH-MTR	Tinted glass roof hatch - Manually operated, rear opening with emergency exit	□ CSGN-GTR	"Globetrotter" headboard logo
■ GLAS-TIN	Cab windows - Tinted	■ HORN-F1S	Horn - Air single tone - chassis mounted
□ SWIND-BS	Cab side window - On both sides behind 'B' post	□ HORN-R2S	Horn - Air - Two roof-mounted
□ AS-FUS	Extra shelf in front compartments	□ ANT-CBR	Roof mounted antenna for CB radio, single aerial. Only Globetrotter cabs brings in extra DIN slots.
□ INFOT-PK	Preparation kit for the mounting of a flat screen TV in cab above the driver's door, includes bracket, electrical and speaker connections	□ ACCBR-AP	Front, middle & rear roof mounted accessory brackets
CAB EXTERIOR			
■ EXTL-EN2	Enhanced complete painted finish - Satin Volvo badges. Main grille, instep, door handles, mirror housing, and bumper in cab colour. Aluminium step inserts. Sunvisor and bumper spoiler in cab colour if specified.	□ ACCBR-F	Front roof mounted accessory bracket
□ LOCK-CTL	Door locks - Central locking with key	□ ACCBR-FM	Front & middle roof mounted accessory brackets
□ LOCK-REM	Door locks - Remote central locking	□ ACCBR-FR	Front & rear roof mounted accessory brackets
■ BUMP-B	Plastic front bumper	□ ACCBR-M	Middle roof mounted accessory bracket
□ BUMP-B2	Front bumper - Steel	□ ACCBR-R	Rear roof mounted accessory bracket
■ BUMP-SP	Front bumper spoiler	□ ACCBR-RM	Rear & middle roof mounted accessory brackets
□ CTILTP-E	Electrically operated hydraulic cab tilt	□ STUC-B	Left and right storage compartments under cab
■ CTILTP-M	Manually operated hydraulic cab tilt	□ STUC-L	Left storage compartment under cab
		□ STUC-R	Right storage compartment under cab
		□ RFCAR-BC	Rear mudwing carrier, back of cab
		□ LADDER	Ladder back of cab
		□ REFS-TW	White cab conspicuity markings by packed in cab
		□ REFS-TY	Yellow cab conspicuity markings by packed in cab
SUPERSTRUCTURE PREPARATIONS			
		■ 5WM-ISOM	Fifth wheel mount - 50mm L profiles with 10mm ISO plate - 60mm high above chassis frame

■ Standard Equipment

□ Optional Equipment

For more detailed information about cab and powertrain equipment, please refer to separate specification sheets.

For all possible options and combinations of options please consult your Volvo sales contact who can create a specification to match your requirements using the Volvo Sales Support system (VSS).

The factory reserves the right to modify design and change equipment without previous notification. The specification can vary from country to country.

MODEL RANGE

NEW FH Battery Electric 6x4 Tractor - Full Air Suspension FH 64T E

- **5WT-JO8** Fifth wheel - Jost JSK 37 cast
- **5WT-JO9** Fifth wheel - Jost JSK 42 cast
- **5WT-SH** Fifth wheel - SAF-Holland/+GF+ SK-S 36.20 cast
- **5WH150** Leg-height - 150 mm
- **5WH185** Leg-height - 185 mm
- **5WLM-B** Maintenance - Basic fifth wheel - standard top plate
- **5WL-S1** Fifthwheel lubrication - Locking mechanism and top plate
- **TCIND** Trailer connection indicator - Sensors for height, kingpin and coupling lock
- **RDECK** Catwalk - Single plate and step
- **RDECK-M** Catwalk - Extended with two plates and step
- **SRWL-2RA** Chassis-mounted working lamps - Two amber rear-mounted LED lamps and 3 position switch
- **SRWL-2RW** Chassis-mounted working lamps - Two white rear-mounted LED lamps and 3 position switch
- **SRWL-PK** Chassis-mounted working lamps - Side work and reverse lamp preparation and 3 position switch - Max load 280W
- **SWL-2RA** Chassis-mounted working lamps - Two ambe rear-mounted LED lamps
- **SWL-2RW** Chassis-mounted working lamps - Two white rear-mounted LED lamps
- **SWL-PK** Chassis-mounted working lamps - Side work lamp preparation and 2 position switch - Max load 280W
- **WL-TA1W** Coupling light - White
- **WLC-H2A** Two H3/70W working lamps with amber coloured lens high mounted back of cab
- **WLC-H2W** Two H3/70W white working lamps high mounted on the back of cab
- **WLC-PKH** Preparation kit, cables and switch for high mounted working lamps back of cab
- **WLC-PKL** Preparation kit, cables and switch for low mounted working lamps back of cab
- **WLC-PKLH** Preparation kit - cables and switch for low and high mounted working lamps back of cab.
- **ECBB-HIG** Body builder electrical centre with body builder module
- **BBCHAS1** One 7-pole connector for Body builder interface
- **BBCHAS3** Three 7-pole connectors for Body builder interface
- **BEPR-T2** Body builder electrical software preparation for tipper with remote control
- **EXSTER** External steering control - Volvo dynamic steering and bodybuilder module prepared for external control system, installed and computer by bodybuilder
- **TD-LED** Trailer detection with LED sensing
- **AUXL-SPK** Electrical preparation kit - wiring and switch for snow plough lights
- **TAILPRE2** Tail lift preparation kit, wireless remote operation
- **TAILPREP** Taillift preparation kit - cab switch and warning in driver display
- **AESW2** Two Body builder bistable electrical switches (marked AUX1 / AUX2)
- **AESW2PK** 2 Body builder bistable el.switches (marked AUX1/AUX2) and prep. for 4 more switches
- **AUXSW-4** Wiring for 4 extra switches (from Body builder electrical centre to switch positions)

□ **DRUT4**

□ **DRUT5**

Only available with Volvo Connect subscription
 Driver utility app - "My Truck" - 4 year subscription
 For mobile phone, tablet, with android and IOS systems.
 Only available with Volvo Connect subscription
 Driver utility app - "My Truck" - 5 year subscription
 For mobile phone, tablet, with android and IOS systems.
 Only available with Volvo Connect subscription

DELIVERY SERVICES

- **FMS-PK** Fleet Management System gateway - required for aftermarket telematics
- **DRUT1** Driver utility app - "My Truck" - 1 year subscription
For mobile phone, tablet, with android and IOS systems.
Only available with Volvo Connect subscription
- **DRUT2** Driver utility app - "My Truck" - 2 year subscription
For mobile phone, tablet, with android and IOS systems.
Only available with Volvo Connect subscription
- **DRUT3** Driver utility app - "My Truck" - 3 year subscription
For mobile phone, tablet, with android and IOS systems.

■ Standard Equipment

□ Optional Equipment

For more detailed information about cab and powertrain equipment, please refer to separate specification sheets.

For all possible options and combinations of options please consult your Volvo sales contact who can create a specification to match your requirements using the Volvo Sales Support system (VSS).

The factory reserves the right to modify design and change equipment without previous notification.
 The specification can vary from country to country.

MODEL RANGE

NEW FH Battery Electric 6x4 Tractor - Full Air Suspension FH 64T E

Volvo Trucks. Driving Progress